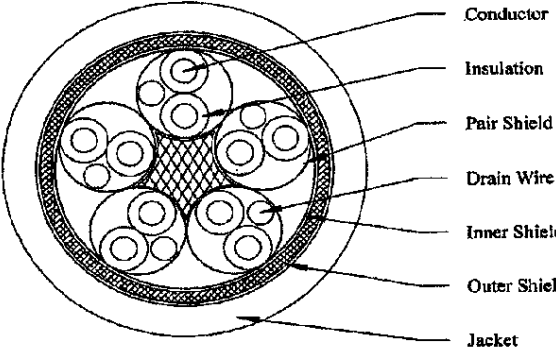



TOTAL P.02

5 PAIR 18 AWG CABLE			
	ELECTRICAL CHARACTERISTICS		
	Conductor DC Resistance: 0.0064 Ohms/ft Nominal @ 20°C		
	SAFETY CERTIFICATION		
	UL Recognized: AWM Style 2464 80°C 300 Volts VW-1 RoHS Compliance: In Accordance to European Directive 2002/95/EC, Issue 13.2.2003		
CONSTRUCTION			
<b>Pair Component</b> Conductor: 18 AWG 7/26 Tin Plated Copper, 0.048 Inch Diameter Insulation: 0.016 Inches of XPbT, 0.080 Inch Diameter Pair: 2 Insulated Conductors Twisted Together Drain Wire: 20 AWG 7/28 Tin Plated Copper, 0.038 Inch Diameter Pair Shield: Foil-Free Edge Aluminum/Polyester Tape, Aluminum Side Facing In, 25% Overlap			
<b>Final Assembly</b> Core: Fibrillated Polypropylene Filler Layer 1: 5 Pairs (#1-5) Cabled Around Core Inner Shield: Aluminum/Polyester Tape, Aluminum Side Facing Out, 25% Overlap Outer Shield: 34 AWG Tin Plated Copper Braid, 85% Coverage Jacket: 0.032 Inches of XPbT, Color - Black Diameter: 0.475 Inches Nominal Print Legend (White Ink): "MADISON CABLE AWM STYLE 2464 80°C 300V VW-1 RoHS COMPLIANT"			
COLOR CODE			
Pair #	Conductor #1	Conductor #2	
1	Black	Red	
2	Black	White	
3	Black	Green	
4	Black	Blue	
5	Black	Yellow	
		REVISION HISTORY	
		1	03/29/06
Spec Number: 101-4598 Part Number: 10WJOLF001		Prepared By: D.M. Card Reviewed By: B. Harvie	
Customer: Customer #:		B. Morissette	Page 1 of 1