


Super Vu-Tron® Type G and Type G-GC Round

90°C (UL), 2000 Volt Portable Power Cable

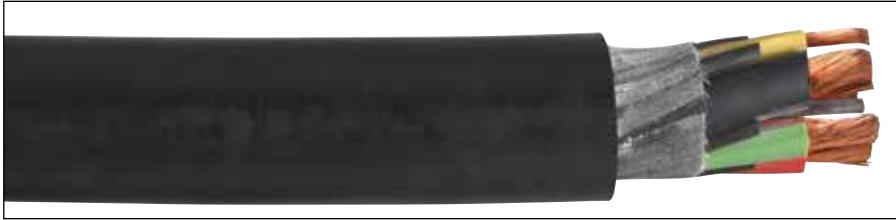

Product Construction:

Conductor:

- 8 AWG through 500 kcmil fully annealed stranded bare copper

Insulation:

- Premium-grade, color-coded 90°C EPDM
- Color code: See chart below
- Insulated grounds and ground checks

Jacket:

- Super Vu-Tron® 90°C, black
- Temperature range: -40°C to +90°C

Jacket Marking:

- TYPE G-GC (4/0 AND SMALLER) – CAROL SUPER VU-TRON® SIZE (mm²) TYPE G-GC PORTABLE POWER CABLE (UL) 2000 V DRY 90°C WET 75°C SUN RES P-7K-123049-MSHA --- CSA TYPE G-CG (-40°C) 2 KV FT5 MADE IN USA
- TYPE G-GC (LARGER THAN 4/0) - (SIZE) TYPE G-GC CAROL SUPER VU-TRON® 90°C DRY AND WATER RESISTANT 75°C 2000 V SUN RES (UL) P-7K-123049 MSHA LR27161 MADE IN USA
- TYPE G - CAROL SUPER VU-TRON® SIZE (mm²) TYPE G PORTABLE POWER CABLE (UL) 600/2000 V DRY 90°C WET 75°C SUN RES P-7K-123049 MSHA --- CSA TYPE G (-40°C) 2 KV FT5 MADE IN USA

Applications:

- Industrial and light- to medium-duty mining applications
- Heavy-duty service as power supply cable
- Mobile and portable electrical equipment
- 3- and 4-conductor—use on three-phase AC systems where grounding is required

Features:

- Excellent impact and abrasion resistance
- Withstands exposure to oil, acids, alkalies, heat, moisture and most chemicals
- Suitable for immersion in water*
- Indent-printed for easy identification
- Rope lay stranding for maximum flex life
- Cable core bound for superior flexibility and toughness
- Non-wicking rubber fillers (G-GC)
- Canadian color code available upon request
- Sunlight-resistant

Industry Approvals:

- UL Type G, G-GC
- CSA
- MSHA Approved
- RoHS Compliant

Packaging:

- Lengths cut to order

* Suitable for immersion in water if properly sealed and terminated.

3 CONDUCTOR - TYPE G-GC - 2000 VOLT

CATALOG NUMBER	NO. OF COND.	AWG OR kcmil	COND. STRAND	NOMINAL COND. O.D.		YELLOW GROUND CHECK AWG SIZE	GREEN GROUND COND. AWG SIZE	NOMINAL INS. THICKNESS		NOMINAL O.D.		CURR. AMPS ⁽¹⁾	APPROX. NET WT. LBS/M ⁽⁵⁾
				INCHES	mm			INCHES	mm	INCHES	mm		
82313	3	8	133	0.160	4.06	10	2#10	0.060	1.52	0.965	24.51	65	600
82623	3	6	259	0.198	5.03	10	2#10	0.060	1.52	1.025	26.04	87	770
82643	3	4	259	0.245	6.22	10	2#8	0.060	1.52	1.130	28.70	114	1015
82663	3	2	259	0.297	7.54	8	2#7	0.080	2.03	1.345	34.16	152	1480
82373	3	1	259	0.353	8.97	8	2#6	0.080	2.03	1.455	36.96	177	1795
82383	3	1/0	259	0.385	9.78	8	2#5	0.080	2.03	1.585	40.26	205	2245
82393	3	2/0	259	0.442	11.23	8	2#4	0.080	2.03	1.675	42.55	237	2570
82403	3	3/0	259	0.480	12.19	8	2#3	0.080	2.03	1.810	45.97	274	3230
82413	3	4/0	259	0.555	14.10	8	2#2	0.080	2.03	1.950	49.53	316	3700
82423 ^{(2)*}	3	250	627	0.615	15.62	8	2#2	0.095	2.41	2.390	60.71	352	6060
82443 ^{(2)*}	3	350	855	0.725	18.42	8	2#1/0	0.095	2.41	2.680	68.07	433	7400
82473 ^{(2)*}	3	500	1235	0.880	22.35	8	2#2/0	0.095	2.41	3.030	76.96	536	10100

4 CONDUCTOR - TYPE G - 600/2000 VOLT

CATALOG NUMBER	NO. OF COND.	AWG OR kcmil	COND. STRAND	NOMINAL COND. O.D.		GREEN COND. AWG SIZE	NOMINAL INS. THICKNESS		NOMINAL O.D.		CURRENT AMPS ⁽¹⁾	APPROX. NET WT. LBS/M ⁽⁵⁾
				INCHES	mm		INCHES	mm	INCHES	mm		
82314	4	8	133	0.160	4.06	4#12	0.060	1.52	1.045	26.54	52	690
82624	4	6	259	0.198	5.03	4#12	0.060	1.52	1.125	28.58	70	880
82644	4	4	259	0.245	6.22	4#10	0.060	1.52	1.225	31.12	91	1160
82664	4	2	259	0.297	7.54	4#9	0.080	2.03	1.435	36.45	122	1720
82374*	4	1	259	0.353	8.97	4#8	0.080	2.03	1.590	40.39	142	2200
82384	4	1/0	259	0.385	9.78	4#7	0.080	2.03	1.730	43.94	164	2705
82394	4	2/0	259	0.442	11.23	4#6	0.080	2.03	1.855	47.12	190	3190
82404	4	3/0	259	0.480	12.19	4#5	0.080	2.03	2.040	51.82	219	4005
82414	4	4/0	259	0.555	14.10	4#4	0.080	2.03	2.145	54.48	253	4560

⁽¹⁾ Ampacities based on 90°C conductor and 30°C ambient temperature per Table 400.5(A)(2) of the National Electrical Code®.

⁽²⁾ UL Listed and CSA Certified.

* Non-stock item; minimum quantity purchase required.

⁽⁵⁾ Actual shipping weight may vary.

COLOR CODE CHART

NO. OF CONDUCTORS	COLOR
3	Black, White, Red
4	Black, White, Red, Orange

