

# PRODUCT SPECIFICATION

Parent Number: 10 19/23 TC GPT MARINE

Description: 10 19/23 TC GPT Marine per SAE J1128/J378

Stranding: 19/23 TC LHL

Style: GPT Marine per SAE J378/J1128

Insulation: PVC

Print Legend: GPT 10GA MARINE WIRE SAE J378 AND J1128 60V DC 105C DRY

Voltage: Per SAE J 1128 this product is intended for use at a nominal system voltage of 60 Volts DC or less in surface vehicle electrical systems.

Temperature: 105C

Notes:

This product complies with European Directives 2011/65/EU & 2015/863 (RoHS 2&3).

The information presented here is, to the best of our knowledge, true and accurate. Since conditions of use are beyond Southwire's control all product data presented is for informational purposes only and does not create a binding obligation or liability on Southwire or confer any rights on any customer. The sale of product(s) is conditioned upon acceptance of a purchase order subject to Southwire's standard terms and conditions contained therein, including without limitation Southwire's standard warranty. Southwire disclaims all liability in connection with the use of information contained herein or otherwise.

This specification is proprietary intellectual property of Southwire Company, LLC. Any information contained herein shall not be disclosed to any party without written consent of Southwire Company, LLC.


Customer Approval:

Customer Part Nbr(s): GPTM10T-5-P

Approved By: *John Miller* Date: 8-13-19

Title: *Wiring Specialist* Company Name: FEWA

DATE	REV	ECN	DESCRIPTION
2/17/2004	A	4135	SPECIFICATION CREATED

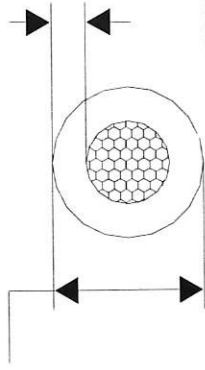

DIAMETER: 0.177

TOLERANCE ± : 0.003

NOM WALL: 0.031

MINIMUM WALL: 0.022



# Copperfield®

1115 W. North Street  
Bremen, IN 46506

Phone: 1-574-546-5115