

16 AWG Single Conductor Waterblocked

Revisions		
Rev.	Description	Date
B	Added Reach & RoHS Statements	10/30/09

Conductor: 16 AWG 19/29 Tinned Copper
with silicone blocking agent

Insulation: Premium Grade 105°C PVC


Thickness: .021"


Diameter: .097" Nominal O.D.

Print:
TYPE GPT-M SAE-J-1128 MARINE -40C to +105C 50V
16 AWG WET ANTI-CAPILLARY WIRE or E174416
TYPE AWM 300V 105C

Other: Marine Engine and Automotive Component
wire for use in SAE J -1128 and J-378C
Applications at 105°C for marine use.

Available in solid colors and stripes
Recognized for marine use by the NMMA,
ABYC and Coast Guard.

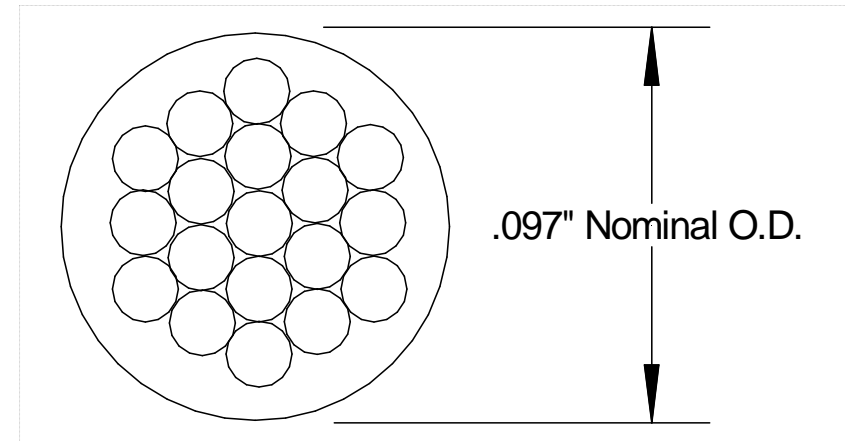

	Hueson Corp.		
	Product Specification		
	Drawn by: <i>Brian Harlan</i>	Product Description: 16 AWG Waterblocked	
	Date: 03/07/2013	Drawing No.	Rev: B