



NORTHWIRE RESTRICTED

This document contains Northwire, Inc. proprietary data, and is not to be copied, reproduced, used or divulged to unauthorized persons, in whole or in part, without proper authorization in writing from Northwire, Inc. This information is the property of Northwire, Inc. which reserves all rights to it.

DESC: 20/5 CABLE 105°C 300V

DWG NO: 2005C011


SCALE: .20x DATE: 6/14/05 DR. BY: DP LANGER

NWI NO: FCAB205-009

CUSTOMER: INDUSTRIAL ELECTRIC CUSTOMER P/N: TRC2005G-0-019UX

ITEM SPECS.

- A. 20 GAUGE GXL CONDUCTORS
GROSS LINKED POLYETHYLENE INSULATION
7x28BC .085 AVERAGE O.D.
CONDUCTORS SUPPLIED BY IEWC
- B. POLY FILLER
- C. 30 MILS PRESSURED PVC JACKET 105°C 300V
24 MILS MIN. PVC JACKET BLACK JACKET
CABLE IS NOT UL OR CSA APPROVED

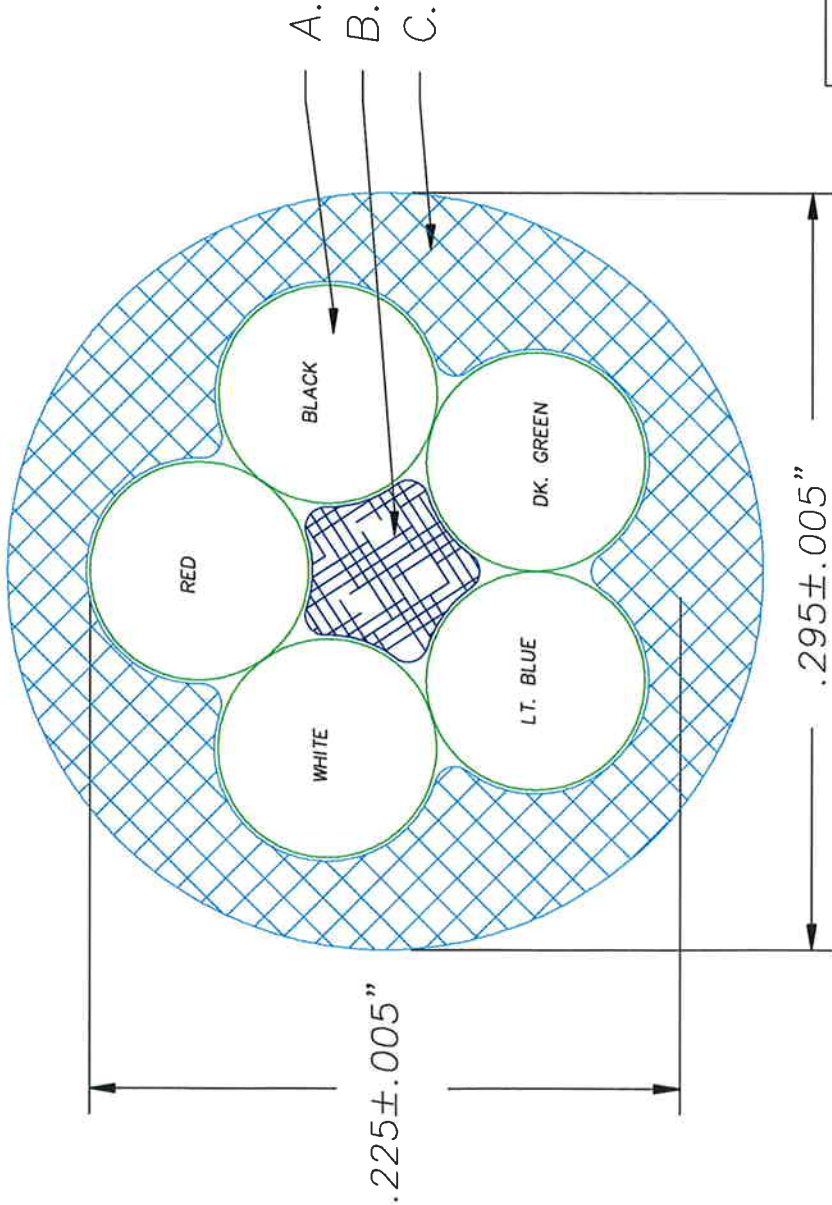

ELECTRICAL REQUIREMENTS:
NONE SPECIFIED

MECHANICAL REQUIREMENTS:
NONE SPECIFIED

Bruce S. Zuti 07/28/05

ADDED NWI AND CUSTOMER P/N'S	C	7/22/05	DPL
ADDED STRANDING; ADDED COND. COLORS	B	6/20/05	DPL
INITIAL RELEASE	A	6/14/05	DPL
REVISION RECORD		REV DATE	APPROVAL