

# Command® Series Home Entertainment Speaker Cable

## NEC Type CL3, CSA, CMG, AWM I/II A/B

**Product Construction:**

**Conductor:**

- 12, 14, 16, or 18 AWG fully annealed, stranded bare copper per ASTM B-8

**Insulation:**

- Premium-grade, color coded polypropylene
- Color code: see chart below

**Jacket:**

- PVC, command blue
- Temperature range: -20°C to +60°C

**Applications:**

- Digital audio
- Stereo Systems
- In-wall speakers
- Home theatre
- Remote control circuits
- Security Systems
- Bi-amp speakers

**Features:**


- Flexible

**Compliances:**

- NEC Article 725 Type CL3 (UL: 60°C)
- CSA, CMG, AWM, I/II A/B
- RoHS Compliant Directive 2002/95/EC
- Designed to meet UL 70,000 BTU Vertical Tray Flame Test
- Passes CSA FT-4 Vertical Flame Test

**Packaging:**

- Please contact Customer Service for packaging and color options

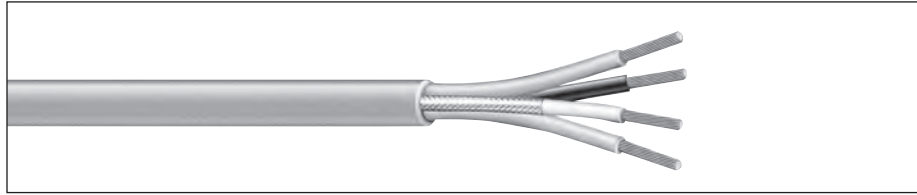

| CATALOG NUMBER | NO. OF COND. | AWG SIZE | COND. STRAND | NOM. INSULATION WALL |      | NOM. JACKET THICKNESS |      | NOMINAL O.D. |      |
|----------------|--------------|----------|--------------|----------------------|------|-----------------------|------|--------------|------|
|                |              |          |              | in                   | mm   | in                    | mm   | in           | mm   |
| <b>C1700†</b>  | 2            | 12       | 65/30        | 0.009                | 0.15 | 0.021                 | 0.53 | 0.254        | 6.45 |
| <b>C1701†</b>  | 4            | 12       | 65/30        | 0.009                | 0.15 | 0.021                 | 0.53 | 0.299        | 7.59 |
| <b>C1702†</b>  | 2            | 14       | 41/30        | 0.009                | 0.15 | 0.021                 | 0.53 | 0.220        | 5.59 |
| <b>C1703†</b>  | 4            | 14       | 41/30        | 0.009                | 0.15 | 0.021                 | 0.53 | 0.257        | 6.53 |
| <b>C1704</b>   | 2            | 16       | 26/30        | 0.009                | 0.15 | 0.021                 | 0.53 | 0.191        | 4.85 |
| <b>C1705</b>   | 4            | 16       | 26/30        | 0.009                | 0.15 | 0.021                 | 0.53 | 0.222        | 5.64 |

†CL3, CSA AWM I/II A/B only

**Color Code Chart**

| NO. OF COND. | COLOR |
|--------------|-------|
| 1            | Black |
| 2            | Red   |
| 3            | White |
| 4            | Green |