


Multi-Conductor, Rubber, Unshielded

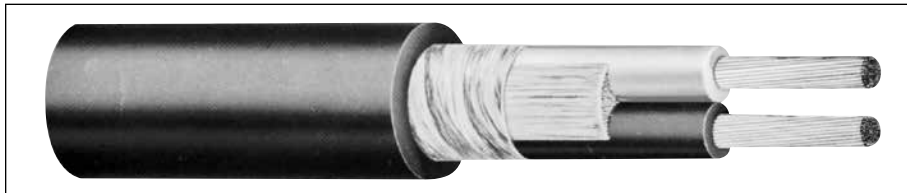

Product Construction:

Conductor:

- 20 AWG fully annealed stranded tinned copper per ASTM B33

Insulation:

- Premium-grade, color-coded rubber
- Color code: See chart below

Jacket:

- Rubber, black
- Temperature range: -20°C to +60°C

Applications:

- Energy management systems
- Control circuits
- Fire alarm control
- Broadcast and studio requirements
- Suggested voltage rating: 350 volts

Features:

- Excellent impact resistance
- High level of abrasion resistance
- High flexibility
- Excellent mechanical strength
- Excellent moisture resistance

Compliances:

- RoHS Compliant Directive 2011/65/EU

Packaging:

- Please contact Customer Service for packaging and color options

| CATALOG NUMBER | NO. OF COND. | AWG SIZE | COND. STRAND | NOM. INSULATION THICKNESS | | NOM. JACKET THICKNESS | | NOMINAL O.D. | |
|----------------|--------------|----------|--------------|---------------------------|------|-----------------------|------|--------------|-------|
| | | | | INCHES | mm | INCHES | mm | INCHES | mm |
| C3602 | 2 | 20 | 26/34 | 0.020 | 0.51 | 0.035 | 0.89 | 0.016 | 0.406 |
| C3603 | 3 | 20 | 26/34 | 0.020 | 0.51 | 0.035 | 0.89 | 0.016 | 0.406 |
| C3604 | 4 | 20 | 26/34 | 0.020 | 0.51 | 0.035 | 0.89 | 0.016 | 0.406 |
| C3605 | 5 | 20 | 26/34 | 0.020 | 0.51 | 0.035 | 0.89 | 0.016 | 0.406 |
| C3606 | 6 | 20 | 26/34 | 0.020 | 0.51 | 0.035 | 0.89 | 0.016 | 0.406 |
| C3607 | 7 | 20 | 26/34 | 0.020 | 0.51 | 0.035 | 0.89 | 0.016 | 0.406 |
| C3608 | 8 | 20 | 26/34 | 0.020 | 0.51 | 0.035 | 0.89 | 0.016 | 0.406 |
| C3610 | 10 | 20 | 26/34 | 0.020 | 0.51 | 0.035 | 0.89 | 0.016 | 0.406 |

Data subject to change.

Color Code Chart

| NO. OF COND. | COLOR |
|--------------|-------------|
| 1 | Black |
| 2 | White |
| 3 | Red |
| 4 | Green |
| 5 | Orange |
| 6 | Blue |
| 7 | Yellow |
| 8 | Brown |
| 9 | White/Black |
| 10 | Red/Black |