
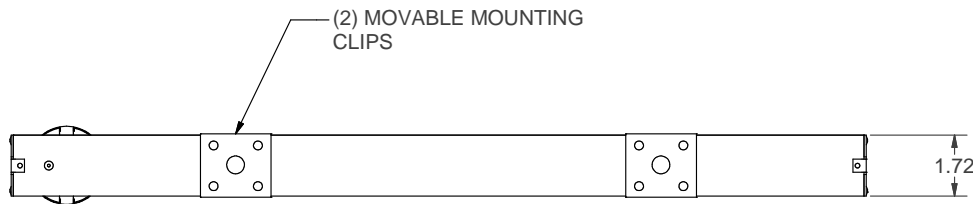
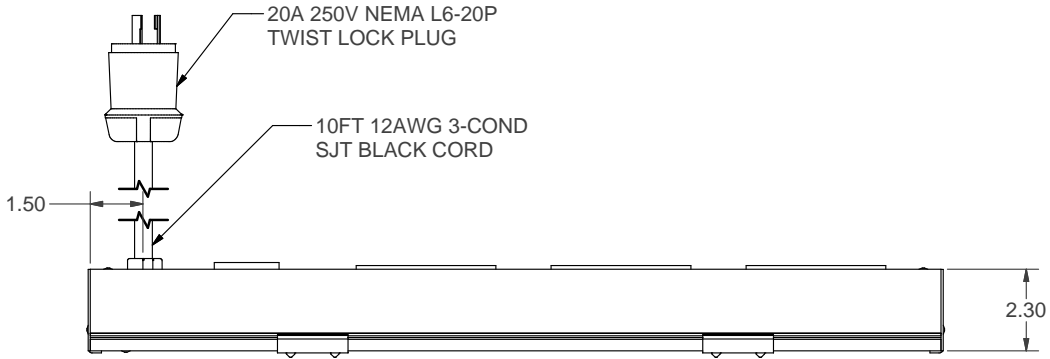


YOU ARE HEREBY NOTIFIED THAT ANY DISSEMINATION, DISCLOSURE, COPYING OR DISTRIBUTION OF THE IDEAS, INFORMATION OR DESIGNS THEREIN SHOWN WITHOUT OUR WRITTEN PERMISSION IS STRICTLY PROHIBITED.

CUSTOMER APPROVAL:

Customer name:
Customer signature:
Company name:
Contact number:
Date:

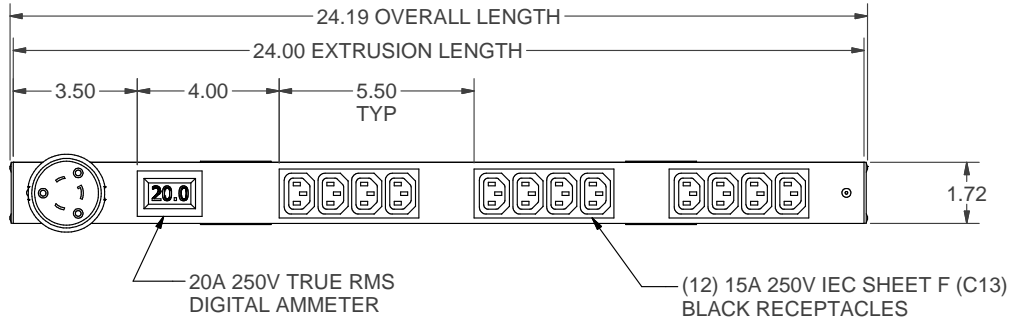

NOTES:

- ALL DIMENSIONS ARE IN INCHES W/ +/-0.06" TOLERANCE UNLESS OTHER WISE SPECIFIED.
- THIS PDU MUST BE PLUGGED INTO A CIRCUIT THAT HAS OVERCURRENT PROTECTIVE DEVICE RATED AT NO MORE THAN 125% OF MAXIMUM CURRENT DRAW.

INPUT:

20A 250V 60HZ NEMA L6-20P
MAXIMUM CURRENT DRAW = 16A


OUTPUT:

(12) 15A 250V IEC SHEET F (C13)
MAXIMUM LOAD = 4000VA (16A @ 250V)


	CERTIFIED TO CAN/CSA STD C22.2 NO. 60950-1-03 CONFORMS TO UL STD 60950-1	
	MAXIMUM TOTAL LOAD = 4000VA (16A @ 250V)	
DESCRIPTION: 24" 0U VERTICAL MOUNT PDU		
POWER: 20A 250V 60HZ		
FINISH: TEXT BLACK MATERIAL: Aluminum		
	Hubbell Canada LP 870 Brock Road South Pickering, Ontario L1W 1Z8	
	CAT No: H1V2410L4N12KM	
DRWN BY: SR	PROJT NO:	
APR'D BY: RC	DRAWING NO: A14442	
DATE: 11/20/2009	SHEET: 1 of 1	SCALE: NTS

YOU ARE HEREBY NOTIFIED THAT ANY DISSEMINATION, DISCLOSURE, COPYING OR DISTRIBUTION OF THE IDEAS, INFORMATION OR DESIGNS THEREIN SHOWN WITHOUT OUR WRITTEN PERMISSION IS STRICTLY PROHIBITED.

CUSTOMER APPROVAL:

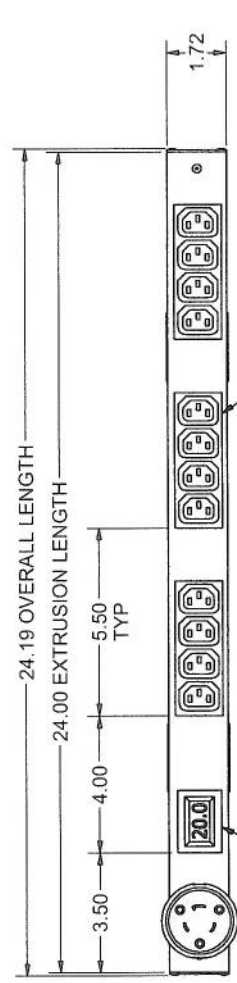


20A 250V TRUE RMS DIGITAL AMMETER
 (12) 15A 250V IEC SHEET F (C13) BLACK RECEPTACLES

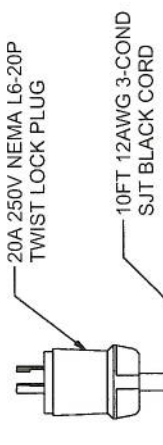

20A 250V NEMA L6-20P TWIST LOCK PLUG
 10FT 12AWG 3-COND SJT BLACK CORD

APPROVED
 OCT 23 2013
 W. Scrivens

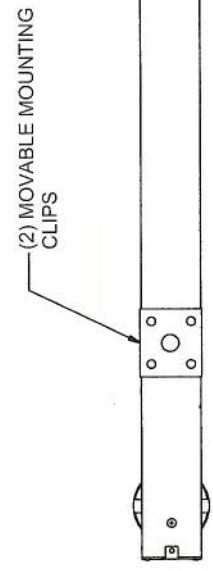

(2) MOVABLE MOUNTING CLIPS

Customer name:	WAYNE SCRIVENS
Customer signature:	<i>[Signature]</i>
Company name:	BUE ANT MEDIA
Contact number:	416-200-4356
Date:	OCT 23 / 2013

NOTES:

- ALL DIMENSIONS ARE IN INCHES W/ +/-0.06" TOLERANCE UNLESS OTHERWISE SPECIFIED.
- THIS PDU MUST BE PLUGGED INTO A CIRCUIT THAT HAS OVERCURRENT PROTECTIVE DEVICE RATED AT NO MORE THAN 125% OF MAXIMUM CURRENT DRAW.

INPUT:

20A 250V 60HZ NEMA L6-20P
 MAXIMUM CURRENT DRAW = 16A

OUTPUT:

(12) 15A 250V IEC SHEET F (C13)
 MAXIMUM LOAD = 4000VA (16A @ 250V)



CERTIFIED TO CAN/CSA
 STD C22.2 NO. 60950-1-03
 CONFORMS TO UL
 STD 60950-1

MAXIMUM TOTAL LOAD = 4000VA (16A @ 250V)

DESCRIPTION: 24" 0U VERTICAL MOUNT PDU

POWER: 20A 250V 60HZ

FINISH: TEXT BLACK MATERIAL: Aluminum



Hubbell Canada LP
 870 Brock Road South
 Pickering, Ontario
 L1W 1Z8

CAT No: H1V2410L4N12KM

DRWN BY: SR PROJ NO:

APRD BY: RC DRAWING NO: A14442

DATE: 11/20/2009 SHEET: 1 of 1 SCALE: NTS