
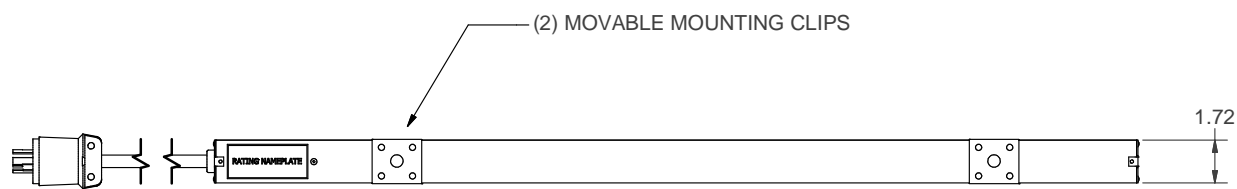
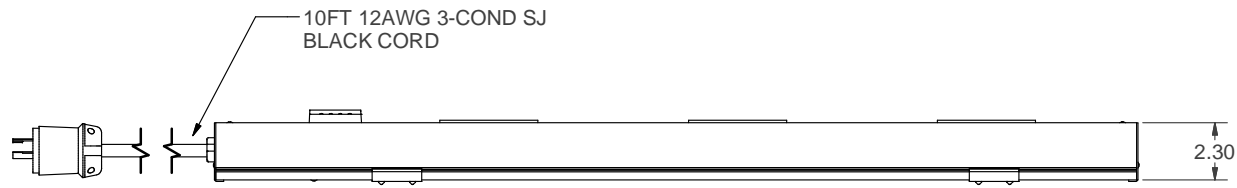


CUSTOM PRODUCT

YOU ARE HEREBY NOTIFIED THAT ANY DISSEMINATION, DISCLOSURE, COPYING OR DISTRIBUTION OF THE IDEAS, INFORMATION OR DESIGNS THEREIN SHOWN WITHOUT OUR WRITTEN PERMISSION IS STRICTLY PROHIBITED.

CUSTOMER APPROVAL: AS IS WITH NOTED CHANGES

Customer name:
Customer signature:
Company name:
Contact number:
Date:
Custom Products Are Non-Cancellable & Non-Returnable

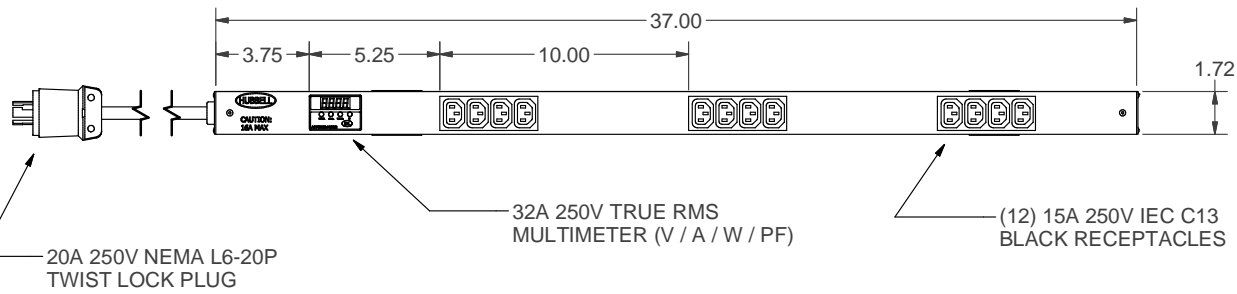

- NOTES:**
1. ALL DIMENSIONS ARE IN INCHES WITH +/-0.06" TOLERANCE UNLESS OTHERWISE SPECIFIED.
 2. THIS PDU MUST BE PLUGGED INTO A CIRCUIT THAT HAS OVER-CURRENT PROTECTIVE DEVICE RATED AT NO MORE THAN 125% OF MAXIMUM CURRENT DRAW.

INPUT:
 20A 250V 60Hz - NEMA L6-20P
 MAXIMUM CURRENT DRAW = 16A

OUTPUT:
 (12) 15A 250V IEC C13
 MAX TOTAL LOAD = 4000VA (16A @ 250V)

ETL REF No. H1V3710L4N12KM

	CERTIFIED TO CAN/CSA STD C22.2 NO. 60950-1-03 CONFORMS TO UL STD 60950-1
	MAXIMUM TOTAL LOAD = 4000VA (16A @ 250VAC)
DESCRIPTION: 37" H1V, L6-20P, (12) C13, 10FT 12/3SJ CORD, METER	
POWER: 20A 250V NEMA L6-20P 60Hz	
FINISH: TEXTURED BLACK MATERIAL: ALUMINUM	
	Hubbell Canada LP 870 Brock Road South Pickering Ontario

CAT No: H1V3710L4N12A17958	
DRWN BY: SR	PROJ'T NO:
APR'D BY: RC	DRAWING NO: A17958
DATE: 06/29/2015	SHEET: 1 of 1 SCALE: NTS



6 5 4 3 2 1