


# Custom Product

YOU ARE HEREBY NOTIFIED THAT ANY DISSEMINATION, DISCLOSURE, COPYING OR DISTRIBUTION OF THE IDEAS, INFORMATION OR DESIGNS THEREIN SHOWN WITHOUT OUR WRITTEN PERMISSION IS STRICTLY PROHIBITED.

**CUSTOMER APPROVAL:**  AS IS  WITH NOTED CHANGES

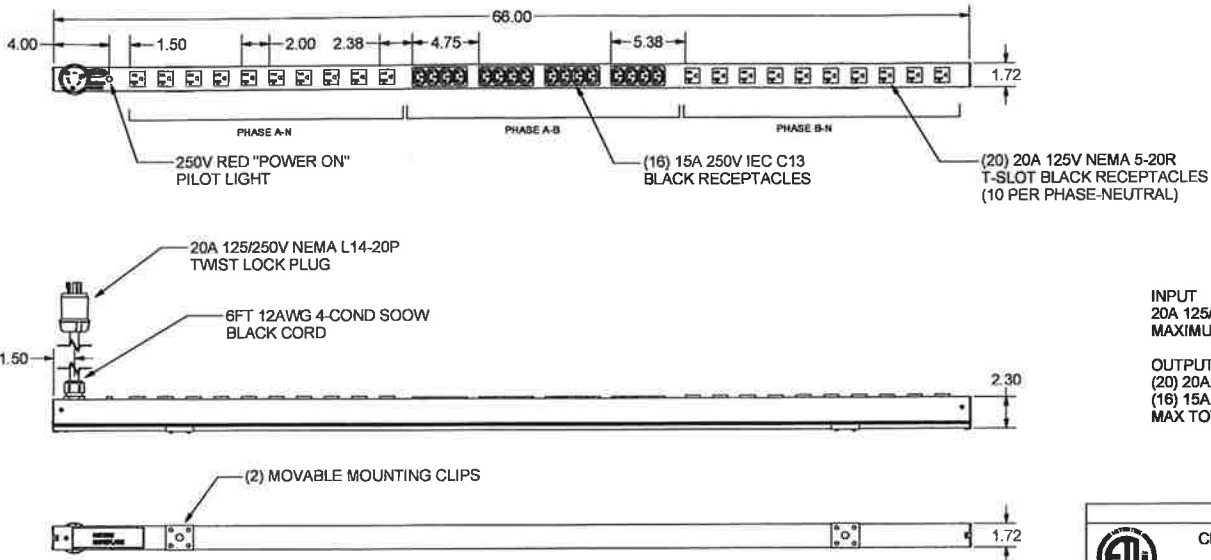

**INPUT**  
 20A 125/250V 60HZ NEMA L14-20P  
 MAXIMUM CURRENT DRAW = 16A

**OUTPUT**  
 (20) 20A 125V NEMA 5-20R  
 (16) 15A 125V IEC C13  
 MAX TOTAL LOAD = 4000VA (16A @ 250V)

Customer name:
Customer signature:
Company name:
Contact number:
Date:
Custom Products Are Non-Cancellable & Non-Returnable

**NOTES:**

1. ALL DIMENSIONS ARE IN INCHES W/ +/-0.06" TOLERANCE UNLESS OTHERWISE SPECIFIED.
2. THIS PDU MUST BE PLUGGED INTO A CIRCUIT THAT HAS OVERCURRENT PROTECTIVE DEVICE RATED AT NO MORE THAN 125% OF MAXIMUM CURRENT DRAW.

	CERTIFIED TO CAN/CSA STD C22.2 NO. 60950-1-03 CONFORMS TO UL STD 60950-1
	MAXIMUM TOTAL LOAD = 4000VA (16A @ 250V)
DESCRIPTION: 6" HV, 8" T 12A SOOW, L14-20P, (20) 5-20R, (16) C13, PILOT LIGHT	
POWER: 20A 125/250V 60Hz NEMA L14-20P	
FINISH: TEXT BLACK	MATERIAL: Aluminum
	Hubbell Canada LP 870 Brock Road South Pickering Ontario
CAT No: H1V6606L8N36A16616	
DRWN BY: SR	PROJ NO:
APRD BY: RC	DRAWING NO: A16616
DATE: 04/05/2013	REV SHEET: 1 of 1 SCALE: NTS