



Heat shrinkable tubing 6:1 - 1.2 m lengths

HA67 - thick wall adhesive lined

Insulates, seals and protects large size differences between connectors and cables.

Features and benefits


- High shrink ratio, heavy-duty heat shrinkable tubing
- Thermoplastic adhesive-lined tubing
- Conforms well to highly variable substrate dimensions
- Simplifies cable repair
- Passes over large connectors and shrinks onto much smaller cable jackets
- Environmental sealing and excellent insulation
- Resistant to impact and abrasion



Due to the high shrink ratio HA67 is suitable for complex shapes and dimensions.



One Step to the Web!

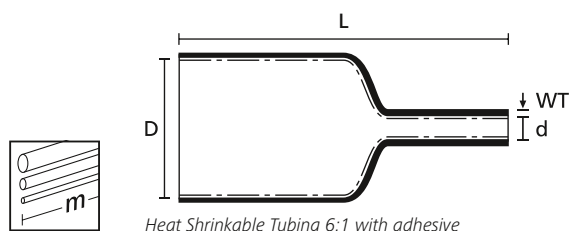

MATERIAL	Polyolefin, cross-linked (PO-X)
Shrink Ratio	6:1
Operating Temperature	-55 °C to +110 °C
Min. Shrink Temperature	+120 °C
Softening Point Adhesive	+85 °C
Longitudinal change after shrinkage	-10 % max.
Dielectric Strength	20 kV/mm according to IEC 243
Flammability	not flame retarded



TYPE	Supplied Ø D min.	Recov. Ø d max.	Wall (WT)	Length (L)	Colour	Tools	Article-No.
HA67-19.0/3.2	19.0	3.2	3.20	1,220.0	Black (BK)	30-32	321-30000
HA67-33.0/5.5	33.0	5.5	3.40	1,220.0	Black (BK)	30-32	321-30100
HA67-44.4/7.4	44.4	7.4	3.60	1,220.0	Black (BK)	-	321-30200
HA67-50.8/8.3	50.8	8.3	4.80	1,220.0	Black (BK)	-	321-30300
HA67-69.8/11.7	69.8	11.7	4.80	1,220.0	Black (BK)	-	321-30400
HA67-88.9/17.1	88.9	17.1	4.80	1,220.0	Black (BK)	-	321-30500
HA67-119.4/22.9	119.4	22.9	4.80	1,220.0	Black (BK)	-	321-30600
HA67-235.0/40.0	235.0	40.0	4.80	1,000.0	Black (BK)	-	321-30701

All dimensions in mm. Subject to technical changes.
Minimum Order Quantity (MOQ) may differ from package content.

Recommended Tools			
	30	31	32
	H5002	H5004	E4500
	568	568	567

For more information on toolings please refer to the Application Tooling chapter.