


3X CONDUCTOR  
20 AWG 19/32 STRANDED  
NICKEL COATED COPPER  
TEFLON (PTFE) EXTRUDED INSULATION .011 NOM THICKNESS  
.068 NOMINAL DIAMETER  
COLOR: 1X WHITE  
1X RED  
1X RED

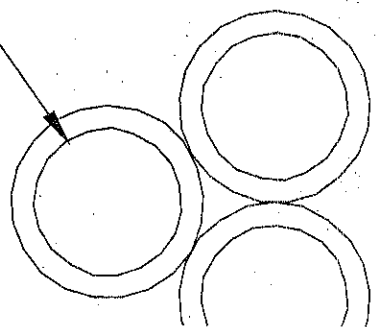

UNCONTROLLED COPY - VERIFY REVISION BEFORE USE (Copia no controlada - verificar revision antes de usar)

NOTES:

- 1.) CABLE TO MEET UL, CSA, AND CE CERT. IDENTIFICATION TO BE MARKED ON SPO. CABLE HAS NO OUTER JACKET.
- 2.) CABLE SHALL BE SPOOLED WITH INCREM LENGTHS NOT SHORTER THAN 50 FEET.

UNLESS OTHERWISE SPECIFIED:  
DIMENSION ARE IN INCHES.  
TOLERANCES ARE:  
DECIMALS: ±.010  
FRACTIONS: ±1/32  
ANGLES: ±2°  
ALL DIAMETERS:  $\varnothing$  .010  
BREAK EDGES: .005-.020  
FILLETS TO BE: .005-.020

APPROVALS		DATE
DRAWN BY: JAV		01-19-12
CHECKED BY: JAV		01-19-12
DE: AJH		03-07-12

