

TWIST-LOCK® Devices

2 Pole, 3 Wire Grounding

20 Ampere, 125, 250 Volts and 277 Volts AC

VALISE® Plugs and Connector Bodies



IP20
SUITABILITY



NEMA L5-20P
20A 125V
UL/CSA
1 HP




NEMA L6-20P
20A 250V
UL/CSA
2 HP



NEMA L7-20P
20A 277V AC
UL/CSA
2 HP

Valise Plugs

Description	Cord Dia.	Catalog Numbers		
Yellow nylon.	.325"-.720" (8.26-18.3)	HBL2311VY	HBL2321VY	HBL2331VY
Corrosion resistant, yellow nylon.	.325"-.720" (8.26-18.3)	HBL23CM11V	-	-
Black nylon.	.325"-.720" (8.26-18.3)	HBL2311VBK	HBL2321VBK	HBL2331VBK



HBL2311VY



NEMA L5-20R
20A 125V
UL/CSA




NEMA L6-20R
20A 250V
UL/CSA



NEMA L7-20R
20A 277V AC
UL/CSA

Valise Connector Bodies

Description	Cord Dia.	Catalog Numbers		
Yellow nylon.	.325"-.720" (8.26-18.3)	HBL2313VY	HBL2323VY	-
Black nylon.	.325"-.720" (8.26-18.3)	HBL2313VBK	HBL2323VBK	HBL2333VBK

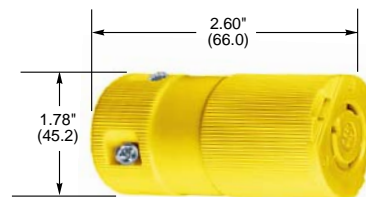

HBL2313VY

Notes: Connector bodies are not HP rated.
HP ratings are AC only.
See page B-88 for technical information.

Weatherproof Accessories IP55** SUITABILITY

Description	Catalog Numbers
Yellow Seal-Tite® elastomer triple seal cover for use with Valise plugs when used in cord set and Valise connector bodies when used with flanged inlet.	HBL60CM31V*
Yellow Seal-Tite elastomer triple seal cover for use with Valise connector bodies.	HBL60CM32V*

Note: **When installed and used properly with plug and connector body combinations.

* Not UL Listed, CSA Certified



HBL60CM31V



HBL60CM32V