



Hot Melt Tape for Heat Shrinkable Tubing and Shapes

- HMT200A

Designed for use with heat shrink sleeving and mouldings.

Application Method

1. Clean and preheat the part to be protected.
2. Wrap the tape around the part and overlap.
3. Put the tubing or heat shrinkable shape over the tape and shrink down.

Features and Benefits

- Hot melt tape flows when heated to seal against moisture
- For heat shrink tubing and mouldings




HMT200A-tape.



Adhesive tape HMT200A for sealing against humidity.

MATERIAL	Ethylenevinylacetate (EVA)
Operating Temperature	-55 °C to +105 °C
Melting Point	Starting from +95 °C
Specifications	DEF Stan 59-97 Type W (w)

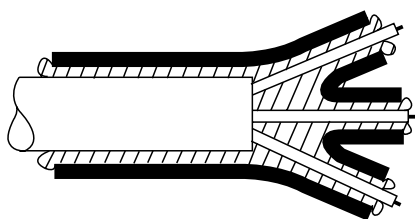

HMT200A

TYPE	Thickness (T)	Width (W)	Colour	Reel Length	Article-No.
HMT200A	0.25	25.0	Translucent (TT)	10 m	354-02260
	0.25	25.0	Translucent (TT)	50 m	354-02259

All dimensions in mm. Subject to technical changes.
Minimum Order Quantity (MOQ) may differ from package content.



Please note! Not all products listed on this page may have this approval.
For product specific approvals please refer to the Appendix.