

# Bundling and Securing

## Clamps

### Ratchet P-Clamps

#### Size A - For bundle diameters from ¼" to ½" (6.2 mm to 13.7 mm)


The Ratchet P-Clamp family offers versatility when managing wires, cables and hoses. The robust design and durable materials make it ideal for heavy duty applications, both indoors and out. The one-piece adjustable clamp can be closed by hand to the desired diameter. The release feature provides easy and nondestructive removal of cables simply by using a flat-head screwdriver. This nondestructive release allows the clamp to be reused without removing or replacing any bolts or screws. The Ratchet P-Clamp is offered in four sizes and multiple mounting configurations.

#### Features and Benefits

- One-piece ratchet closure allows for easy installation during pre- or final assembly.
- Easy release feature simplifies quick adjustments and maintenance.
- Impact modified, heat and UV stabilized PA66 provides long-term durability, indoors and out.
- Zinc-plated steel mounting plate tolerates high torque and is treated to resist chemicals and salt spray.
- Straight, 180° mounting plate is ideal for applications requiring a flush mount set off from the mounting hole.



<b>MATERIAL</b>	Polyamide 6.6 high impact modified, heat and UV stabilized (PA66HIRHSUV), Steel (ST), Zinc plated (ZN)
<b>Operating Temperature</b>	-40°F to +257°F (-40°C to +125°C)
<b>Flammability</b>	UL 94 HB
<b>Color</b>	Black (BK)

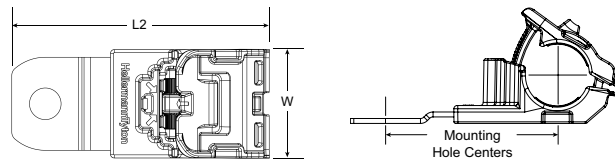

PART NO.	TYPE	Angle/Length	Length (L2) in. (mm)	Width (W) in. (mm)	Min. Tensile Strength lbs. (N)	Mounting Hole Centers in. (mm)	Mounting Hole Dia. in. (mm)	Pkg. Qty.	Drawing
151-01670*	RCA180SM6	180 ° Short	3.3 (83.1)	1.4 (34.9)	100.0 (445.0)	2.0 (50.5)	0.26 (6.5)	5	
151-03035*		180 ° Short	3.3 (83.1)	1.4 (34.9)	100.0 (445.0)	2.0 (50.5)	0.26 (6.5)	30	
151-01637*		180 ° Short	3.3 (83.1)	1.4 (34.9)	100.0 (445.0)	2.0 (50.5)	0.26 (6.5)	300	
151-03036*	RCA180SM8	180 ° Short	3.3 (83.1)	1.4 (34.9)	100.0 (445.0)	2.0 (50.5)	0.33 (8.3)	30	
151-01416*		180 ° Short	3.3 (83.1)	1.4 (34.9)	100.0 (445.0)	2.0 (50.5)	0.33 (8.3)	300	
151-01417*	RCA180SM10	180 ° Short	3.3 (83.1)	1.4 (34.9)	100.0 (445.0)	2.0 (50.5)	0.41 (10.3)	300	
151-01418*	RCA180SM12	180 ° Short	3.3 (83.1)	1.4 (34.9)	100.0 (445.0)	2.0 (50.5)	0.51 (13.0)	300	
151-01638*	RCA180MM6	180 ° Medium	4.1 (105.1)	1.4 (34.9)	100.0 (445.0)	2.9 (72.5)	0.26 (6.5)	200	

Dimensions are approximate and subject to technical changes. Use Part No. for ordering and Type for specification purposes.  
\*This product meets UL standards.