



**1/C, 15kV Rated, Nonshielded Power Cable**

- A. CONDUCTOR: 350 kcmil 37X Compressed Class B Strand Copper  
 B. CONDUCTOR SCREEN: Extruded Semiconducting (SC-EPR)  
 C. INSULATION: 210 Extruded Ethylene Propylene Rubber OKOGUARD®  
 D. JACKET: 110 Extruded OKOLON TS-CPE® (Thermoset Chlorinated Polyethylene)



Dimensions	Thickness (in.)		Diameter (in.)		Cable Description 115-24-2912
	Nominal	Minimum Point		Nominal	
Conductor	N/A			0.664	1/C 350 37X COPPER -SS- 210 OKOGUARD EPR-110 OKOLON TS-CPE -15KV NON UL NON CSA  <b>TEMPERATURE RATINGS</b> 90°C - Continuous, 130°C - Emergency 250°C - Short Circuit
Cond. Screen	0.020	0.016		0.708	
Insulation	0.210			1.142	
Outer Jacket	0.110			1.378	
	Cable Weight (lbs./M'):		1780		

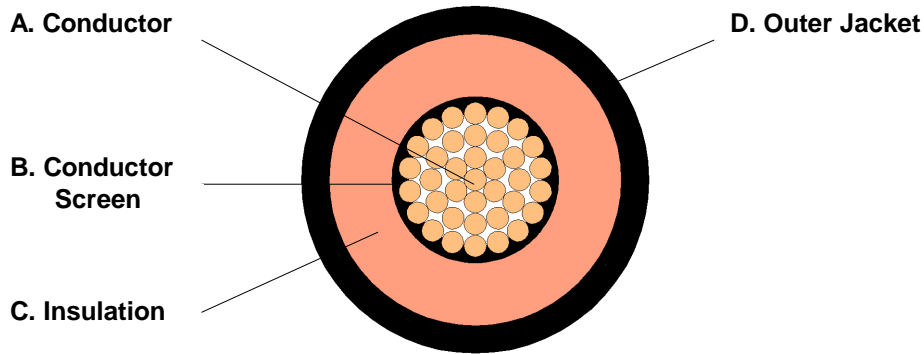

Customer Name: IEWC-CORP

End User: ROCKWELL AUTOMATION CANADA INC

Customer Spec:

Industry Standards: ICEA S-96-659/NEMA WC71. Non-UL, Non-CSA.

APPROVED BY:	<b>Okonite Product Code 115-24-2912</b>				Date: 09/22/17
PREP. BY RWP	SCALE None	INQUIRY NO. 21-60677	ITEM NO. 006	SERIAL NO. 13602	DRAWING NO. S - 28383