


DuraSheath®

EPR/CSPE, Medium-Voltage Power, Non-Shielded 2400 V, UL Type MV-90

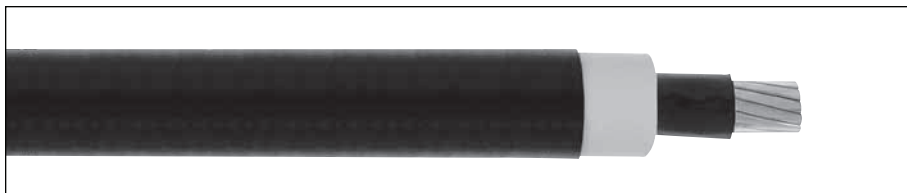

Features:

- Rated at 90°C
- Excellent heat and moisture resistance
- Flexibility for easy handling
- High dielectric strength
- Low moisture absorption
- Electrical stability under stress
- Low dielectric loss
- Chemical- and sunlight-resistant
- Simplification of splicing and terminating by elimination of need to handle cable shield
- Extra-tough, mechanically rugged composite insulation and jacket construction
- Meets cold bend test at -35°C

Product Construction

Conductor:

- 8 AWG thru 1000 kcmil annealed bare copper compact Class B strand

Extruded Strand Shield (ESS):

- Extruded thermoset semi-conducting stress-control layer over conductor

Insulation:

- Ethylene Propylene Rubber (EPR) insulation, colored to contrast with the black jacket material

Jacket:

- Low-lead Chlorosulfonated Polyethylene (CSPE)/Elastomer blend

Print:

- GENERAL CABLE® (MI) SIZE (AWG or KCMIL) COMPACT CU DURASHEATH® LL 2400 V NONSHIELDED EP TYPE MV-90 WET OR DRY SUN RES FOR CT USE OIL RES II (UL) MONTH/ YEAR OF MFG SEQUENTIAL FOOTAGE MARK

* Sizes smaller than 1/0 AWG do not include "FOR CT USE"

Options:

- Multi conductor constructions
- Other constructions available upon request

Applications:

- Proven record of reliable performance through extensive use in these applications: pulp and paper mills, petrochemical plants, sewage treatment facilities, water treatment plants, steel mills, textile mills, utility power generating stations, scrubbers and other environmental protection systems, railroad and mining facilities

Applications: (cont'd.):

- For use in industrial and utility applications where ease of installation is a major concern because of limited space and exposure to personnel is minimal
- For use in wet or dry locations when installed in accordance with NEC
- For use in aerial, conduit, open tray and underground duct installations

Compliances:

- National Electric Code (NEC)
- ICEA S-96-659/NEMA WC71
- UL 1072
- FAA L824 specification for cable for Underground Airport Lighting Circuits
- UL listed as Type MV-90 for use in accordance with NEC, UL File # E90501
- Sizes 1/0 AWG and larger are listed and marked "Sunlight-Resistant FOR CT USE" in accordance with NEC and also meet IEEE 383 (70,000 BTU/hr)
- Listed "oil-resistant II"
- Meets EPA 40 CFR, Part 261 for leachable lead content per TCLP method
- OSHA acceptable

Packaging:

- Material cut to length and shipped on non-returnable wood reels

CATALOG NUMBER	COND. SIZE (AWG/kcmil)	NOMINAL CONDUCTOR DIAMETER		NOMINAL EXTRUDED STRAND SHIELD DIAMETER		NOMINAL INSULATION THICKNESS		NOMINAL INSULATION DIAMETER		NOMINAL CABLE O.D.		COPPER WEIGHT		NET WEIGHT	
		INCHES	mm	INCHES	mm	INCHES	mm	INCHES	mm	INCHES	mm	LBS/1000 FT	kg/km	LBS/1000 FT	kg/km
2400 V, UL TYPE MV-90															
14901.410800*	8	0.14	3.56	0.15	3.81	0.125	3.18	0.41	10.41	0.58	14.73	51	76	196	292
14901.410600	6	0.17	4.32	0.19	4.83	0.125	3.18	0.44	11.18	0.62	15.75	81	121	241	359
14901.410400	4	0.22	5.59	0.23	5.84	0.125	3.18	0.49	12.45	0.66	16.76	129	192	308	458
14901.410200	2	0.27	6.86	0.29	7.37	0.125	3.18	0.55	13.97	0.72	18.29	205	305	408	607
14901.410100*	1	0.31	7.87	0.33	8.38	0.125	3.18	0.58	14.73	0.76	19.30	259	385	476	708
14901.415100	1/0	0.34	8.64	0.36	9.14	0.125	3.18	0.62	15.75	0.79	20.07	326	485	562	836
14901.415200	2/0	0.38	9.65	0.41	10.41	0.125	3.18	0.66	16.76	0.84	21.34	411	612	666	991
14901.415300*	3/0	0.43	10.92	0.45	11.43	0.125	3.18	0.71	18.03	0.92	23.37	518	771	823	1225
14901.415400	4/0	0.48	12.19	0.50	12.70	0.125	3.18	0.76	19.30	0.97	24.64	653	972	983	1463
14901.416000	250	0.53	13.46	0.55	13.97	0.140	3.56	0.84	21.34	1.08	27.43	772	1149	1183	1761
14901.416200	350	0.62	15.75	0.64	16.26	0.140	3.56	0.93	23.62	1.17	29.72	1080	1607	1545	2299
14901.416500	500	0.74	18.80	0.77	19.56	0.140	3.56	1.06	26.92	1.30	33.02	1544	2298	2077	3091
14901.417000	750	0.91	23.11	0.94	23.88	0.155	3.94	1.26	32.00	1.54	39.12	2316	3447	3040	4524
14901.417500*	1000	1.06	26.92	1.09	27.69	0.155	3.94	1.42	36.07	1.70	43.18	3086	4593	3913	5823

Dimensions and weights are nominal; subject to industry tolerances.
*Non-stock item; minimum runs apply. Please consult Customer Service for price and delivery.

