

Long Outlet Shape, VG style

- Helashrink 130 Series, with rib, low profile

This style is low profile and lightweight. Typically used on airborne harnesses. Rib locates on circular backshell. For VG shapes with portholes "P" please refer to product standards tables in the appendix.




135-1 supplied / fully recovered.

For Material / Adhesive selection and other information please refer to page 10.



a: Expanded form (supplied)

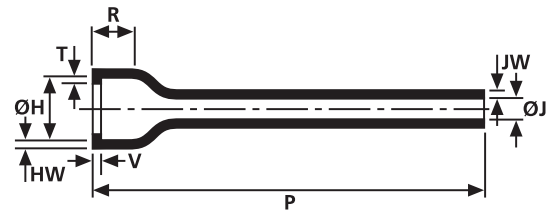

b: Fully recovered form (after heating)

Sizes and Type Table

Type	Designation as per VG-Norm	ØH min. a	ØH max. b	ØJ min. a	ØJ max. b	P ± 10%	R ± 10%	HW ± 20%	JW ± 20%	V ± 10%	T ± 10%
129-1	VG95343T06D001A	22.0	12.0	22.0	6.5	76.0	12.0	1.5	1.1	3.0	1.0
130-1	VG95343T06D002A	25.5	15.0	25.5	7.5	83.0	12.0	1.5	1.1	3.0	1.0
131-1	VG95343T06D003A	29.0	19.0	29.0	8.5	89.0	12.0	1.8	1.1	3.0	1.0
132-1	VG95343T06D004A	34.0	23.0	34.0	10.0	102.0	12.0	1.8	1.1	3.0	1.0
133-1	VG95343T06D005A	37.0	30.0	37.0	11.0	108.0	14.0	2.0	1.1	3.0	1.7
134-1	VG95343T06D006A	43.5	34.0	43.5	12.0	114.0	15.0	2.0	1.1	3.0	1.7
135-1	VG95343T06D007A	50.0	41.0	50.0	14.5	118.0	15.0	2.3	1.4	3.0	1.7
136-1	VG95343T06D008A	62.5	47.0	62.5	18.0	121.0	16.0	2.5	1.4	3.0	2.0
138-1	VG95343T06D009A	69.0	60.0	69.0	20.0	127.0	16.0	2.5	1.4	3.0	2.0
187-1	VG95343T06D010A	81.5	67.0	81.5	23.0	133.0	16.0	2.5	1.4	3.0	2.0
129-4	–	22.3	11.4	22.3	6.5	105.9	11.7	1.5	1.1	3.0	1.0
130-4	–	25.6	15.0	25.6	7.4	121.2	12.2	1.5	1.1	3.0	1.0
131-4	–	29.4	18.8	29.4	8.4	138.7	12.2	1.8	1.1	1.0	1.0
132-2	–	34.0	22.9	34.0	9.7	35.0	12.2	1.8	1.1	3.0	1.0
132-4	–	34.0	22.9	34.0	9.7	159.5	12.2	1.8	1.1	3.0	1.0
133-2	–	37.3	26.9	37.3	10.4	47.0	14.0	2.0	1.1	3.0	1.7
133-3	–	37.3	29.5	37.3	10.4	60.0	14.0	2.0	1.1	3.0	1.7
133-4	–	37.3	26.9	37.3	10.4	177.8	14.0	2.0	1.1	3.0	1.7
134-4	–	43.7	34.0	43.7	12.2	203.2	15.2	2.0	1.1	3.0	1.7
135-4	–	50.0	41.2	50.0	14.2	203.2	15.2	2.3	1.4	3.0	1.7
136-2	–	70.0	47.0	70.0	17.5	125.0	16.0	2.5	1.4	3.0	2.0
136-4	–	62.7	47.0	62.7	17.5	203.2	16.0	2.5	1.4	3.0	2.0

All dimensions in mm. Subject to technical changes.