

200C/7.5KVAC,

HI VOLT SILICONE 200C/7.5KVAC HIGH-VOLTAGE LEAD WIRE

RATINGS / APPROVALS

200°C – 7.5 KV - UL Style 3514

CONSTRUCTION

Conductors

22 AWG – 12 AWG **Overcoated**


Stranded tinned copper or nickel-plated copper

Insulating System

Extruded Silicone Rubber

Outer Covering

FEP Clear Teflon

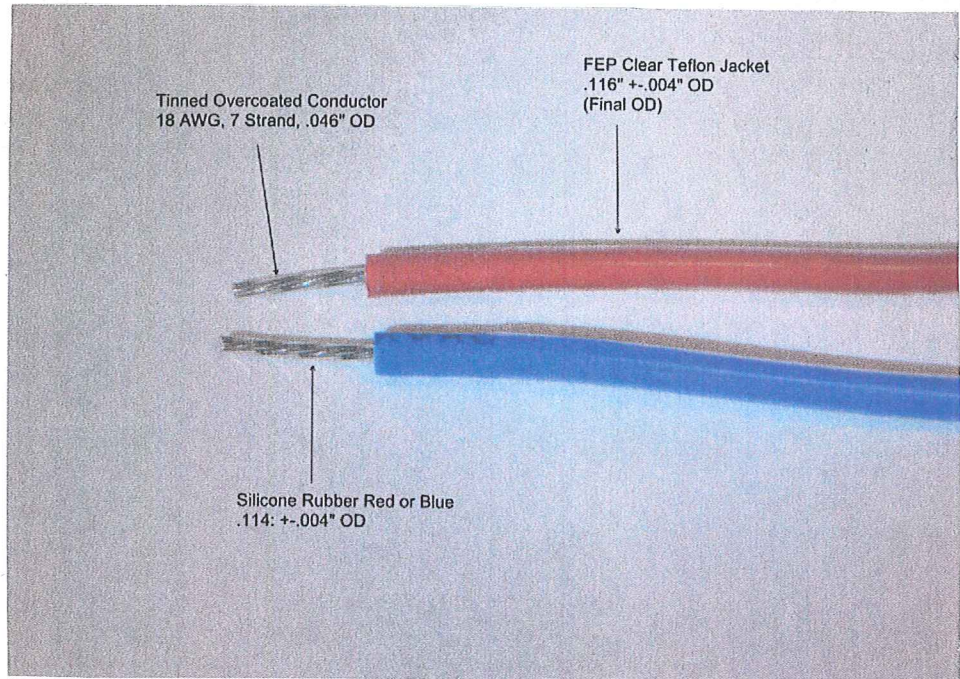

CHARACTERISTICS

- Silicone formulations suitable for UV, ozone, moisture exposure.
- Not suited for immersed applications.
- Suitable for applications to -60°C.
- Silicone Rubber in extreme environments, exceeding rated temperature, leaves a non-conductive ash and retains excellent insulation properties.

HI VOLT SILICONE 200C/7.5KVAC

Part No.	Awg. Size	# Strands	Outer Dia. inches	Outer Dia. mm	Wgt - lbs per 1000 ft.	Wgt - kg per km	UL
E.L.A. 8U007	18	7	0.116	2.95	10.45	15.55	3514

Radix™

Radix Wire Company
26000 Lakeland Boulevard • Cleveland, OH 44132
Tel: 216 731-9191 • Fax: 216 731-7082
www.radix-wire.com