

MOTOMAN P/N: 146272-2

NUMBER OF 12 AWG PRIMARIES: 4  
CONDUCTOR: 12 AWG (65/30) TINNED PLATED COPPER  
PRIMARY INSULATION: .015" MIN. AVG. WALL ETFE  
PRIMARY O.D.: .119" ( + / - .003")  
COLOR CODE: BLACK, BLACK, BLACK, GREEN/YELLOW


NUMBER OF 18 AWG PRIMARIES: 2  
CONDUCTOR: 18 AWG (19/30) TINNED PLATED COPPER  
PRIMARY INSULATION: .010" MIN. AVG. WALL ETFE  
PRIMARY O.D.: .067" NOM.  
COLOR CODE: BLUE, BLUE

FILLERS: FOAMED POLYPROPYLENE - NON WICKING  
AS REQUIRED FOR ROUNDNESS

SEPARATOR: NON-WOVEN POLYESTER TAPE

JACKET: .055" NOM. WALL POLYURETHANE  
JACKET COLOR: BLACK  
FINISHED DIAMETER: .450" ( + / - .015")  
CABLE RATINGS: 600V, 105°C (UL), 105°C (CSA)  
APPROVALS PER UL STYLE 20952 & CSA

MIN BEND RADIUS: 3.5"

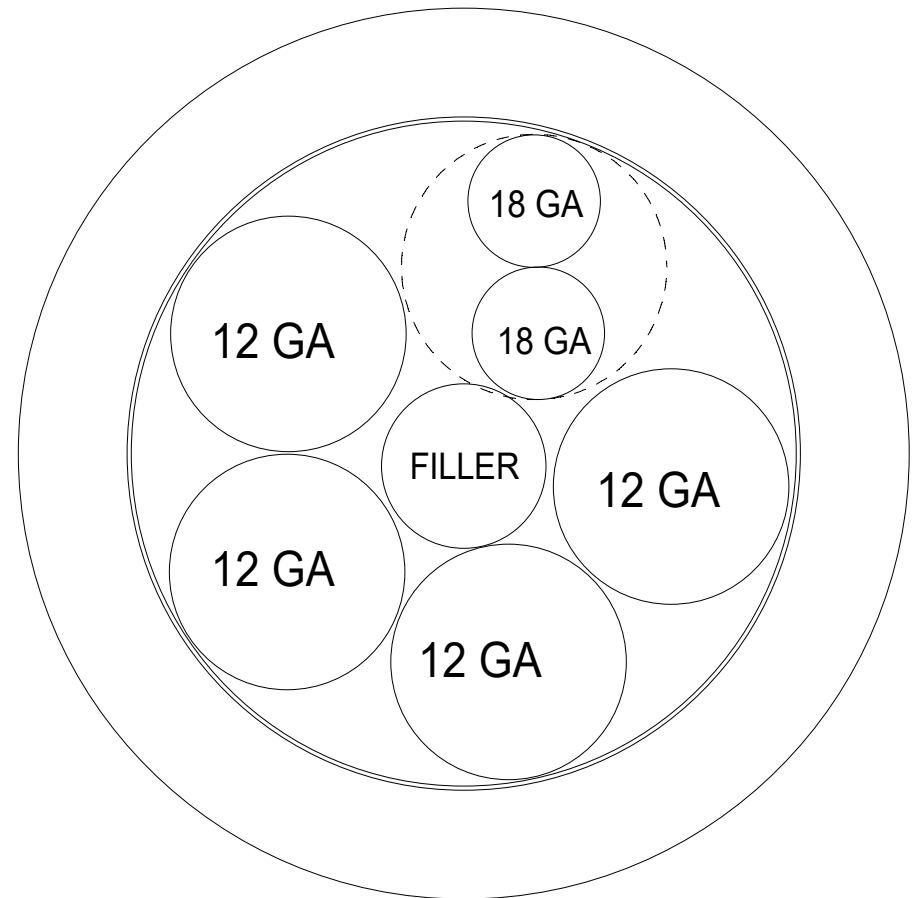

REVISIONS:	DATE:

P/N: 0006CB-0QSE2 (120938 MOD.)

DATE: 8/2/04

DRAWN: RD

INDUSTRIAL ELECTRIC  
WIRE & CABLE, INC.

31390 VIKING PARKWAY  
WEST LAKE, OHIO 44145-0282  
PH: 440-835-5601 FAX: 440-835-5971