

18C COMPOSITE CABLE
NUMBER OF CONDUCTORS: 6
AWG/STRAND: 18 AWG (19/30) TINNED COPPER
PRIMARY INSULATION: .010" NOMINAL WALL ETFE
PRIMARY O.D.: .067" +/- .002"
COLOR CODE: BLU1,BLU2,BLU3,BLU4,BLU5,BLU6

NUMBER OF CONDUCTORS: 12
AWG/STRAND: 16 AWG (26/30) TINNED COPPER
PRIMARY INSULATION: .010" NOMINAL WALL ETFE
PRIMARY O.D.: .078" +/- .002"
COLOR CODE: BLK1,BLK2,BLK3,BLK4,BLK5,BLK6,BLK7,
BLK8,BLK9,GRN/YEL1,GRN/YEL2,GRN/YEL3


FILLER: FIBRILATED FILLER IN CENTER

CABLE: (12) 16 AWG PRIMAIRES + (6) 18 AWG PRIMARIES
AROUND CENTER FILLER

SEPARATOR: NON-WOVEN POLYESTER

JACKET: .050" NOMINAL WALL POLYURETHANE
JACKET COLOR: BLACK
FINISHED O.D.: .470" +/- .010"

RATING: UL 20952 & CSA 600 VOLTS 105°C
NOM WEIGHT: 207 LBS/1000'

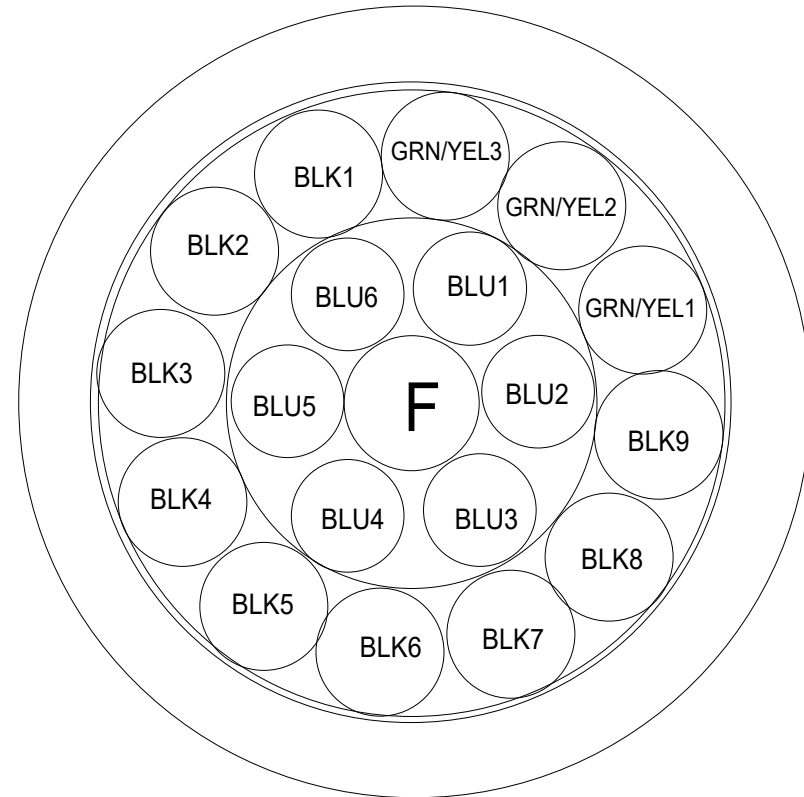

DISC.: 6/C 18 + 12/C 16 AWG ETFE, PUR

P/N: RQS1712096

DATE: 9/25/2024

DRAWN BY: S.WING

OMERIN USA
95 RESEARCH PARKWAY
MERIDEN, CT 06450
TEL. 203-237-2297 FAX. 203-634-8756