


High Voltage Shielded Battery Cable

35mm² XL4R
1000V AC OR 1500V DC
150°C XLPO Insulation / 150°C XLPO Jacket , Thin Wall



PRODUCT DATA SHEET

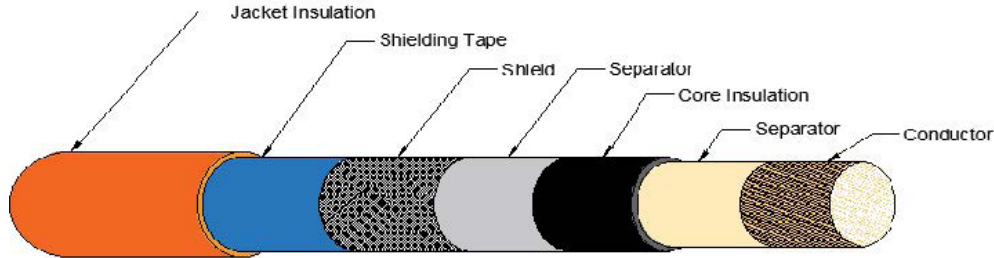

PART NUMBER:	32178701
Color:	Orange
Core Insulation Color:	Black
Bend Radius, Min:	5X OD (Static Installation)
Bend Radius, Min:	10X OD (Dynamic Installation)
Print Legend:	NA
Ink Color:	NA
Temperature Rating:	-40°C to 150°C
Packaging:	Reels
Specifications:	ISO: 19642-9 (Jacket, Thin Wall, Temp Class D) ISO: 19642-5 (Core, Thin Wall, Temp Class D) RoHS compliant

CONDUCTOR	
Size:	35 mm ²
Number of Strands:	1064
Strand Diameter, Max:	0.21 mm
Conductor Diameter, Max:	9.00
Resistance, Max:	0.527 mΩ/m at 20° C
CSA mm2, Min.:	32.7
CSA mm2, Max.:	35.3
Conductor:	Bare Copper
Separator:	Physical Separator

INSULATION	
Insulation material:	150°C XLPO
Min Wall:	0.64 mm (0.025 in)
Nom Wall:	0.80 mm (0.031 in)
Diameter, Min:	9.40 mm (0.370 in)
Diameter, Max:	10.40 mm (0.409 in)
Strip force:	Strip Readily
Separator:	Physical Separator

SHIELD	
Shield Material	Tinned Copper
Strand Diameter, Max:	0.21 mm (0.008 in)
Diameter Over Shield, Max:	11.2 mm (0.441 in)
Separator:	Physical Separator
JACKET	
Jacket material:	150°C XLPO
Min Wall:	0.80 mm (0.031 in)
Nom Wall:	1.00 mm (0.039 in)
Diameter, Min:	12.60 mm (0.496 in)
Diameter, Max:	13.20 mm (0.520 in)
Strip force:	Strip Readily

Application: Designed specifically to handle the higher voltage and electrical currents required by today's hybrid and battery powered vehicles.

Date	Rev	Description	By
2023/07/20	0	Spec created	JLL

All trademarks are property of their respective owners. All specifications are subject to change.

www.iewc.com