


High Voltage Shielded Battery Cable

95mm² EP4R
1000V AC OR 1500V DC
150°C XLPO Insulation / 150°C XLPO Jacket, Thin Wall



PRODUCT DATA SHEET

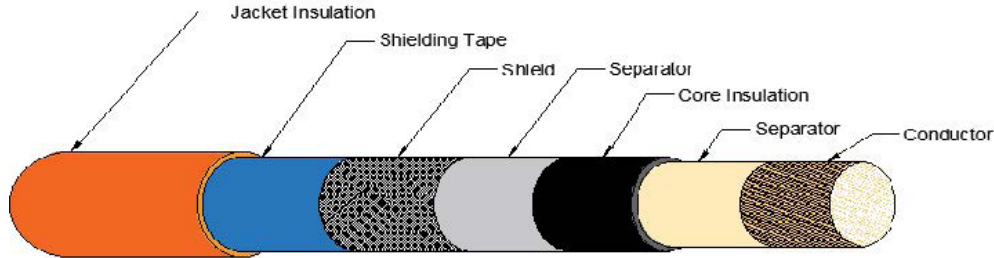

PART NUMBER:	32178704
Color:	Orange
Core Insulation Color:	Black
Bend Radius, Min:	5X OD (Static Installation)
Bend Radius, Min:	10X OD (Dynamic Installation)
Print Legend:	NA
Ink Color:	NA
Temperature Rating:	-40°C to 150°C
Packaging:	Reels
Specifications:	ISO: 19642-9 (Jacket, Thin Wall, Temp Class D) ISO: 19642-5 (Core, Thin Wall, Temp Class D) RoHS compliant

CONDUCTOR

Size:	95 mm ²
Number of Strands:	2888
Strand Diameter, Max:	0.21 mm
Conductor Diameter, Max:	14.80
Resistance, Max:	0.196 mΩ/m at 20° C
CSA mm ² , Min.:	88.0
CSA mm ² , Max.:	95.0
Conductor:	Bare Copper
Separator:	Physical Separator

INSULATION

Insulation material:	150°C XLPO
Min Wall:	0.90 mm (0.035 in)
Nom Wall:	1.13 mm (0.044 in)
Diameter, Min:	15.30 mm (0.602in)
Diameter, Max:	16.70 mm (0.657 in)
Strip force:	Strip Readily
Separator:	Physical Separator

SHIELD

Shield Material:	Tinned Copper
Strand Diameter, Max:	0.26 mm (0.010 in)
Diameter Over Shield, Max:	17.7 mm (0.697 in)
Separator:	Physical Separator

JACKET

Jacket material:	150°C XLPO
Min Wall:	0.88 mm (0.035 in)
Nom Wall:	1.10 mm (0.043 in)
Diameter, Min:	19.10 mm (0.752 in)
Diameter, Max:	19.90 mm (0.783 in)
Strip force:	Strip Readily

Application: Designed specifically to handle the higher voltage and electrical currents required by today's hybrid and battery powered vehicles.

Date	Rev	Description	By
2023/07/26	0	Spec created	JLL

All trademarks are property of their respective owners. All specifications are subject to change.

www.iewc.com