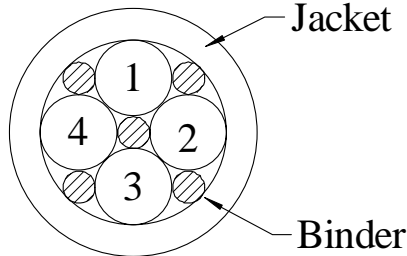


Description: Four Conductor, 16 AWG,
 Tray Cable With Overall PVC Jacket

Date: 5/15/2008

JM Part Number: JM55446

Reference: TBD

Cable Diagram

Components

Four 16 AWG Singles

Conductor: 16 AWG, 26/30 bare copper

Insulation: .016" wall of PVC (See Color Code)

Nylon Jacket: .005" wall of Clear Nylon .100"

Cable Construction

Cabling: Four conductors cabled together (LHL), with fillers as necessary

Mylar: Clear Mylar tape

Jacket: .047" nominal wall of Black PVC .339"

Print
E73202 4/C 16 AWG 600V TYPE TC (UL) 90C DRY 75C WET SUN RES DIR BUR
--- LL41103 CSA AWM I/II A/B 90C 600V FT1
Color Code

1. Black and numerically printed: 1 - ONE
2. White and numerically printed: 2 - TWO
3. Red and numerically printed: 3 - THREE
4. Green and numerically printed: 4 - FOUR

Requirements

 Temperature: 90°C
 Voltage: 600V

 Approvals: UL Type TC
 CSA AWM, FT1
 Sunlight Resistant
 Direct Burial

| | | | | |
|-------------|-----|-----------|--------|--------------------------|
| Written By: | rjc | 5/15/2008 | Rev. 0 | Initial Issue |
| Revised By: | scs | 6/16/2014 | Rev. 1 | Removed Reference Number |
| Revised By: | | | | |
| Revised By: | | | | |