


UL 2517 24AWG/6C PVC Black



PRODUCT DATA SHEET

Internal wiring or external interconnection of electronic equipment.

Design Number 10930
Part Number N/A
Customer Number N/A

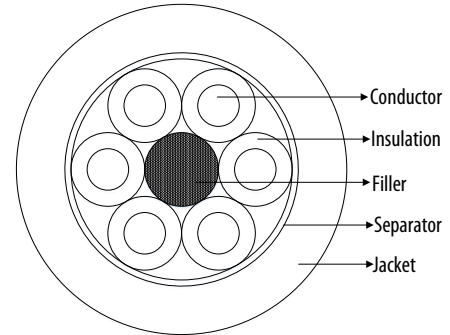

CONSTRUCTION

Conductor: Stranded tinned copper, Class B
Conductor Size: 24AWG(7/32)
Insulation: Polyvinyl Chloride
Insulation Thickness: 0.010"(Nom.)
Insulation Diameter: 0.043"(Nom.)
Cable Lay Length: 2.00"(Nom.)
Filler: Fibrillated Poly Filler
Separator: Tissue Paper, 100% Coverage
Jacket Material: Polyvinyl Chloride
Jacket Thickness: 0.030"(Nom.)
Overall Diameter: 0.193"(Nom.)
Jacket Color: Black (Matte)

Print Legend (Footage Markers):

ASCENT E477982 ** 24AWG 6C AWM 2517 300V 105°C OR C
AWM I/II A/B 105C 300V FT1 VW-1 "ROHS COMPLIANT" MADE IN USA

Note: "****" is factory code

Color Code: Red, Black, White, Yellow, Blue, Green

ELECTRICAL CHARACTERISTICS

Operating Temperature (°C): 105°C
Operating Voltage: 300V
Weight: 22 Lbs/Mft

SAFETY CHARACTERISTICS

Approvals: UL AWM Style 2517 per UL standard 758
cRU component AWM I/II A/B 105C 300V FT1 VW-1
RoHS Compliant
REACH Compliant

Application: Internal wiring or external interconnection of electronic equipment

All trademarks are property of their respective owners. All specifications are subject to change.

Revision History		
00	2024/02/05	Initial Release
Created L. Jian		Approved A. Huang

Milwaukee | 5001 South Towne Dr. New Berlin, WI 53151, USA
Frankfurt | Rudolf-Braas-Strasse 2, D-61381 Friedrichsdorf, Germany
Luton | Unit 11, Humphrys Road, Woodside Industrial Estate, Dunstable, LU5 4TP, UK
Suzhou | B2-2 Weiting Industrial - Workshop A, No. 9 Weixin Road, Suzhou Industrial Park, China

