


Part	I.D ±0.010	O.D ±0.010	Wall ±0.006
MQ1250 (1/8)	0.168	0.260	0.013
MQ2500 (1/4)	0.288	0.390	0.013
MQ3437 (11/32)	0.342	0.500	0.013
MQ3750 (3/8)	0.415	0.532	0.013
MQ4500 (7/16)	0.440	0.613	0.013
MQ5000 (1/2)	0.511	0.660	0.013
MQ6250 (5/8)	0.663	0.806	0.013
MQ7500 (3/4)	0.790	0.928	0.013
MQ10000 (1.0)	0.917	1.073	0.013
MQ10625F (1-1/16)	1.010	1.215	0.013
MQ10625C (1-1/16)	1.068	1.345	0.013
MQ11250 (1-1/8)	1.139	1.370	0.013
MQ12500 (1-1/4)	1.295	1.500	0.013
MQ14500 (1-7/16)	1.438	1.653	0.013
MQ1500-SA (1-1/2)	1.465	1.734	0.013
MQ16250-SA (1-5/8)	1.575	1.917	0.013
MQ18580-SA (1-7/8)	1.849	2.194	0.013

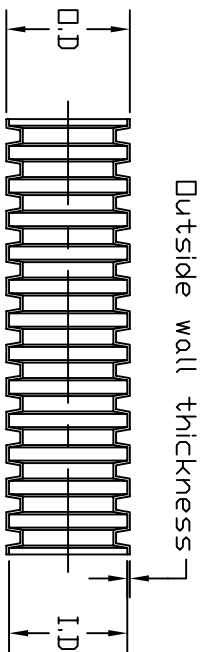

- Parts available in Nylon 6, Polyethylene, Polypropylene, Fire retardant Polyethylene, Fire retardant Polypropylene and Polyester
- Standard color. Determinate by customer
- Specify Silt or not Silt, with or with out stripe
- Materials meet Automotive Specifications.
- Meets Ford Motor Company, Specification ES-XUST-14A099-AA
- Meets Daimler Chrysler Specification PF10105

7. change standard color criteria 2-7-07
6. add 1-1/16 Chrysler 7-13-06
5. Update complete drawing 01-31-06

M&Q Plastic Products, LP
 Wire Protection Division
 Inch Size Conduit
 Drawn by R. Puga
 Approved by J. Chituras
 06-16-00 MQ-14126



Note: all dimensions are in Inches