


## Technical data sheet

PUR servo cables · C-track compatible · shielded

**LUTZE SUPERFLEX® PLUS M (C) PUR SERVO 0,6/1 kV**  
High Flexing Motor Cable for Siemens and other systems  
For highest requirements

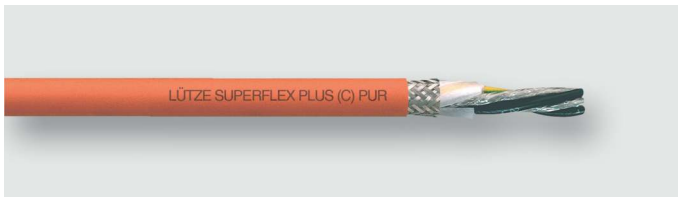

### Identification

Type	SU+ M (C) PUR SE (4G1,5+(2×1,5)) 90°C
Part No.	<a href="#">111420.1000</a>
SIEMENS designation*	1BA11

### Product version

Datasheet version	00
-------------------	----

### Use/Application/Properties

Application	<ul style="list-style-type: none"><li>• Termination cable motor or motor/brake especially for frequency converters and SERVO drives in machine and plant construction, transport and conveyor technology</li><li>• Through optimized cable construction optimally suited for continuous flexing applications in C-tracks</li><li>• Very good resistance against aggressive coolants and lubricants</li><li>• Especially for industrial environments in mechanical and system engineering</li></ul>
Properties	<ul style="list-style-type: none"><li>• High active and passive interference resistance (EMC)</li><li>• Braided shield optimised for continuous flexing use</li><li>• Very good alternating bending strength</li><li>• Low adhesion, abrasion-resistant, nick-resistant, tear-resistant</li><li>• Hydrolysis-resistant, microbe-resistant, and rot-resistant</li><li>• Weathering, ozone and UV resistant (normal lighting conditions)</li><li>• Excellent coolant and lubricant resistance</li><li>• Largely resistant to oils, greases, alcohol-free benzines and kerosene</li><li>• Silicone free</li></ul>

### Construction

Description	SUPERFLEX® PLUS M (C) PUR SERVO 0,6/1 kV
Number of conductors/cross-section	(4G1,5+(2×1,5))
Number of conductors	6
Cross-section, metric	1.5 mm <sup>2</sup>

#### United Kingdom: LÜTZE Ltd.

Unit 3, Sandy Hill Park  
Sandy Way, Amington • GB-Tamworth, Staffs B77 4DU  
Tel. +44 (0)1827 31333-0 • Fax +44 (0)1827 31333-2  
[www.lutze.com](http://www.lutze.com) • [sales.gb@lutze.co.uk](mailto:sales.gb@lutze.co.uk)

#### Germany: Friedrich Lütze GmbH

Postfach 12 24 (PLZ 71366) • Bruckwiesenstraße 17-19 • D-71384 Weinstadt  
Tel. +49 (0)7151 6053-0 • Fax +49 (0)7151 6053-277(-288)  
[www.luetze.de](http://www.luetze.de) • [info@luetze.de](mailto:info@luetze.de)

## Technical data sheet

### PUR servo cables · C-track compatible · shielded

---

Jacket material	Special PUR
Jacket color	orange similar to RAL 2003
Outer Ø	11.6 mm
Surface	adhesion-free, matte
Weight	21.93 kg/100 m
Weight	146.92 Lbs/Mft
Cu-Index	14.9 kg/100 m
Cable construction	Construction with one signal pair (white, black)

---

#### Construction Element 1

---

Element construction	<b>(4G1,5)</b>
Conductor	CU-wire bare
Conductor category	Superfinely stranded DIN VDE 0295 DIN EN 60228, class 6
Conductor marking	Power conductors black with numbered print U/L1/C/L+, V/L2, W/L3/D/L- · green/yellow
Conductor insulation	PP
Stranding	conductors twisted without mechanical stress layer pitch optimised

---

#### Construction Element 2

---

Element construction	(2×1,5)
Conductor	CU-wire bare
Conductor marking	black · white
Conductor insulation	PP
Stranding	conductors stranded in pairs
Element shielding	Braid shield tinned copper wires

---

#### Overall construction

---

Overall stranding	elements stranded together conductors twisted without mechanical stress layer pitch optimised
Overall shield	Braid shield optical cover approx. 85 %

---

#### Technical data

---

Rated voltage $U_0/U$	1000
Test voltage type	AC 4000 V
Temperature range moving	-25 °C ... +90 °C
Temperature range fixed	-40 °C ... +90 °C
Minimum bending radius moving	7.5×D
Minimum bending radius fixed	5×D
Bending cycles	≥10 Mio
Speed	5 m/s
Acceleration	50 m/s <sup>2</sup>

---

## Technical data sheet

PUR servo cables · C-track compatible · shielded

---

Torsion  $\pm 30^\circ/\text{m}$

---

### Technical Data Element 1

---

Element construction (4G1,5)  
Insulation resistance at 20 °C  $\geq 1000 \text{ M}\Omega \times \text{km}$   
Operating capacitance wire-wire 80 pF/m  
Operating capacitance wire-shield 140 pF/m

---

### Technical Data Element 2

---

Element construction (2×1,5)  
Operating capacitance wire-wire 140 pF/m  
Operating capacitance wire-shield 210 pF/m

---

### Certifications/Standards

---

Certifications cURus  
UL style AWM 21209  
Conformity CE  
RoHS  
REACH  
Burning behavior according to IEC 60332-1-1 to 1-3  
UL 1581 VW-1  
UL FT1  
Oil resistant according to UL 4d100C  
DIN EN 60811-404  
Halogen free according to IEC 60754-1  
DIN EN 60754-1

---

### General

---

Note CE These products are in conformity with the EU Low Voltage Directive 2014/35/EU  
\* Leitungen für MOTION-CONNECT 800PLUS. Siemens, MOTION-CONNECT 800PLUS und Siemens Artikelbezeichnungen sind eingetragene Warenzeichen der Siemens AG.