



# LÜTZE SUPERFLEX® N (C) PVC, Shielded

## High Flexing Control Cable with UL/CE Approvals

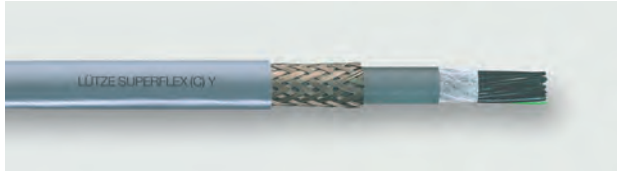

### Application

- Braid shielded, multi-conductor high flexing cable suitable for control, monitoring and instrumentation applications with continuous flexing in C-track
- Machine tools, gantry robots, conveyors and other continuous motion applications in industrial environments
- For flexing applications such as C-tracks and other applications where linear flexing occurs
- Compatible with all major brand C-tracks
- High performance linear flexing cable, compliant with **NFPA 79, 2012 Edition** Article 12.9 special cables and conductors

### Characteristics

- Extremely small cable ODs due to special **TPE High Glide Insulation** compliant with UL
- Sub-Jacket for increased flex life in high performance flexing and long cable runs
- Very flexible with superfine stranding
- Specially formulated PVC jacket per UL Class 43
- Non-wicking fillers
- Abrasion, high wear and tear resistance
- Hydrolysis, microbe and decompose resistant
- UV resistant per EN ISO 4892-2-A
- Dry and wet conditions
- Talc and Silicone free

### Technical Data

Voltage	600V UL AWM
Test voltage	3000V
Insulation resistance	Min 100MΩ x km
Temperature	Moving -5°C - +80°C Fixed -40°C - +80°C
Minimum Bending radius	Moving 10 x cable OD Fixed 6 x cable OD
Conductor marking	Black with white numbers and one green/yellow ground
Burning behavior	Flame retardant per UL VW-1, DIN EN 50265-2-1 CSA FT1
Oil resistance	4D100C, UL Oil res 80°C and DIN EN 60811-2-1
Approvals	cUL AWM Styles 10429/2570 CSA AWM I/II A/B 80C 600V RoHS REACH

### Construction

- Metric conductor
- Bare copper super finely stranded per DIN VDE 0295 Class 6 and IEC 60228 Class 6
- Special TPE conductor insulation
- G: with GNYE ground conductor  
x: without ground conductor
- Optimized construction for flexing applications
- Conductors cabled with fleece wrap
- PVC Sub-Jacket
- Tinned copper braid shield
- Special high strength PVC Jacket per UL class 43 / VDE 0207 TM5, oil resistant
- Gray Jacket RAL 7001

Part No.	Description No. of conductors incl. ground	OD / Ø ca. mm	OD / Ø inches	Weight Lbs/Mft	Copper Lbs/Mft
<b>AWG 20 / 0.5 mm<sup>2</sup></b>					
A1392003	(3G0.5)	7.4	0.292	54	21
A1392004	(4G0.5)	7.8	0.307	60	25
A1392005	(5G0.5)	8.5	0.333	71	29
A1392007	(7G0.5)	9.7	0.382	94	43
A1392012	(12G0.5)	11.3	0.444	129	64
A1392018	(18G0.5)	13.1	0.516	176	93
A1392025	(25G0.5)	15.1	0.593	202	119
<b>AWG 18 / 1.0 mm<sup>2</sup></b>					
A1391803	(3G1.0)	8.2	0.323	71	32
A1391804	(4G1.0)	8.8	0.347	83	40
A1391805	(5G1.0)	9.6	0.378	103	54
A1391807	(7G1.0)	11	0.431	133	70
A1391812	(12G1.0)	13	0.512	189	110
A1391818	(18G1.0)	14.9	0.587	260	161
A1391825	(25G1.0)	17.6	0.691	318	224
A1391834	(34G1.0)	19.4	0.765	399	291
<b>AWG 16 / 1.5 mm<sup>2</sup></b>					
A1391603	(3G1.5)	8.8	0.346	88	44
A1391604	(4G1.5)	9.6	0.378	109	60
A1391605	(5G1.5)	10.4	0.411	128	72
A1391607	(7G1.5)	11.9	0.469	165	95
A1391612	(12G1.5)	14.1	0.556	239	151
A1391618	(18G1.5)	16.2	0.638	336	224
A1391625	(25G1.5)	19.4	0.764	431	312
<b>AWG 14 / 2.5 mm<sup>2</sup></b>					
A1391404	(4G2.5)	11	0.433	155	90
A1391405	(5G2.5)	11.9	0.469	179	109
A1391407	(7G2.5)	13.6	0.537	216	143
<b>AWG 12 / 4 mm<sup>2</sup></b>					
A1391204	(4G4)	12.6	0.496	214	135