



 USA Cable Solutions

# **LUTZE**

## **Flexible Cable and Wire Management for Industrial Automation**

Control Cable  
Electronic Cable  
Actuator Sensor Cable  
BUS and Network Cable  
Motor Supply, VFD, Servo and Feedback Cable  
Wire and Cable Management  
Network Connectivity



SYSTEMATIC TECHNOLOGY

## LUTZE cable, connectivity and wire management solutions for industrial automation.



DESINA RoHS




- UL approvals
- NFPA 79 compliant cables
- Designed for the North American market
- Standard size reels available
- We cut cable to any length compliant with “UL processed wire respooled” procedure
- No minimum length required for standard items
- Low minimum order
- Our goal is “On Time-All the Time”




SYSTEMATIC TECHNOLOGY

# Efficiency in Automation

Cable • Connectivity • Cabinet • Control

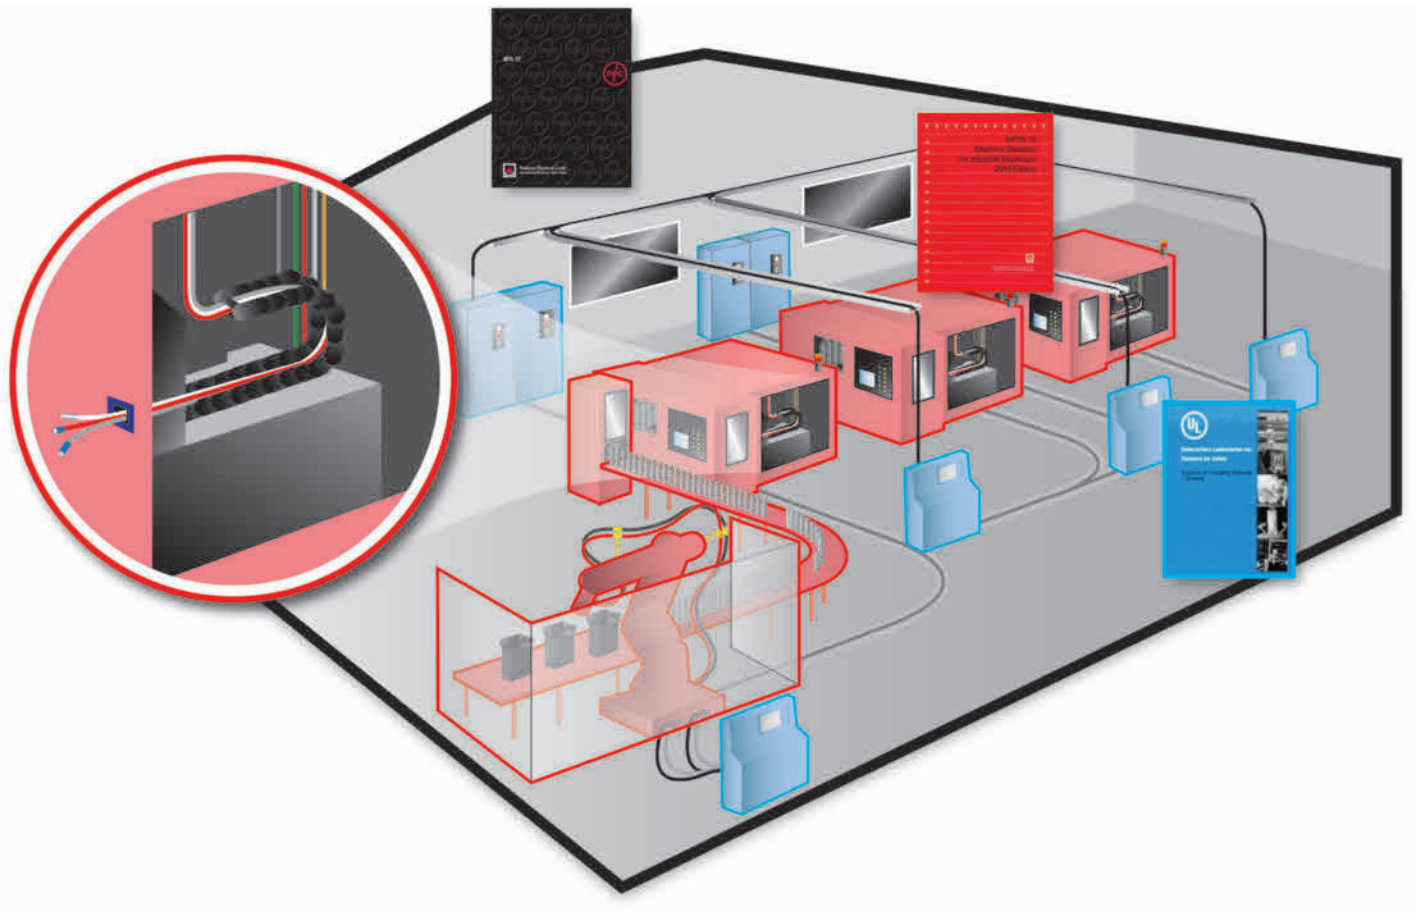


Your ultimate partner in cable and connectivity products for industrial automation. Our products are designed for harsh environments and carry multiple approvals for code compliance. This gives you peace of mind and allows you to stay focused on your projects.



NEC – regulates the field level



NFPA 79 – regulates the machine level



UL 508A – regulates the cabinet level



SYSTEMATIC TECHNOLOGY

# Table of Contents



## Chapter 1: Control Cable

### LUTZE SILFLEX® - Stationary and Flexible Applications

<b>PVC Unshielded</b> , Control TC-ER A308 .....	6
<b>PVC Shielded</b> , Control TC-ER A309 .....	8
<b>PVC Unshielded</b> , TC-ER A322 .....	9
<b>TPE Unshielded</b> , Premium Tray and Machine Tool Cable, TC-ER A332.....	10
<b>TPE Shielded</b> , Premium Tray and Machine Tool Cable, TC-ER A331 .....	11
<b>PVC Unshielded</b> , TC-ER with Blue Conductors A325 .....	12
<b>PVC Unshielded</b> , Control 108XXXA.....	13
<b>PVC Single Conductor, Multi-Norm</b> .....	14
<u>LUTZE SUPERFLEX® - Continuous Moving and High Flexing Applications</u>	
<b>PVC Unshielded</b> , Control A138.....	16
<b>PVC Shielded</b> , Control A139 .....	17
<b>PUR Unshielded</b> , Control.....	18
<b>PUR Shielded</b> , Control .....	19



## Chapter 2: Electronic Cable

### LUTZE SILFLEX® - Stationary and Flexible Applications

<b>PVC Unshielded</b> , Electronic PLTC A303.....	21
<b>PVC Shielded</b> , Electronic PLTC A313 .....	22
<b>PVC Shielded</b> , Electronic TP PLTC A314 .....	23
<u>LUTZE SUPERFLEX® - Continuous Moving and High Flexing Applications</u>	
<b>PUR Unshielded</b> , Electronic.....	24
<b>PUR Shielded</b> , Electronic.....	25
<b>PUR Shielded</b> , Electronic, TP .....	26



## Chapter 3: Actuator Sensor Cable

### LUTZE SUPERFLEX® - Continuous Moving and High Flexing Applications

<b>PUR Unshielded</b> , Tronic AS.....	28
<b>PUR Shielded</b> , Tronic AS.....	29





## Chapter 4: BUS and Network Cable

TPE Unshielded, Stationary and Flexible ASI BUS.....	31
PVC Shielded, Stationary and Flexible Profibus .....	32
PUR Shielded, High Flexing Profibus.....	33
PVC Shielded, Stationary and Flexible CAN-BUS .....	34
PUR Shielded, High Flexing CAN-BUS.....	35
PVC Shielded, Stationary and Flexible DeviceNet .....	36
PUR Shielded, High Flexing DeviceNet .....	37
PVC Shielded, Stationary and Flexible ETHERNET .....	38
PUR Shielded, High Flexing ETHERNET .....	39



## Chapter 5: Motor Supply, VFD, Servo and Feedback Cable

### LUTZE SILFLEX® - Stationary and Flexible Applications

TPE Unshielded, Premium Tray and Machine Tool Cable, TC-ER A332 .....	41
PVC Shielded, DRIVEFLEX® XLPE VFD, A106.....	42
PVC Shielded, DRIVEFLEX® XLPE VFD, A107.....	43
PVC Shielded, DRIVEFLEX® XLPE VFD, A216.....	44
PVC Shielded, DRIVEFLEX® XLPE VFD Servo I Motor Cable, A217 .....	45
PVC Shielded, DRIVEFLEX® XLPE VFD, Servo II Motor Cable, A218 .....	46
PVC Shielded, DRIVEFLEX® XLPE VFD 3 Symmetrical Grounds 1kV, A220.....	47
PVC Shielded, DRIVEFLEX® XLPE Control TP, A244.....	48
TPE Shielded, Motor Cable for Allen-Bradley® 2090 and other Systems, A316/A317	49
TPE Shielded, Feedback Cable for Allen-Bradley® and other Systems, A141.....	50

### LUTZE SUPERFLEX® - Continuous Moving and High Flexing Applications

PUR Unshielded, 0.6/1kV Motor Cable.....	51
PUR Shielded, 0.6/1kV Motor Cable .....	52
PUR Shielded, 0.6/1kV Composite Motor Cable, One Control Pair .....	53
PUR Shielded, 0.6/1kV Composite Motor Cable, Two Control Pairs .....	54
PUR Unshielded, 0.6/1kV Single Conductor Motor Cable .....	55
PUR Shielded, 0.6/1kV Single Conductor Motor Cable .....	56
PUR Shielded, Feedback Cable for Bosch-Rexroth® and other Systems .....	57
PUR Shielded, Feedback Cable for Allen Bradley® and other Systems .....	58
PUR Shielded, Feedback Cable for Siemens and other Systems .....	59
PUR Shielded, Feedback Resolver Cable for various Systems.....	60

## Chapter 6: Wire and Cable Management



### Plastic Cable Fittings

<b>NPT Fittings FPNPT</b> .....	62
<b>PG Fittings FPPG</b> .....	63
<b>Metric Fittings FPM</b> .....	64
<b>Locknuts NPT, PG and Metric LPNPT, LPPG, LPM</b> .....	65
<b>Metric Reducer</b> .....	66

### Metal Cable Fittings

<b>NPT Fittings FMNPT</b> .....	67
<b>PG Fittings FMPG</b> .....	68
<b>Metric Fittings FMM</b> .....	69
<b>Metric and NPT EMC2 Fittings, Quick Installation FMM, FMNPT</b> .....	70
<b>Metric and NPT EMC Fittings, Large Diameter FMM, FMNPT</b> .....	71
<b>Locknuts PG, Metric and EMC Metric LMPG, LMM</b> .....	72
<b>PG and Metric Reducers</b> .....	73
<b>Metric to NPT Adapters AMM</b> .....	74

### Specialty Fittings & Accessories

<b>Multihole Insert TPE PG, Metric, NPT</b> .....	75
<b>EMC rails with shield termination and strain relief</b> .....	76
<b>Cablefix Vario</b> .....	78
<b>Cablefix</b> .....	80



## Chapter 7: Network Connectivity Products


<b>USB 3.0 SuperSpeed Panel Connector</b> .....	82
<b>RJ45 Panel Pass Through</b> .....	82
<b>RJ45 IDC Industrial Connector</b> .....	83
<b>M12 / RJ45 Panel Pass Through</b> .....	83

## Chapter 8: Technical Overview ..... 84

## Part Number Index ..... 115



# 1. Control cables

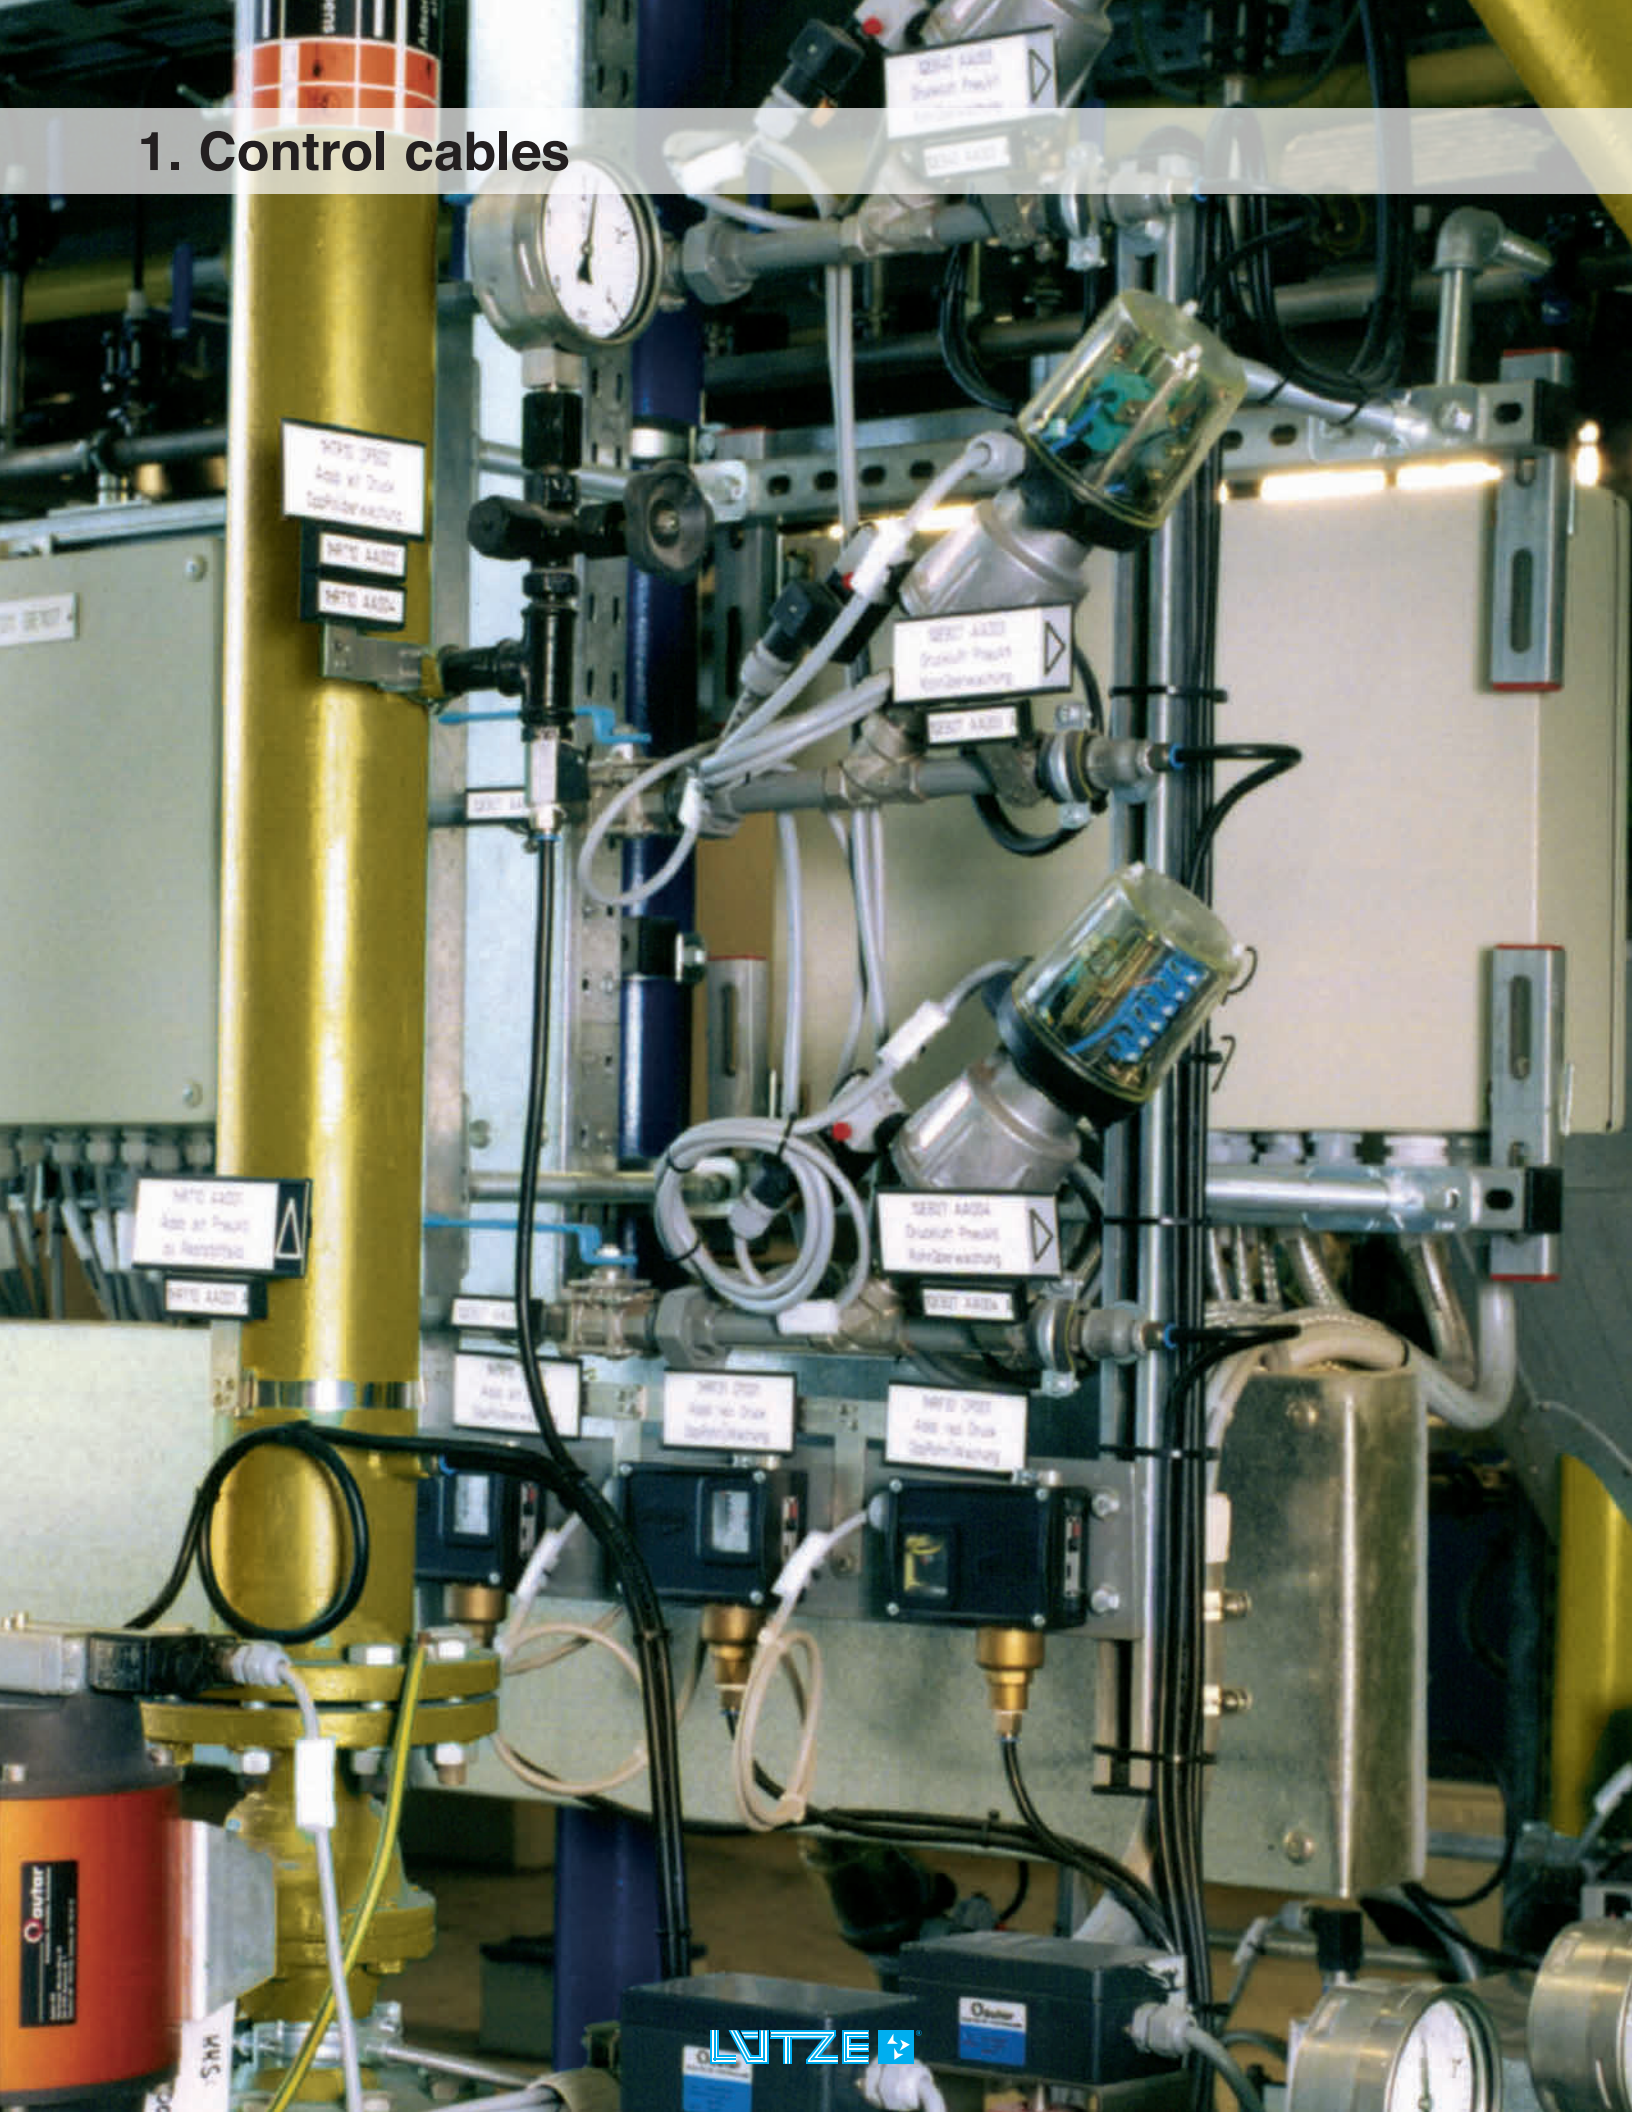



# LUTZE SILFLEX® Control Cable PVC, Unshielded

## Flexible Control and Tray Cable with UL/TC-ER-JP/WTTC/ITC-ER/PLTC-ER/MTW/CE Approvals



### Application

- Multi-conductor cable for tray and control applications, with **exposed run** (open wiring) approval
- Machine tools, machine and plant construction, HVAC technology, assembly and production lines, and other industrial applications
- Compliant with **NFPA 79** requirements
- TC-ER-JP for use on machines and in cable trays without conduit, which can reduce material and labor costs (AWG 18 and larger)
- WTTC – wind turbine tray cable rating for use in wind power generation (AWG 18 and larger)
- PLTC-ER – power limited tray cable exposed run
- ITC-ER – instrumentation tray cable
- Dry, damp or wet locations

### Characteristics

- Flexible design with Nylon for crush impact resistance per UL 1277 and easy installation
- Specially formulated jacket for oil resistance
- Gray jacket for control cable applications
- Non-wicking fillers
- Sunlight resistant
- Direct burial (AWG 18 and larger)
- Talc and Silicone free
- Joist Pull approval per 2017 NEC 336.10(9)\*\*

### Technical Data

Voltage	<b>AWG 20</b>
	600V UL MTW 300V PLTC-ER
Temperature	<b>AWG 18 and larger</b>
	600V UL TC-ER-JP/MTW 1000V WTTC
Minimum bending radius	-40°C - +90°C static 4 x cable OD
Conductor marking	Black with white numbers and one green/yellow ground *2C no ground included
Oil resistance	Oil Res II
Approvals	UL/AWM/CE AWM Style 20886 (UL) Type MTW or DP-1 Class I, II Div. 2 per NEC Art. 336, 392, 501, 502 c(UL) TC and CIC FT4 UL 1277 RoHS REACH
AWG specific approvals	<b>AWG 20:</b> PLTC-ER and ITC-ER <b>AWG 18 to AWG 12:</b> TC-ER-JP** and WTTC PLTC-ER and ITC-ER *2C TC approval only <b>AWG 10 and larger:</b> TC-ER-JP** and WTTC

Part No.	Description No. of conductors incl. ground	OD / Ø ca. mm	OD / Ø inches	Weight Lbs/Mft	Copper Lbs/Mft
<b>AWG 20 (10/30)</b>					
<b>A3082003</b>	AWG20/03C	6.8	0.268	41	9
<b>A3082004</b>	AWG20/04C	7.3	0.287	49	13
<b>A3082005</b>	AWG20/05C	7.9	0.313	57	16
<b>A3082007</b>	AWG20/07C	8.5	0.335	70	22
<b>A3082012</b>	AWG20/12C	10.8	0.426	110	38
<b>A3082018</b>	AWG20/18C	12.5	0.492	152	56
<b>A3082025</b>	AWG20/25C	17.1	0.672	229	79
<b>AWG 18 (19/30)</b>					
<b>A3081802</b>	AWG18/02C*	7.0	0.276	46	12
<b>A3081803</b>	AWG18/03C	7.5	0.296	54	18
<b>A3081804</b>	AWG18/04C	8.1	0.320	65	24
<b>A3081805</b>	AWG18/05C	8.8	0.346	82	30
<b>A3081807</b>	AWG18/07C	9.5	0.373	102	42
<b>A3081809</b>	AWG18/09C	10.8	0.425	128	54
<b>A3081812</b>	AWG18/12C	12.1	0.477	157	72
<b>A3081818</b>	AWG18/18C	14.9	0.587	240	108
<b>A3081825</b>	AWG18/25C	17.2	0.677	314	151
<b>A3081834</b>	AWG18/34C	18.9	0.744	404	205
<b>A3081841</b>	AWG18/41C	22.8	0.896	520	248
<b>A3081850</b>	AWG18/50C	23.1	0.910	630	302
<b>AWG 16 (26/30)</b>					
<b>A3081602</b>	AWG16/02C*	7.7	0.305	53	16
<b>A3081603</b>	AWG16/03C	8.2	0.321	66	24
<b>A3081604</b>	AWG16/04C	8.7	0.347	77	32
<b>A3081605</b>	AWG16/05C	9.5	0.377	98	40
<b>A3081607</b>	AWG16/07C	10.2	0.406	122	57
<b>A3081609</b>	AWG16/09C	12.0	0.473	159	73
<b>A3081612</b>	AWG16/12C	13.4	0.527	196	98
<b>A3081618</b>	AWG16/18C	16.4	0.647	294	147
<b>A3081625</b>	AWG16/25C	19.0	0.748	391	204
<b>A3081634</b>	AWG16/34C	22.3	0.876	541	278
<b>A3081641</b>	AWG16/41C	25.0	0.983	670	335
<b>AWG 14 (41/30)</b>					
<b>A3081403</b>	AWG14/03C	8.8	0.348	87	38
<b>A3081404</b>	AWG14/04C	9.6	0.378	108	51
<b>A3081405</b>	AWG14/05C	10.4	0.410	125	64
<b>A3081407</b>	AWG14/07C	11.3	0.445	164	89
<b>A3081409</b>	AWG14/09C	13.1	0.516	213	115
<b>A3081412</b>	AWG14/12C	15.5	0.610	283	154
<b>A3081418</b>	AWG14/18C	18.2	0.715	404	231
<b>A3081425</b>	AWG14/25C	20.9	0.825	537	321

### Construction

- AWG conductor
- Flexible fine wire stranded bare copper conductors
- PVC/Nylon insulation / THHN – THWN
- Oil resistant PVC jacket
- Gray jacket, similar to RAL 7001

Specifications are subject to change without prior notice  
\*\* JP starting productions 3/2017

1-800-447-2371



www.lutze.com



# LUTZE SILFLEX® Control Cable PVC, Unshielded

## Flexible Control and Tray Cable with UL/TC-ER-JP/WTTC/ITC-ER/PLTC-ER/MTW/CE Approvals



### Application

- Multi-conductor cable for tray and control applications, with **exposed run** (open wiring) approval
- Machine tools, machine and plant construction, HVAC technology, assembly and production lines, and other industrial applications
- Compliant with **NFPA 79** requirements
- TC-ER-JP for use on machines and in cable trays without conduit, which can reduce material and labor costs (AWG 18 and larger)
- WTTC – wind turbine tray cable rating for use in wind power generation (AWG 18 and larger)
- PLTC-ER – power limited tray cable exposed run
- ITC-ER – instrumentation tray cable
- Dry, damp or wet locations

### Characteristics

- Flexible design with Nylon for crush impact resistance per UL 1277 and easy installation
- Specially formulated jacket for oil resistance
- Gray jacket for control cable applications
- Non-wicking fillers
- Sunlight resistant
- Direct burial (AWG 18 and larger)
- Talc and Silicone free
- Joist Pull approval per 2017 NEC 336.10(9)\*\*

### Technical Data

Voltage	<b>AWG 20</b> 600V UL MTW 300V PLTC-ER <b>AWG 18 and larger</b> 600V UL TC-ER-JP/MTW 1000V WTTC
Temperature	-40°C - +90°C static
Minimum bending radius	4 x cable OD
Conductor marking	Black with white numbers and one green/yellow ground *2C no ground included
Oil resistance	Oil Res II
Approvals	UL/AWM/CE AWM Style 20886 (UL) Type MTW or DP-1 Class I, II Div. 2 per NEC Art. 336, 392, 501, 502 c(UL) TC and CIC FT4 UL 1277 RoHS REACH
AWG specific approvals	<b>AWG 20:</b> PLTC-ER and ITC-ER <b>AWG 18 to AWG 12:</b> TC-ER-JP** and WTTC PLTC-ER and ITC-ER *2C TC approval only <b>AWG 10 and larger:</b> TC-ER-JP** and WTTC

### Construction

- AWG conductor
- Flexible fine wire stranded bare copper conductors
- PVC/Nylon insulation / THHN – THWN
- Oil resistant PVC jacket
- Gray jacket, similar to RAL 7001

Specifications are subject to change without prior notice  
\*\* JP starting productions 3/2017

Part No.	Description No. of conductors incl. ground	OD / Ø ca. mm	OD / Ø inches	Weight Lbs/Mft	Copper Lbs/Mft
<b>AWG 12 (65/30)</b>					
A3081203	AWG12/03C	9.8	0.382	122	63
A3081204	AWG12/04C	11.1	0.437	150	84
A3081205	AWG12/05C	12.1	0.475	183	105
A3081207	AWG12/07C	14.1	0.556	255	147
<b>AWG 10 (105/30)</b>					
A3081004	AWG10/04C	14.6	0.573	239	130
A3081005	AWG10/05C	15.8	0.623	288	162
<b>AWG 8 (168/30)</b>					
A3080804	AWG8/04C	18.9	0.744	398	214
A3080805	AWG8/05C	22.4	0.882	452	268
<b>AWG 6 (266/30)</b>					
A3080604	AWG6/04C	20.8	0.820	535	339
<b>AWG 4 (413/30)</b>					
A3080404	AWG4/04C	27.2	1.070	927	514
<b>AWG 2 (665/30)</b>					
A3080204	AWG2/04C	31.1	1.225	1352	874

"Tray cable marked as TC-ER-JP (Joist Pull) has been evaluated by UL for pulling through structural members per the new NEC article 336.10(9)".



# LUTZE SILFLEX® Control Cable (C) PVC, Shielded

## Flexible Control and Tray Cable with UL/TC-ER-JP/WTTC/ITC-ER/PLTC-ER/MTW/CE Approvals



### Application

- Multi-conductor cable for tray and control applications, with **exposed run** (open wiring) approval
- Machine tools, machine and plant construction, HVAC technology, assembly and production lines, and other industrial applications
- Compliant with **NFPA 79** requirements
- TC-ER-JP for use on machines and in cable trays without conduit, which can reduce material and labor costs (AWG 18 and larger)
- WTTC – wind turbine tray cable rating for use in wind power generation (AWG 18 and larger)
- PLTC-ER – power limited tray cable exposed run
- ITC-ER – instrumentation tray cable
- Dry, damp or wet locations

### Characteristics

- Flexible design with Nylon for crush impact resistance per UL 1277 and easy installation
- Specially formulated jacket for oil resistance
- Gray jacket for control cable applications
- Non-wicking fillers
- Sunlight resistant
- Direct burial (AWG 18 and larger)
- Talc and Silicone free
- Joist Pull approval per 2017 NEC 336.10(9)\*\*

### Technical Data

Voltage	<b>AWG 20</b> 600V UL MTW 300V PLTC-ER <b>AWG 18 and larger</b> 600V UL TC-ER-JP/MTW 1000V WTTC
Temperature	-40°C - +90°C static
Bending radius	6 x cable OD
Conductor marking	Black with white numbers and one green/yellow ground *2C no ground included
Oil resistance	Oil Res II
Approvals	UL/AWM/CE AWM Style 20886 (UL) Type MTW or DP-1 Class I, II Div. 2 per NEC Art. 336, 392, 501, 502 c(UL) TC and CIC FT4 UL 1277 RoHS REACH
AWG specific approvals	<b>AWG 20</b> PLTC-ER and ITC-ER <b>AWG 18 to AWG 12</b> TC-ER-JP** and WTTC PLTC-ER and ITC-ER *2C TC approval only <b>AWG 10 and larger</b> TC-ER-JP** and WTTC

Part No.	Description No. of conductors incl. ground	OD / Ø ca. mm	OD / Ø inches	Weight Lbs/Mft	Copper Lbs/Mft
<b>AWG 20 (10/30)</b>					
A3092003	AWG20/03C	7.5	0.295	56	20
A3092004	AWG20/04C	8.0	0.315	65	25
A3092005	AWG20/05C	8.5	0.336	74	28
A3092007	AWG20/07C	9.1	0.360	92	36
A3092012	AWG20/12C	11.4	0.450	131	56
A3092018	AWG20/18C	13.2	0.520	181	78
A3092025	AWG20/25C	15.7	0.620	246	102
<b>AWG 18 (19/30)</b>					
A3091802	AWG18/02C*	7.7	0.305	61	23
A3091803	AWG18/03C	8.1	0.320	71	30
A3091804	AWG18/04C	8.8	0.345	86	36
A3091805	AWG18/05C	9.3	0.368	100	44
A3091807	AWG18/07C	10.0	0.395	121	58
A3091812	AWG18/12C	12.7	0.500	180	91
A3091818	AWG18/18C	15.5	0.609	268	131
A3091825	AWG18/25C	17.6	0.692	342	177
<b>AWG 16 (26/30)</b>					
A3091603	AWG16/03C	8.7	0.343	87	39
A3091604	AWG16/04C	9.4	0.370	102	48
A3091605	AWG16/05C	10.1	0.398	119	58
A3091607	AWG16/07C	10.9	0.430	145	75
A3091612	AWG16/12C	14.6	0.575	239	121
A3091618	AWG16/18C	16.9	0.664	327	174
A3091625	AWG16/25C	19.6	0.757	423	233
<b>AWG 14 (41/30)</b>					
A3091403	AWG14/03C	9.5	0.375	110	57
A3091404	AWG14/04C	10.3	0.405	133	72
A3091405	AWG14/05C	11.2	0.440	154	85
A3091407	AWG14/07C	12.1	0.475	194	113
A3091412	AWG14/12C	16.3	0.640	316	182
<b>AWG 12 (65/30)</b>					
A3091203	AWG12/03C	10.8	0.425	150	89
A3091204	AWG12/04C	11.7	0.460	182	110
<b>AWG 10 (105/30)</b>					
A3091004	AWG10/04C	15.2	0.600	284	169

### Construction

- AWG conductor
- Flexible fine wire stranded bare copper conductors
- PVC/Nylon insulation / THHN – THWN
- Shielded with foil tape, tinned copper braid and drain wire
- Oil resistant PVC jacket, gray, similar to RAL 7001

Specifications are subject to change without prior notice  
\*\* JP starting productions 3/2017

# LUTZE SILFLEX® Tray-ER PVC, Unshielded

## Flexible Tray Cable with UL/TC-ER-JP/WTTC/MTW/CE Approvals



### Application

- Multi-conductor cable for tray applications, with **exposed run** (open wiring) approval
- Compliant with **NFPA 79** for machine tool wiring
- TC-ER-JP for use with cable trays without conduit, which can reduce material and labor costs
- Machine tools, machine and plant construction, HVAC technology, assembly and production lines, and other industrial applications
- WTTC – wind turbine tray cable rating for use in wind power generation
- Dry, damp and wet locations

### Characteristics

- Flexible design with Nylon for crush impact resistance per UL 1277 and easy installation
- Specially formulated jacket for oil resistance
- Non-wicking fillers
- Sunlight resistant
- Direct burial
- UL Type TC-Exposed Run-Joist Pull
- Talc and Silicone free

### Technical Data

Voltage	600V UL TC-ER-JP 1000V WTTC
Temperature	-40°C - +90°C static
Minimum bending radius	4 x cable OD
Conductor marking	Black with white numbers and one green/yellow ground
Oil resistance	Oil Res II
Approvals	UL Type TC-ER-JP* UL/CE UL AWM Style 20886 (UL) Type MTW or DP-1 WTTC Class I, II Div. 2 per NEC Art. 336, 392, 501, 502 Joist Pull per NEC 336.10(9)* c(UL) TC CIC FT4 UL1277 RoHS REACH

### Construction

- AWG conductor
- Flexible fine wire stranded bare copper conductors
- PVC/Nylon insulation / THHN – THWN
- Oil resistant PVC jacket
- Black jacket, similar to RAL 9005

Specifications are subject to change without prior notice  
\* JP starting productions 3/2017

Part No.	Description No. of conductors incl. ground	OD / Ø ca. mm	OD / Ø inches	Weight Lbs/Mft	Copper Lbs/Mft
<b>AWG 18 (19/30)</b>					
A3221803	AWG18/03C	7.5	0.296	54	18
A3221804	AWG18/04C	8.1	0.320	65	24
A3221805	AWG18/05C	8.8	0.346	82	30
A3221807	AWG18/07C	9.5	0.373	102	42
A3221809	AWG18/09C	10.8	0.425	128	54
A3221812	AWG18/12C	12.1	0.477	157	72
A3221818	AWG18/18C	14.9	0.587	240	108
A3221825	AWG18/25C	17.2	0.677	314	151
<b>AWG 16 (26/30)</b>					
A3221602	AWG16/02C	7.7	0.305	53	16
A3221603	AWG16/03C	8.2	0.321	66	24
A3221604	AWG16/04C	8.7	0.347	77	32
A3221605	AWG16/05C	9.5	0.377	98	40
A3221607	AWG16/07C	10.2	0.406	122	57
A3221609	AWG16/09C	12.0	0.471	159	73
A3221612	AWG16/12C	13.4	0.527	196	98
A3221618	AWG16/18C	16.4	0.647	294	147
A3221625	AWG16/25C	19.0	0.748	391	204
<b>AWG 14 (41/30)</b>					
A3221403	AWG14/03C	8.8	0.348	87	38
A3221404	AWG14/04C	9.6	0.378	108	51
A3221405	AWG14/05C	10.4	0.410	125	64
A3221407	AWG14/07C	11.3	0.445	164	89
A3221412	AWG14/12C	15.5	0.610	283	154
<b>AWG 12 (65/30)</b>					
A3221203	AWG12/03C	9.8	0.382	122	63
A3221204	AWG12/04C	11.1	0.437	150	84
A3221205	AWG12/05C	12.1	0.475	183	105
A3221207	AWG12/07C	14.1	0.556	255	147
<b>AWG 10 (105/30)</b>					
A3221004	AWG10/04C	14.6	0.573	239	130
<b>AWG 8 (168/30)</b>					
A3220804	AWG8/04C	18.9	0.744	398	214
<b>AWG 6 (266/30)</b>					
A3220604	AWG6/04C	21.7	0.853	535	339



# LUTZE SILFLEX® Tray-ER TPE, Unshielded

## Flexible Premium TPE Tray Cable with UL/TC-ER/WTTC/MTW/CE Approvals



### Application

- Multi-conductor cable for tray applications, with **exposed run** (open wiring) approval
- Compliant with **NFPA 79** for machine tool wiring
- **TC-ER** for use with cable trays **without conduit**, which can reduce material and labor costs
- Metal cutting equipment, machine tools, machine and plant construction, HVAC technology, assembly and production lines, and other industrial applications
- WTTC – wind turbine tray cable rating for use in wind power generation
- Dry, damp and wet locations

### Characteristics

- Flexible design with Nylon for crush impact resistance per UL 1277 and easy installation
- Specially formulated TPE jacket for superior oil resistance
- Cutting oil resistant - mineral & bio/vegetable based oils *specifically tested with plant based cutting oil*
- Non-wicking fillers
- Sunlight resistant
- Direct burial
- UL Type TC-Exposed Run
- Talc and Silicone free

### Technical Data

Voltage	600V UL TC-ER 90C 600V UL MTW 90C 1000V WTTC 90C 600V UL AWM 105C
Temperature	-40°C - +90°C static
Minimum bending radius	4 x cable OD
Conductor marking	Black with white numbers and one green/yellow ground
Oil resistance	*2C no ground included Oil Res I and Oil Res II
Approvals	UL Type TC-ER *2C UL Type TC UL/CE UL AWM Style 21270 (UL) Type MTW or DP-1 WTTC Class I, II Div. 2 per NEC Art. 336, 392, 501, 502 c(UL) TC CIC FT4 UL1277 RoHS REACH UL509 BUS Drop (only items with 3 or 4 circuit conductors, plus ground)

### Construction

- AWG conductor
- Flexible fine wire stranded bare copper conductors
- PVC/Nylon insulation / THHN – THWN
- Extremely oil resistant TPE jacket
- Black jacket, similar to RAL 9005

Part No.	Description No. of conductors incl. ground	OD / Ø ca. mm	OD / Ø inches	Weight Lbs/Mft	Copper Lbs/Mft
<b>AWG 18 (16/30)</b>					
A3321802	AWG18/02C*	6.8	0.266	44	10
A3321803	AWG18/03C	7.2	0.284	56	15
A3321804	AWG18/04C	7.6	0.300	67	21
A3321805	AWG18/05C	8.4	0.331	79	25
A3321807	AWG18/07C	9.1	0.356	95	35
A3321812	AWG18/12C	11.6	0.456	148	60
A3321818	AWG18/18C	14.2	0.558	217	90
A3321825	AWG18/25C	16.1	0.634	288	129
<b>AWG 16 (26/30)</b>					
A3321602	AWG16/02C*	7.5	0.296	59	17
A3321603	AWG16/03C	7.9	0.312	72	25
A3321604	AWG16/04C	8.4	0.331	85	33
A3321605	AWG16/05C	9.3	0.365	100	41
A3321607	AWG16/07C	10.0	0.395	125	58
A3321612	AWG16/12C	13.7	0.540	214	100
A3321618	AWG16/18C	15.8	0.623	300	150
A3321625	AWG16/25C	18.1	0.711	396	208
<b>AWG 14 (41/30)</b>					
A3321403	AWG14/03C	8.6	0.340	92	39
A3321404	AWG14/04C	9.4	0.368	108	52
A3321405	AWG14/05C	10.0	0.395	127	65
A3321407	AWG14/07C	11.0	0.434	167	92
A3321412	AWG14/12C	15.0	0.589	287	158
<b>AWG 12 (65/30)</b>					
A3321203	AWG12/03C	9.8	0.385	119	62
A3321204	AWG12/04C	10.5	0.413	146	83
A3321205	AWG12/05C	11.6	0.457	182	104
A3321207	AWG12/07C	12.6	0.497	238	145
<b>AWG 10 (105/30)</b>					
A3321003	AWG10/03C	11.7	0.461	178	100
A3321004	AWG10/04C	12.7	0.498	221	134
A3321005	AWG10/05C	14.8	0.582	285	167
<b>AWG 8 (168/30)</b>					
A3320804	AWG8/04C	18.1	0.711	392	214
<b>AWG 6 (266/30)</b>					
A3320604	AWG6/04C	20.1	0.790	552	339
<b>AWG 4 (413/30)</b>					
A3320404	AWG4/4C	26.3	1.033	910	516
<b>AWG 2 (665/30)</b>					
A3320204	AWG2/04C	30.8	1.214	1,391	883
<b>1/0 (1064/30)</b>					
A3321/004	1/0/4C	36.4	1.435	1,871	1,338
<b>2/0 (1330/30)</b>					
A3322/004	2/0/4C	39.2	1.544	2,257	1,685
<b>3/0 (1665/30)</b>					
A3323/004	3/0/4C	45.6	1.794	2,982	2,156
<b>4/0 (2109/30)</b>					
A3324/004	4/0/4C	48.3	1.903	3,549	2,676

Specifications are subject to change without prior notice


1-800-447-2371



www.lutze.com

# LUTZE SILFLEX® (C) Tray-ER TPE, Shielded

Flexible Shielded Premium TPE Tray Cable with UL/TC-ER/WTTC/MTW/CE Approvals

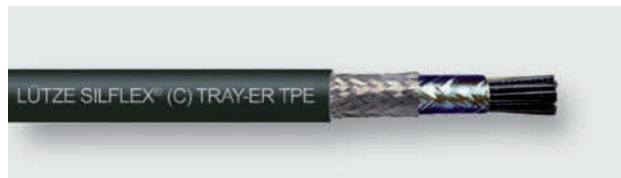

## Application

- Shielded multi-conductor cable for tray applications, with **exposed run** (open wiring) approval
- Compliant with **NFPA 79** for machine tool wiring
- **TC-ER** for use with cable trays **without conduit**, which can reduce material and labor costs
- Metal cutting equipment, machine tools, machine and plant construction, HVAC technology, assembly and production lines, and other industrial applications
- WTTC – wind turbine tray cable rating for use in wind power generation
- Dry, damp and wet locations

## Characteristics

- Flexible design with Nylon for crush impact resistance per UL 1277 and easy installation
- Specially formulated TPE jacket for superior oil resistance
- Cutting oil resistant - mineral & bio/vegetable based oils *specifically tested with plant based cutting oil*
- Non-wicking fillers
- Sunlight resistant
- Direct burial
- UL Type TC-Exposed Run
- Talc and Silicone free

## Technical Data

Voltage	600V UL TC-ER 90C 600V UL MTW 90C 1000V WTTC 90C 600V UL AWM 105C
Temperature	-40°C - +90°C static
Bending radius	6 x cable OD
Conductor marking	Black with white numbers and one green/yellow ground
Oil resistance	Oil Res I and Oil Res II
Approvals	UL Type TC-ER UL/CE UL AWM Style 21270 (UL) Type MTW or DP-1 WTTC Class I, II Div. 2 per NEC Art. 336, 392, 501, 502 c(UL) TC CIC FT4 UL1277 RoHS REACH

## Construction

- AWG conductor
- Flexible fine wire stranded bare copper conductors
- PVC/Nylon insulation / THHN – THWN
- Shielded with foil tape, tinned copper braid and drain wire
- Extremely oil resistant TPE jacket
- Black jacket RAL 9005

Specifications are subject to change without prior notice

Part No.	Description No. of conductors incl. ground	OD / Ø ca. mm	OD / Ø inches	Weight Lbs/Mft	Copper Lbs/Mft
<b>AWG 18 (16/30)</b>					
A3311803	AWG18/03C	7.8	0.307	76	27
A3311804	AWG18/04C	8.2	0.323	87	36
A3311805	AWG18/05C	9.0	0.354	99	42
A3311807	AWG18/07C	9.6	0.379	116	54
A3311812	AWG18/12C	12.2	0.479	176	85
A3311818	AWG18/18C	14.9	0.588	264	127
A3311825	AWG18/25C	17.3	0.681	368	194
<b>AWG 16 (26/30)</b>					
A3311603	AWG16/03C	8.5	0.335	92	41
A3311604	AWG16/04C	9.0	0.354	106	51
A3311605	AWG16/05C	9.9	0.389	121	61
A3311607	AWG16/07C	10.6	0.418	149	80
A3311612	AWG16/12C	14.5	0.569	254	134
A3311618	AWG16/18C	16.6	0.655	353	191
A3311625	AWG16/25C	18.8	0.740	462	256
<b>AWG 14 (41/30)</b>					
A3311403	AWG14/03C	9.2	0.363	113	59
A3311404	AWG14/04C	9.9	0.391	133	74
A3311405	AWG14/05C	10.6	0.418	154	89
A3311407	AWG14/07C	11.6	0.457	200	117
A3311412	AWG14/12C	15.8	0.620	339	201
<b>AWG 12 (65/30)</b>					
A3311203	AWG12/03C	10.4	0.409	148	88
A3311204	AWG12/04C	11.1	0.437	179	111
A3311205	AWG12/05C	12.2	0.480	216	134
<b>AWG 10 (105/30)</b>					
A3311004	AWG10/04C	14.4	0.565	291	178

# LUTZE SILFLEX® Tray-ER Blue PVC, Unshielded

## Flexible Control and Tray Cable with UL/TC-ER/MTW/CE Approvals, Blue Conductors for 24V Applications



### Application

- Multi-conductor cable for tray applications, with **exposed run** (open wiring) approval
- Machine tools, machine and plant construction, HVAC technology, assembly and production lines, and other industrial applications
- **Blue conductors indicating** 24 Volt circuits
- MTW rating as required per **NFPA 79** for machine tool wiring
- TC-ER for use on machines and in cable trays without conduit
- Dry, damp and wet conditions

### Characteristics

- Flexible design with Nylon for crush impact resistance per UL 1277 and easy installation
- Specially formulated jacket for oil resistance
- Non-wicking fillers
- Sunlight resistant
- Direct burial
- UL Type TC-Exposed Run
- Talc and Silicone free

### Technical Data

Voltage	600V UL TC-ER 600V UL AWM
Temperature	-40°C - +90°C static
Bending radius	4 x cable OD
Conductor marking	Blue with white numbers; and one green/yellow ground; No. 2 is white with a blue stripe * only two blue with white numbers and one green/yellow ground, no white with a blue stripe
Oil resistance	Oil Res I
Approvals	UL Type TC-ER UL/CE UL AWM (UL) Type MTW or DP-1 Class I, II Div. 2 per NEC Art. 336, 392, 501, 502 c(UL) CIC TC, FT4 UL1277 RoHS REACH

### Construction

- AWG conductor
- Flexible fine wire stranded bare copper conductors
- PVC/Nylon insulation / THHN – THWN
- Oil resistant PVC jacket
- Gray jacket, similar to RAL 7001

Specifications are subject to change without prior notice

Part No.	Description No. of conductors incl. ground	OD / Ø ca. mm	OD / Ø inches	Weight Lbs/Mft	Copper Lbs/Mft
<b>AWG 18 (19/30)</b>					
A3251803	AWG18/3C*	7.3	0.288	47	18
A3251805	AWG18/5C	8.6	0.337	69	30
A3251807	AWG18/7C	9.4	0.370	89	42
A3251812	AWG18/12C	12.0	0.474	143	72
A3251819	AWG18/19C	14.9	0.588	219	108
A3251825	AWG18/25C	17.4	0.686	295	150
A3251837	AWG18/37C	19.9	0.782	410	223
<b>AWG 16 (26/30)</b>					
A3251603	AWG16/3C*	7.9	0.312	58	25
A3251605	AWG16/5C	9.2	0.364	91	41
A3251607	AWG16/7C	10.1	0.398	116	57
A3251612	AWG16/12C	13.9	0.547	194	98
A3251619	AWG16/19C	16.2	0.638	271	155
A3251625	AWG16/25C	18.9	0.746	379	204
<b>AWG 14 (41/30)</b>					
A3251403	AWG14/3C	8.9	0.352	82	39
A3251404	AWG14/4C	9.8	0.384	103	52
<b>AWG 12 (65/30)</b>					
A3251204	AWG12/4C	10.9	0.428	137	85

"Blue conductors are used to indicate 24V DC circuits. However the cable is rated 600V TC-ER in order to be installed alongside other type TC cables".





# LUTZE SILFLEX® N PVC, Unshielded

## Flexible Control Cable with UL/CE Approvals



### Application

- Multi-conductor control cable for machine and plant construction, HVAC technology, assembly and production lines, and many other industrial applications
- Easy strip design specially suited for cable assemblies

### Characteristics

- Most flexible design without Nylon for easy stripping and easy installation
- Easy routing and bending due to flexibility
- Specially formulated gray PVC jacket for oil resistance
- Resistant to mineral oils, coolants and solvents
- Non-wicking fillers
- Talc and Silicone free

### Technical Data

Voltage	600V UL AWM
Temperature	-40°C - +90°C static
Minimum bending radius	4 x cable OD
Conductor marking	Black with white numbers and one green/yellow ground; *2C no ground included
Burning behavior	Flame retardant per UL-VW-1
Oil resistance	Oil Res II
Approvals	UL AWM Style 2587 FT4 CE RoHS REACH

### Construction

- AWG conductor
- Flexible fine wire stranded bare copper conductors
- PVC insulation
- Oil resistant PVC jacket
- Gray jacket, similar to RAL 7001

Specifications are subject to change without prior notice

Part No.	Description No. of conductors incl. ground	OD / Ø ca. mm	OD / Ø inches	Weight Lbs/Mft	Copper Lbs/Mft
<b>AWG 20 (10/30)</b>					
108349A	AWG20/02C*	5.7	0.226	27	6.5
108350A	AWG20/03C	6.0	0.235	31	10
108351A	AWG20/04C	6.5	0.255	38	12
108352A	AWG20/05C	7.2	0.282	46	16
108353A	AWG20/07C	8.8	0.345	65	22
108354A	AWG20/12C	10.8	0.424	103	38
108355A	AWG20/18C	12.8	0.505	153	56
108356A	AWG20/25C	15.0	0.592	206	88
<b>AWG 18 (16/30)</b>					
108401A	AWG18/02C*	6.5	0.254	34	10
108357A	AWG18/03C	6.7	0.263	41	15
108358A	AWG18/04C	7.2	0.285	51	20
108359A	AWG18/05C	7.7	0.305	63	25
108360A	AWG18/07C	9.1	0.360	82	35
108392A	AWG18/09C	11.7	0.460	119	45
108361A	AWG18/12C	12.0	0.473	142	60
108362A	AWG18/18C	13.8	0.543	198	90
108363A	AWG18/25C	16.0	0.630	263	125
<b>AWG 16 (26/30)</b>					
108391A	AWG16/02*	6.9	0.270	41	16
108372A	AWG16/03	7.4	0.290	55	24
108373A	AWG16/04	8.0	0.316	69	32
108374A	AWG16/05	8.7	0.341	84	40
108375A	AWG16/07	10.3	0.406	112	57
108393A	AWG16/09	13.0	0.511	159	73
108376A	AWG16/12	13.8	0.543	198	97
108377A	AWG16/18	15.5	0.610	274	147
108378A	AWG16/25	18.0	0.708	366	204
<b>AWG 14 (41/30)</b>					
108380A	AWG14/03	8.9	0.352	82	38
108381A	AWG14/04	9.8	0.384	103	51
108382A	AWG14/05	10.9	0.430	130	63
108383A	AWG14/07	13.4	0.529	183	89
108389A	AWG14/09	16.3	0.642	246	115
108384A	AWG14/12	16.9	0.665	307	153
108385A	AWG14/18	19.7	0.774	433	230
108386A	AWG14/25	23.7	0.935	598	320

# LUTZE Single Conductor Hook Up Wire, Multi-Norm

## Flexible Single Conductor Hook Up Wire with UL/CE/MTW and HAR Approvals



RoHS

### Application

- Multi-rated single-conductor cable for wiring of cabinets and use in electrical and electronic equipment
- Specially suited for use in Europe (HAR) and North America (UL MTW)
- MTW rating compliant with **NFPA 79** for machine tool wiring

### Characteristics

- Fine stranding class 5, per VDE 0295
- Very flexible for easy installation
- Talc and Silicone free

### Technical Data

Nominal voltage	H05V2-K 300/500V, H07V2-K 450/750V, UL 600V, style 1015
Test voltage	3000V
Bending radius	Fixed: 5 x cable OD
Temperature	Flexible -5°C - +105°C Fixed -40°C - + 105°C H05/H07 up to +90°C
Conductor stranding	Fine wire, tinned copper per VDE 0295 class 5, IEC 60228 class 5
Insulation resistance	20MΩ x km
Burning behavior	Flame retardant per UL VW-1, IEC 60332-1
Approvals	HAR: HD 21.3 S3 - H05V-K (≤ AWG 18) - H07V-K (≥ AWG 16) UL 1063 MTW Listed UL AWM 1015 RoHS REACH
Put ups	<b>AWG 19 – AWG 12</b> 100m (328 ft) carton or ring 500m (1,640 ft) reel upon request <b>AWG 10 and larger</b> Cuts of any length up to 1,000m (3,280ft) reel

### Construction

- Metric conductor
- Flexible stranded tinned copper conductors
- PVC insulation according to UL 1581, class 43 heat and humidity resistant
- Conditionally resistant to oils, solvents, acids and bases


Part No.	Description Color	OD / Ø ca. mm	OD / Ø inches	Weight Lbs/Mft	Copper Lbs/Mft
<b>AWG 19 / 0.75 mm<sup>2</sup></b>					
<b>H05V2-K</b>					
A61900	Green/Yellow	2.7	0.106	9	5
A61901	Black	2.7	0.106	9	5
A61902	Blue	2.7	0.106	9	5
A61903	Brown	2.7	0.106	9	5
A61904	Red	2.7	0.106	9	5
A61914	Dark Blue	2.7	0.106	9	5
<b>AWG 18 / 1.0 mm<sup>2</sup></b>					
<b>H05V2-K</b>					
A61800	Green/Yellow	2.9	0.114	10	6
A61801	Black	2.9	0.114	10	6
A61802	Blue	2.9	0.114	10	6
A61803	Brown	2.9	0.114	10	6
A61804	Red	2.9	0.114	10	6
A61814	Dark Blue	2.9	0.114	10	6
A61844	White/Blue	2.9	0.114	10	6
<b>AWG 16 / 1.5 mm<sup>2</sup></b>					
<b>H07V2-K</b>					
A61600	Green/Yellow	3.3	0.130	14	10
A61601	Black	3.3	0.130	14	10
A61602	Blue	3.3	0.130	14	10
A61603	Brown	3.3	0.130	14	10
A61604	Red	3.3	0.130	14	10
A61605	White	3.3	0.130	14	10
A61614	Dark Blue	3.3	0.130	14	10
A61615	Blue/White	3.3	0.130	14	10
A61644	White/Blue	3.3	0.130	14	10
<b>AWG 14 / 2.5 mm<sup>2</sup></b>					
<b>H07V2-K</b>					
A61400	Green/Yellow	3.7	0.145	21	16
A61401	Black	3.7	0.145	21	16
A61402	Blue	3.7	0.145	21	16
A61403	Brown	3.7	0.145	21	16
A61404	Red	3.7	0.145	21	16
A61405	White	3.7	0.145	21	16
A61414	Dark Blue	3.7	0.145	21	16
<b>AWG 12 / 4.0 mm<sup>2</sup></b>					
<b>H07V2-K</b>					
A61200	Green/Yellow	4.3	0.169	31	25
A61201	Black	4.3	0.169	31	25
<b>AWG 10/ 6.0 mm<sup>2</sup></b>					
<b>H07V2-K</b>					
A61000	Green/Yellow	4.8	0.189	44	39
A61001	Black	4.8	0.189	44	39
<b>AWG 8 / 10 mm<sup>2</sup></b>					
<b>H07V2-K</b>					
A60800	Green/Yellow	6.8	0.267	76	64
A60801	Black	6.8	0.267	76	64

More colors and sizes upon request. Please call us for information!

Specifications are subject to change without prior notice

# LUTZE Single Conductor Hook Up Wire, Multi-Norm

## Flexible Single Conductor Hook Up Wire with UL/CE/MTW and HAR Approvals

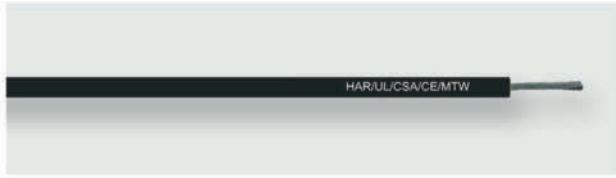

### Application

- Multi-rated single-conductor cable for wiring of cabinets and use in electrical and electronic equipment
- Specially suited for use in Europe (HAR) and North America (UL MTW)
- MTW rating compliant with **NFPA 79** for machine tool wiring

### Characteristics

- Fine stranding class 5, per VDE 0295
- Very flexible for easy installation
- MTW rated
- Talc and Silicone free

### Technical Data

Nominal voltage	H05V2-K 300/500 V, H07V2-K 450/750 V, UL 600V, style 1015
Test voltage	3000V
Bending radius	Fixed: 5 x cable OD
Temperature	Flexible -5°C - +105°C Fixed -40°C - +105°C H05/H07 up to +90°C
Conductor stranding	Fine wire, tinned copper per VDE 0295 class 5, IEC 60228 class 5
Insulation resistance	20MΩ x km
Burning behavior	Flame retardant per UL VW-1, IEC 60332-1
Approvals	HAR: HD 21.3 S3 - H05V-K (≤ AWG 18) - H07V-K (≥ AWG 16) UL 1063 MTW Listed UL AWM 1015 RoHS REACH
Put ups	<b>AWG 19 – AWG 12</b> 100m (328 ft) carton or ring 500m (1,640 ft) reel upon request <b>AWG 10 and larger</b> Cuts of any length up to 1,000m (3,280ft) reel

Part No.	Description Color	OD / Ø ca. mm	OD / Ø inches	Weight Lbs/Mft	Copper Lbs/Mft
<b>AWG 6 / 16 mm<sup>2</sup></b>					
<b>X07V2-K</b>					
<b>A60600</b>	Green/Yellow	8.6	0.338	126	103
<b>A60601</b>	Black	8.6	0.338	126	103
<b>AWG 4 / 25 mm<sup>2</sup></b>					
<b>H07V2-K</b>					
<b>A60400</b>	Green/Yellow	10.0	0.394	180	161
<b>A60401</b>	Black	10.0	0.394	180	161
<b>AWG 2 / 35 mm<sup>2</sup></b>					
<b>H07V2-K</b>					
<b>A60200</b>	Green/Yellow	11.0	0.433	247	225
<b>A60201</b>	Black	11.0	0.433	247	225
<b>AWG 1 / 50 mm<sup>2</sup></b>					
<b>X07V2-K</b>					
<b>A60100</b>	Green/Yellow	14.0	0.551	347	322
<b>A60101</b>	Black	14.0	0.551	347	322
<b>AWG 2/0 / 70 mm<sup>2</sup></b>					
<b>X07V2-K</b>					
<b>A67000</b>	Green/Yellow	15.6	0.614	475	452
<b>A67001</b>	Black	15.6	0.614	475	452
<b>AWG 3/0 / 95 mm<sup>2</sup></b>					
<b>X07V2-K</b>					
<b>A69500</b>	Green/Yellow	17.8	0.701	629	613
<b>A69501</b>	Black	17.8	0.701	629	613

### Construction

- Metric conductor
- Flexible stranded tinned copper conductors
- PVC insulation according to UL 1581, class 43 heat and humidity resistant
- Conditionally resistant to oils, solvents, acids and bases

More colors and sizes upon request. Please call us for information!

Specifications are subject to change without prior notice



# LUTZE SUPERFLEX® N PVC, Unshielded

## High Flexing Control Cable with UL/CE Approvals



### Application

- Suitable for control, monitoring and instrumentation applications with continuous flexing cycles
- For flexing applications such as C-tracks and other applications where linear flexing occurs
- Compatible with all major brand C-tracks
- High performance linear flexing cable, compliant with **NFPA 79, 2012 Edition** Article 12.9 special cables and conductors

### Characteristics

- Extremely small cable ODs due to special **TPE High Glide Insulation** compliant with UL
- TPE/PVC combination for high performance flexing and longer cable runs
- Very flexible with superfine stranding
- Specially formulated PVC jacket per UL Class 43
- Non-wicking fillers
- Abrasion, high wear and tear resistance
- Hydrolysis, microbe and decompose resistant
- UV resistant per EN ISO 4892-2-A
- Dry and wet conditions
- Talc and Silicone free

### Technical Data

Voltage	600V UL AWM
Test voltage	3000V
Insulation resistance	Min 100 MΩ x km
Temperature	Moving -5°C - +80°C Fixed -40°C - +80°C
Minimum Bending radius	Moving 7.5 x cable OD Fixed 4 x cable OD
Conductor marking	Black with white numbers and one green/yellow ground
Burning behavior	Flame retardant per UL VW-1, DIN EN 60332-1-2
Oil resistance	4D100C, UL Oil res 80°C and DIN EN 60811-404
Approvals	cUL AWM Style 20207 FT1 CE RoHS REACH

### Construction


- Metric conductor
- Bare copper super finely stranded per DIN VDE 0295 Class 6 and IEC 60228 Class 6
- Special TPE conductor insulation
- G: with GNYE ground conductor  
x: without ground conductor
- Optimized construction for flexing applications
- Conductors cabled with fleece wrap
- Special high strength PVC Jacket per UL class 43 / VDE 0207 TM5, oil resistant
- Gray jacket, similar to RAL 7001

Part No.	Description No. of conductors incl. ground	OD / Ø ca. mm	OD / Ø inches	Weight Lbs/Mft	Copper Lbs/Mft
<b>AWG 21 / 0.5 mm<sup>2</sup></b>					
<b>A1382003</b>	3G0.5	5.7	0.224	30	10
<b>A1382004</b>	4G0.5	6.1	0.240	36	13
<b>A1382005</b>	5G0.5	6.7	0.264	42	16
<b>A1382007</b>	7G0.5	7.7	0.303	53	23
<b>A1382012</b>	12G0.5	9.3	0.366	78	39
<b>A1382018</b>	18G0.5	10.7	0.421	109	59
<b>A1382025</b>	25G0.5	12.5	0.492	146	82
<b>AWG 18 / 1.0 mm<sup>2</sup></b>					
<b>A1381803</b>	3G1.0	6.6	0.260	44	20
<b>A1381804</b>	4G1.0	7.2	0.283	54	27
<b>A1381805</b>	5G1.0	7.8	0.307	64	33
<b>A1381807</b>	7G1.0	9.1	0.358	83	46
<b>A1381812</b>	12G1.0	10.8	0.425	127	80
<b>A1381818</b>	18G1.0	12.7	0.500	179	120
<b>A1381825</b>	25G1.0	15.1	0.594	243	166
<b>A1381834</b>	34G1.0	17.8	0.701	318	226
<b>A1381841</b>	41G1.0	19.0	0.750	325	274
<b>A1381850</b>	50G1.0	21.3	0.839	332	335
<b>AWG 16 / 1.5 mm<sup>2</sup></b>					
<b>A1381603</b>	3G1.5	7.2	0.283	58	30
<b>A1381604</b>	4G1.5	7.8	0.307	71	40
<b>A1381605</b>	5G1.5	8.6	0.339	84	49
<b>A1381607</b>	7G1.5	10.1	0.398	111	69
<b>A1381612</b>	12G1.5	12.4	0.488	173	119
<b>A1381618</b>	18G1.5	14.5	0.571	246	178
<b>A1381625</b>	25G1.5	16.8	0.661	336	231
<b>AWG 14 / 2.5 mm<sup>2</sup></b>					
<b>A1381404</b>	4G2.5	9.1	0.358	107	65
<b>A1381405</b>	5G2.5	10.0	0.394	127	82
<b>A1381407</b>	7G2.5	12.1	0.476	170	115
<b>AWG 12 / 4 mm<sup>2</sup></b>					
<b>A1381204</b>	4G4	10.7	0.421	154	105
<b>A1381207</b>	7G4	14.0	0.551	253	183

Specifications are subject to change without prior notice

# LUTZE SUPERFLEX® N (C) PVC, Shielded

## High Flexing Control Cable with UL/CE Approvals

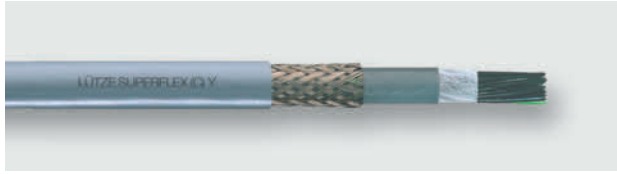

### Application

- Braid shielded, multi-conductor high flexing cable suitable for control, monitoring and instrumentation applications with continuous flexing in C-track
- Machine tools, gantry robots, conveyors and other continuous motion applications in industrial environments
- For flexing applications such as C-tracks and other applications where linear flexing occurs
- Compatible with all major brand C-tracks
- High performance linear flexing cable, compliant with **NFPA 79, 2012 Edition** Article 12.9 special cables and conductors

### Characteristics

- Extremely small cable ODs due to special **TPE High Glide Insulation** compliant with UL
- Sub-Jacket for increased flex life in high performance flexing and long cable runs
- Very flexible with superfine stranding
- Specially formulated PVC jacket per UL Class 43
- Non-wicking fillers
- Abrasion, high wear and tear resistance
- Hydrolysis, microbe and decompose resistant
- UV resistant per EN ISO 4892-2-A
- Dry and wet conditions
- Talc and Silicone free

### Technical Data

Voltage	600V UL AWM
Test voltage	3000V
Insulation resistance	Min 100MΩ x km
Temperature	Moving -5°C - +80°C Fixed -40°C - +80°C
Minimum Bending radius	Moving 10 x cable OD Fixed 6 x cable OD
Conductor marking	Black with white numbers and one green/yellow ground
Burning behavior	Flame retardant per UL VW-1, DIN EN 60332-1-2 FT1
Oil resistance	4D100C, UL Oil res 80°C and DIN EN 60811-404
Approvals	cUL AWM Style 2570 CE RoHS REACH

### Construction


- Metric conductor
- Bare copper super finely stranded per DIN VDE 0295 Class 6 and IEC 60228 Class 6
- Special TPE conductor insulation
- G: with GNYE ground conductor  
x: without ground conductor
- Optimized construction for flexing applications
- Conductors cabled with fleece wrap
- PVC Sub-Jacket
- Tinned copper braid shield
- Special high strength PVC Jacket per UL class 43 / VDE 0207 TM5, oil resistant
- Gray jacket similar to RAL 7001

Specifications are subject to change without prior notice

Part No.	Description No. of conductors incl. ground	OD / Ø ca. mm	OD / Ø inches	Weight Lbs/Mft	Copper Lbs/Mft
<b>AWG 21 / 0.5 mm<sup>2</sup></b>					
A1392003	(3G0.5)	7.4	0.292	54	21
A1392004	(4G0.5)	7.8	0.307	60	25
A1392005	(5G0.5)	8.5	0.333	71	29
A1392007	(7G0.5)	9.7	0.382	94	43
A1392012	(12G0.5)	11.3	0.444	129	64
A1392018	(18G0.5)	13.1	0.516	176	93
A1392025	(25G0.5)	15.1	0.593	202	119
<b>AWG 18 / 1.0 mm<sup>2</sup></b>					
A1391803	(3G1.0)	8.2	0.323	71	32
A1391804	(4G1.0)	8.8	0.347	83	40
A1391805	(5G1.0)	9.6	0.378	103	54
A1391807	(7G1.0)	11	0.431	133	70
A1391812	(12G1.0)	13	0.512	189	110
A1391818	(18G1.0)	14.9	0.587	260	161
A1391825	(25G1.0)	17.6	0.691	318	224
A1391834	(34G1.0)	19.4	0.765	399	291
<b>AWG 16 / 1.5 mm<sup>2</sup></b>					
A1391603	(3G1.5)	8.8	0.346	88	44
A1391604	(4G1.5)	9.6	0.378	109	60
A1391605	(5G1.5)	10.4	0.411	128	72
A1391607	(7G1.5)	11.9	0.469	165	95
A1391612	(12G1.5)	14.1	0.556	239	151
A1391618	(18G1.5)	16.2	0.638	336	224
A1391625	(25G1.5)	19.4	0.764	431	312
<b>AWG 14 / 2.5 mm<sup>2</sup></b>					
A1391404	(4G2.5)	11	0.433	155	90
A1391405	(5G2.5)	11.9	0.469	179	109
A1391407	(7G2.5)	13.6	0.537	216	143
<b>AWG 12 / 4 mm<sup>2</sup></b>					
A1391204	(4G4)	12.6	0.496	214	135
A1391207	(7G4)	15.9	0.626	312	222

# LUTZE SUPERFLEX® Plus N PUR, Unshielded

## High Flexing Control Cable with UL/CE Approvals

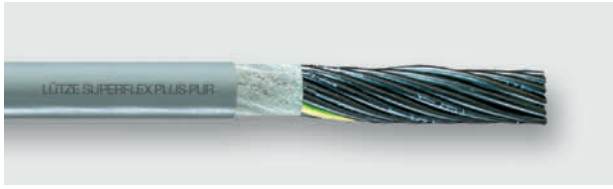

### Application

- Multi-conductor cable for robots, handling equipment, machine tools, C-tracks and applications with extremely rough operating conditions
- For the most demanding flexing applications such as C-tracks and linear flexing
- Compatible with all major brand C-tracks
- High performance linear flexing cable, compliant with **NFPA 79, 2012 Edition** Article 12.9 special cables and conductors

### Characteristics

- Superfine stranding per Class 6 for continuous moving applications
- Extremely small cable ODs due to special **TPE High Glide Insulation** compliant with UL
- Reduced friction
- PUR jacket
- Highest level of resistance against cooling fluids, greases and oils
- Abrasion and hydrolysis resistant, low water absorption
- Dry and wet conditions
- UV resistant
- Non-wicking fillers
- Talc and Silicone free

### Technical Data

Voltage	300/600V UL AWM
Temperature	Moving -25°C - +80°C Fixed -40°C - +80°C
Minimum Bending radius	Moving 7.5 x cable OD Fixed 4 x cable OD
Conductor marking	Black with white numbers and one green/yellow ground; *no ground included
Isolation resistance	Min 100MΩ x km
Burning behavior	Flame retardant per DIN EN 60332-1-2 IEC 60332-1 UL VW-1 Flame test FT 1
Halogen free	According to DIN EN 60754-1
Oil resistance	Oil Res II
Approvals	RoHS REACH

### Construction

- Metric conductor
- Bare copper wire super finely stranded per DIN VDE 0295 Class 6 and IEC 60228 Class 6
- Special TPE conductor insulation
- G: with GNYE ground conductor  
x: without ground conductor
- Optimized construction for flexing applications
- Conductors cabled with fleece wrap
- Extremely oil resistant PUR jacket
- Gray jacket RAL 7001

Specifications are subject to change without prior notice

1-800-447-2371



www.lutze.com

Part No.	Description No. of conductors incl. ground	OD / Ø ca. mm	OD / Ø inches	Weight Lbs/Mft	Copper Lbs/Mft
----------	--	------------------	------------------	-------------------	-------------------

### 300V UL AWM Style 20233

AWG 21 / 0.5 mm <sup>2</sup>					
113431	2x0.5*	4.8	0.189	19	7
113441	3G0.5	5.0	0.197	24	10
113442	4G0.5	5.4	0.213	28	13
113443	5G0.5	5.8	0.228	32	16
113444	7G0.5	6.7	0.264	43	23
113446	12G0.5	8.0	0.315	65	40
113438	18G0.5	9.3	0.366	91	59
113447	25G0.5	11.0	0.433	122	82
AWG 18 / 1.0 mm <sup>2</sup>					
113484	2x1.0*	5.6	0.220	31.5	13
113400	3G1.0	5.9	0.232	33.5	20
113433	4G1.0	6.4	0.252	48.2	27
113401	5G1.0	7.0	0.276	57.0	34
113402	7G1.0	8.2	0.323	77.1	46
113403	12G1.0	9.8	0.386	120.6	80
113404	18G1.0	11.4	0.449	180.9	119
113405	25G1.0	13.6	0.535	227.1	166


### 600V UL AWM Style 20234

AWG 18 / 1.0 mm <sup>2</sup>					
113570	2x1.0*	7.1	0.280	40	13
113571	3G1.0	7.4	0.291	48	20
113572	4G1.0	8.0	0.315	57	27
113573	5G1.0	8.7	0.343	68	34
113574	7G1.0	10.0	0.394	89	46
113575	12G1.0	12.0	0.472	135	80
113576	18G1.0	13.8	0.543	189	120
113577	25G1.0	16.4	0.646	255	167
AWG 16 / 1.5 mm <sup>2</sup>					
113485	2x1.5*	7.7	0.303	52	19
113406	3G1.5	8.0	0.315	62	30
113412	4G1.5	8.8	0.346	76	40
113407	5G1.5	9.5	0.374	89	50
113408	7G1.5	11.0	0.433	118	69
113409	12G1.5	13.2	0.520	180	118
113410	18G1.5	15.3	0.602	255	178
113411	25G1.5	18.2	0.717	346	247
AWG 14 / 2.5 mm <sup>2</sup>					
113483	3G2.5	9.2	0.362	89	49
113415	4G2.5	10.0	0.394	109	66
113416	5G2.5	10.9	0.429	130	82
113417	7G2.5	12.8	0.504	174	114
113426	12G2.5	15.3	0.602	271	192
113479	18G2.5	17.8	0.701	388	294



# LUTZE SUPERFLEX® Plus N (C) PUR, Shielded

## High Flexing Control Cable with UL/CE Approvals

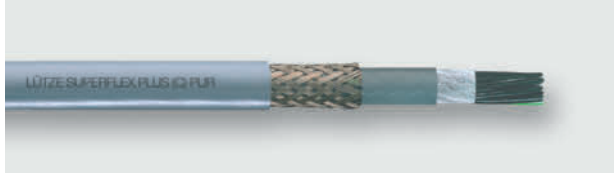

### Application

- Multi-conductor cable for robots, handling equipment, machine tools, C-tracks and applications with extremely rough operating conditions
- For the most demanding flexing applications such as C-tracks and linear flexing
- Compatible with all major brand C-tracks
- High performance linear flexing cable, compliant with **NFPA 79, 2012 Edition** Article 12.9 special cables and conductors

### Characteristics

- Superfine stranding per Class 6 for continuous moving applications
- Extremely small cable ODs due to special **TPE High Glide Insulation** compliant with UL
- Reduced friction
- Highest level of resistance against cooling fluids, greases and oils
- Abrasion and hydrolysis resistant, low water absorption
- Dry and wet conditions
- UV resistant
- Non-wicking fillers
- Talc and Silicone free

### Technical Data

Voltage	300/600V UL AWM
Temperature	Moving -25°C - +80°C
	Fixed -40°C - +80°C
Minimum bending radius	Moving 10 x cable OD
	Fixed 6 x cable OD
Conductor marking	Black with white numbers and one green/yellow ground
Isolation resistance	Min 100MΩ x km
Burning behavior	Flame retardant per
	DIN EN 60332-1-2
	IEC 60332-1, UL VW-1 FT1
Halogen free	According to DIN EN 60754-1
Oil resistance	Oil Res II
Approvals	RoHS
	REACH

### Construction

- Metric conductor
- Bare copper wire super finely stranded per DIN VDE 0295 Class 6 and IEC 60228 Class 6
- Special TPE conductor insulation
- G: with GNYE ground conductor
- x: without ground conductor
- Optimized construction for flexing applications
- Conductors cabled with fleece wrap
- TPE subjacket for long flex life
- Tinned copper braid shield
- Extremely oil resistant PUR jacket
- Gray jacket RAL 7001

Specifications are subject to change without prior notice

Part No.	Description No. of conductors incl. ground	OD / Ø ca. mm	OD / Ø inches	Weight Lbs/Mft	Copper Lbs/Mft
----------	--	------------------	------------------	-------------------	-------------------

### 300V UL AWM Style 20233

AWG 21 / 0.5 mm <sup>2</sup>					
113300	(3G0.5)	6.6	0.260	38	18
113347	(4G0.5)	7.0	0.276	43	22
113301	(5G0.5)	7.5	0.295	49	26
113302	(7G0.5)	8.3	0.327	61	34
113303	(12G0.5)	9.7	0.382	86	53
113304	(18G0.5)	11.0	0.433	120	80
113305	(25G0.5)	12.0	0.472	157	107

AWG 18 / 1.0 mm <sup>2</sup>					
113312	(3G1.0)	7.8	0.307	61.1	30
113324	(4G1.0)	8.3	0.327	71.2	38
113313	(5G1.0)	9.1	0.358	82.0	46
113314	(7G1.0)	10.2	0.402	104.8	61
113315	(12G1.0)	12.1	0.476	161.3	103
113316	(18G1.0)	14.0	0.551	217.7	147
113317	(25G1.0)	15.8	0.622	295.7	204

### 600V UL AWM Style 20234

AWG 18 / 1.0 mm <sup>2</sup>					
113360	(3G1.0)	9.0	0.354	69	32
113361	(4G1.0)	9.6	0.378	80	39
113362	(5G1.0)	10.4	0.409	92	47
113363	(7G1.0)	11.8	0.465	123	68
113364	(12G1.0)	13.8	0.543	175	106
113365	(18G1.0)	15.7	0.618	235	151
113366	(25G1.0)	18.5	0.728	329	223

AWG 16 / 1.5 mm <sup>2</sup>					
113318	(3G1.5)	9.7	0.382	84	42
113331	(4G1.5)	10.5	0.413	99	58
113319	(5G1.5)	11.2	0.441	120	70
113320	(7G1.5)	12.8	0.504	153	93
113321	(12G1.5)	14.9	0.587	222	147
113322	(18G1.5)	17.2	0.677	308	217
113323	(25G1.5)	20.1	0.791	425	310

AWG 14 / 2.5 mm <sup>2</sup>					
113341	(3G2.5)	10.9	0.429	113	64
113332	(4G2.5)	11.8	0.465	142	86
113339	(5G2.5)	12.6	0.496	165	105
113340	(7G2.5)	14.6	0.575	214	142
113344	(12G2.5)	17.4	0.685	325	236
113342	(18G2.5)	19.9	0.783	466	356

## 2. Electronic cables



# LUTZE Electronic PLTC PVC, Unshielded

## Flexible Electronic Cable with UL/CE/PLTC Approvals



### Application

- **Industrial grade PLTC** electronic cable for machine tools, process instrumentation and controls, computer peripherals, HVAC technology, assembly and production lines, low voltage interconnect and other industrial applications including **installation in cable trays**

### Characteristics

- Flexible for easy installation
- Easy strip design
- Color coded conductors
- Specially formulated jacket for oil resistance
- Premium durability
- Extended temperature range
- **UL listed** and **NFPA 79** compliant
- Talc and Silicone free

### Technical Data

Voltage	300V
Temperature	-40°C - +105°C
Minimum bending radius	4 x cable OD
Conductor marking	See tables
Burning behavior	Flame retardant per UL VW-1, FT4
Oil resistance	Oil Res II
Approvals	UL Type PLTC UL Type CM AWM Style 2464 AWM II A/B CE Meets NEC 725, 760, 800 Class I, II Div. 2 per NEC Art. 336, 392, 501, 502 (PLTC use only) RoHS REACH

### Construction

- AWG conductor
- Flexible fine wire stranded tinned copper conductors
- SR-PVC insulation
- Oil resistant premium PVC jacket
- Gray jacket similar to RAL 7001

Specifications are subject to change without prior notice

Part No.	Description No. of conductors	OD / Ø ca. mm	OD / Ø inches	Weight Lbs/Mft	Copper Lbs/Mft
<b>AWG 22 (19/34)</b>					
A3032202	AWG22/2C	4.4	0.173	17	4
A3032203	AWG22/3C	4.6	0.181	21	7
A3032204	AWG22/4C	4.9	0.194	26	9
A3032206	AWG22/6C	5.7	0.223	33	14
A3032208	AWG22/8C	6.2	0.243	42	19
A3032210	AWG22/10C	7.2	0.283	53	24
A3032215	AWG22/15C	8.1	0.318	70	35
A3032220	AWG22/20C	9.0	0.353	90	47
A3032225	AWG22/25C	10.3	0.407	117	59
<b>AWG 20 (19/32)</b>					
A3032002	AWG20/2C	5.0	0.195	21	7
A3032003	AWG20/3C	5.2	0.204	27	11
A3032004	AWG20/4C	5.6	0.220	33	15
A3032006	AWG20/6C	6.5	0.254	45	22
A3032008	AWG20/8C	7.2	0.282	58	30
A3032010	AWG20/10C	8.2	0.323	72	37
A3032015	AWG20/15C	9.2	0.364	99	56
A3032020	AWG20/20C	10.7	0.420	134	75
A3032025	AWG20/25C	11.7	0.461	163	94
<b>AWG 18 (19/30)</b>					
A3031802	AWG18/2C	5.4	0.213	27	12
A3031803	AWG18/3C	5.7	0.223	35	18
A3031804	AWG18/4C	6.1	0.242	43	24
A3031806	AWG18/6C	7.4	0.291	63	36
A3031808	AWG18/8C	7.9	0.312	79	49
A3031810	AWG18/10C	9.1	0.359	97	61
A3031815	AWG18/15C	10.8	0.427	145	91
A3031820	AWG18/20C	11.9	0.468	185	121
A3031825	AWG18/25C	13.1	0.515	226	152
<b>AWG16 (26/30)</b>					
A3031602	AWG16/2C	6.5	0.257	36	16
A3031603	AWG16/3C	6.9	0.271	48	24
A3031604	AWG16/4C	7.7	0.304	62	32
A3031606	AWG16/6C	9.1	0.357	89	49
A3031608	AWG16/8C	10.3	0.407	119	65
A3031610	AWG16/10C	11.9	0.469	149	81
A3031615	AWG16/15C	13.5	0.532	207	122
A3031620	AWG16/20C	14.9	0.587	264	163
A3031625	AWG16/25C	17.0	0.669	336	204

### Color Code Table AWG 22

1- BK	13- WH/RD
2- BN	14- WH/OG
3- RD	15- WH/YE
4- OG	16- WH/GN
5- YE	17- WH/BU
6- GN	18- WH/VT
7- BU	19- WH/GY
8- VT	20- WH/BK/BN
9- GY	21- WH/BK/RD
10- WH	22- WH/BK/OG
11- WH/BK	23- WH/BK/YE
12- WH/BN	24- WH/BK/GN
	25- WH/BK/BU

### Color Code Table AWG 20, 18 & 16

1- BK	13- RD/GN
2- RD	14- RD/YE
3- WH	15- RD/BK
4- GN	16- WH/BK
5- OG	17- WH/RD
6- BU	18- WH/GN
7- BN	19- WH/YE
8- YE	20- WH/BU
9- VT	21- WH/BN
10- GY	22- WH/OG
11- PK	23- WH/GY
12- TN	24- WH/VT
	25- WH/BK/RD

# LUTZE Electronic PLTC PVC, Shielded

## Flexible Electronic Cable with UL/CE/PLTC Approvals



### Application

Double shielded industrial grade PLTC electronic cable for machine tools, process instrumentation and controls, computer peripherals, HVAC technology, assembly and production lines, low voltage interconnect and other industrial applications including installation in cable trays

### Characteristics

- Flexible for easy installation
- Easy strip design
- Color coded conductors
- Specially formulated jacket for oil resistance
- Premium durability
- Extended temperature range
- UL listed and NFPA 79 compliant
- Talc and Silicone free

### Technical Data

Voltage	300V
Temperature	-40°C - +105°C
Minimum bending radius	4 x cable OD
Conductor marking	See tables
Burning behavior	Flame retardant per UL VW-1, FT4
Oil resistance	Oil Res II
Approvals	UL Type PLTC UL Type CM AWM Style 2464 AWM II A/B CE Meets NEC 725, 760, 800 Class I, II Div. 2 per NEC Art. 336, 392, 501, 502 (PLTC use only) RoHS REACH

### Construction

- AWG conductor
- Flexible fine wire stranded tinned copper conductors
- SR-PVC insulation
- Shielded with foil tape, tinned copper braid and drain wire
- Oil resistant premium PVC jacket
- Gray jacket similar to RAL 7001

Specifications are subject to change without prior notice

Part No.	Description No. of conductors	OD / Ø ca. mm	OD / Ø inches	Weight Lbs/Mft	Copper Lbs/Mft
<b>AWG 22 (19/34)</b>					
A3132202	AWG22/2C	5.0	0.197	27	11
A3132203	AWG22/3C	5.2	0.205	32	15
A3132204	AWG22/4C	5.5	0.218	37	18
A3132206	AWG22/6C	6.3	0.247	47	24
A3132208	AWG22/8C	6.7	0.263	55	30
A3132210	AWG22/10C	7.7	0.303	67	36
A3132215	AWG22/15C	8.6	0.338	88	50
A3132220	AWG22/20C	9.4	0.369	109	62
A3132225	AWG22/25C	10.7	0.423	137	77
<b>AWG 20 (19/32)</b>					
A3132002	AWG20/2C	5.6	0.221	35	17
A3132003	AWG20/3C	5.8	0.230	42	22
A3132004	AWG20/4C	6.2	0.246	48	27
A3132006	AWG20/6C	7.2	0.284	64	37
A3132008	AWG20/8C	7.7	0.302	76	46
A3132010	AWG20/10C	8.7	0.343	91	55
A3132015	AWG20/15C	10.3	0.404	128	76
A3132020	AWG20/20C	11.5	0.454	157	97
A3132025	AWG20/25C	12.2	0.481	189	118
<b>AWG 18 (19/30)</b>					
A3131802	AWG18/2C	5.9	0.233	44	27
A3131803	AWG18/3C	6.2	0.243	53	34
A3131804	AWG18/4C	6.7	0.262	62	41
A3131806	AWG18/6C	7.9	0.311	85	55
A3131808	AWG18/8C	8.4	0.332	102	68
A3131810	AWG18/10C	9.6	0.379	123	83
A3131815	AWG18/15C	11.4	0.447	175	117
A3131820	AWG18/20C	12.4	0.488	217	150
A3131825	AWG18/25C	13.6	0.535	260	182
<b>AWG16 (26/30)</b>					
A3131602	AWG16/2C	7.3	0.288	59	32
A3131603	AWG16/3C	7.7	0.302	68	40
A3131604	AWG16/4C	8.3	0.325	81	49
A3131606	AWG16/6C	9.6	0.378	111	68
A3131608	AWG16/8C	10.9	0.428	143	86
A3131610	AWG16/10C	12.4	0.490	175	105
A3131615	AWG16/15C	14.0	0.553	237	149
A3131620	AWG16/20C	16.0	0.628	308	192
A3131625	AWG16/25C	17.5	0.690	371	236

### Color Code Table AWG 22

1-	BK	13-	WH/RD
2-	BN	14-	WH/OG
3-	RD	15-	WH/YE
4-	OG	16-	WH/GN
5-	YE	17-	WH/BU
6-	GN	18-	WH/VT
7-	BU	19-	WH/GY
8-	VT	20-	WH/BK/BN
9-	GY	21-	WH/BK/RD
10-	WH	22-	WH/BK/OG
11-	WH/BK	23-	WH/BK/YE
12-	WH/BN	24-	WH/BK/GN
		25-	WH/BK/BU

### Color Code Table AWG 20, 18 & 16

1-	BK	13-	RD/GN
2-	RD	14-	RD/YE
3-	WH	15-	RD/BK
4-	GN	16-	WH/BK
5-	OG	17-	WH/RD
6-	BU	18-	WH/GN
7-	BN	19-	WH/YE
8-	YE	20-	WH/BU
9-	VT	21-	WH/BN
10	GY	22-	WH/OG
11-	PK	23-	WH/GY
12-	TN	24-	WH/VT
		25-	WH/BK/RD



# LUTZE Electronic PLTC PVC, Shielded

## Flexible Electronic Cable with UL/CE/PLTC Approvals



### Application

Double shielded industrial grade PLTC electronic cable for machine tools, process instrumentation and controls, computer peripherals, HVAC technology, assembly and production lines, low voltage interconnect and other industrial applications including **installation in cable trays**

### Characteristics

- Flexible for easy installation
- Easy strip design
- Color coded conductors
- Specially formulated jacket for oil resistance
- Premium durability
- Extended temperature range
- **UL listed** and **NFPA 79** compliant
- Talc and Silicone free

### Technical Data

Voltage	300V
Temperature	-40°C - +105°C
Minimum bending radius	4 x cable OD
Conductor marking	See tables
Burning behavior	Flame retardant per UL VW-1, FT4
Oil resistance	Oil Res II
Approvals	UL Type PLTC UL Type CM AWM Style 2464 AWM II A/B CE Meets NEC 725, 760, 800 Class I, II Div. 2 per NEC Art. 336, 392, 501, 502 (PLTC use only) RoHS REACH

### Construction

- AWG conductor
- Flexible fine wire stranded tinned copper conductors, twisted in pairs
- SR-PVC insulation
- Shielded with foil tape, tinned copper braid and drain wire
- Oil resistant premium PVC jacket
- Gray jacket similar to RAL 7001

Part No.	Description No. of conductors	OD / Ø ca. mm	OD / Ø inches	Weight Lbs/Mft	Copper Lbs/Mft
<b>AWG 22 (19/34)</b>					
A3142202	AWG22/1TP	5.0	0.197	27	12
A3142204	AWG22/2TP	6.6	0.261	42	21
A3142206	AWG22/3TP	6.9	0.273	54	26
A3142208	AWG22/4TP	7.7	0.305	62	31
A3142210	AWG22/5TP	8.3	0.328	71	37
A3142212	AWG22/6TP	9.0	0.353	81	43
A3142216	AWG22/8TP	9.6	0.378	98	54
<b>AWG 20 (19/32)</b>					
A3142002	AWG20/1TP	5.7	0.225	35	18
A3142004	AWG20/2TP	7.6	0.301	55	30
A3142006	AWG20/3TP	8.0	0.315	67	38
A3142008	AWG20/4TP	8.7	0.341	81	47
A3142010	AWG20/5TP	9.3	0.368	95	55
A3142012	AWG20/6TP	10.5	0.413	115	66
A3142016	AWG20/8TP	11.3	0.443	139	84
<b>AWG 18 (19/30)</b>					
A3141802	AWG18/1TP	5.9	0.233	44	27
A3141804	AWG18/2TP	8.4	0.330	72	44
A3141806	AWG18/3TP	8.8	0.348	89	57
A3141808	AWG18/4TP	9.6	0.377	108	71
A3141810	AWG18/5TP	10.9	0.428	135	85
A3141812	AWG18/6TP	11.7	0.462	154	99
A3141816	AWG18/8TP	12.6	0.496	188	125
<b>AWG16 (26/30)</b>					
A3141602	AWG16/1TP	7.3	0.288	61	34
A3141604	AWG16/2TP	10.8	0.425	107	55
A3141606	AWG16/3TP	11.4	0.448	127	72
A3141608	AWG16/4TP	12.3	0.486	155	91
A3141612	AWG16/6TP	14.6	0.573	213	128
A3141616	AWG16/8TP	16.2	0.639	270	162

#### Color Code Table AWG 22 Pair

1-	WH/BK
2-	WH/BN
3-	WH/RD
4-	WH/OG
5-	WH/YE
6-	WH/GN
7-	WH/BU
8-	WH/VT

#### Color Code Table AWG 20, 18 & 16 Pair

1-	BK/RD
2-	BK/WH
3-	BK/GN
4-	BK/BU
5-	BK/BN
6-	BK/YE
7-	BK/OG
8-	BK/GN

Specifications are subject to change without prior notice

# LUTZE SUPERFLEX® Tronic PUR, Unshielded

## High Flexing Electronic Cable with UL/CE Approvals



### Application

- Multi-conductor cable for robots, handling equipment, machine tools, C-tracks and applications with extremely rough operating conditions
- For the most demanding flexing applications such as C-tracks and linear flexing
- Compatible with all major brand C-tracks

### Characteristics

- Superfine stranding per Class 6 for continuous moving applications
- PUR jacket and TPE conductor insulation for use in extremely harsh operating conditions
- Highest level of resistance against cooling fluids, greases and oils
- Abrasion and hydrolysis resistant, low water absorption
- Dry, wet and damp conditions
- UV resistant
- Talc and Silicone free

### Technical Data

Voltage	300V UL AWM
Temperature	Moving -25°C - +80°C Fixed -40°C - +80°C
Minimum bending radius	Moving 10 x cable OD Fixed 6 x cable OD
Conductor marking	Color coded per DIN EN 50334 or DIN 47100
Isolation resistance	Min 20MΩ x km
Burning behavior	Flame retardant per DIN EN 60332-1-2 IEC 60332-1, UL 1581 section VW-1 Flame Test FT1
Halogen free	According to DIN EN 60754-1
Oil resistance	Oil Res II
Approvals	UL AWM Style 20549 RoHS REACH

### Construction

- Metric conductor
- Bare copper super finely stranded per DIN VDE 0295 Class 6 or IEC 60228 Class 6
- TPE conductor insulation
- G: with GNYE ground conductor  
x: without ground conductor
- Layer pitch optimized
- Fleece wrap over cabled conductors
- PUR jacket, matte, adhesion-free surface
- Extremely oil resistant PUR jacket
- Gray jacket, similar to RAL 7001

Part No.	Description No. of conductors	OD / Ø ca. mm	OD / Ø inches	Weight Lbs/Mft	Copper Lbs/Mft
<b>AWG 24 / 0.25 mm<sup>2</sup></b>					
117039	2x0.25	3.8	0.150	12	3
117040	3x0.25	4.0	0.157	14	5
117041	4x0.25	4.4	0.173	17	7
117042	5x0.25	4.7	0.185	19	8
117043	7x0.25	5.4	0.213	25	11
117044	10x0.25	6.3	0.248	33	16
117028	15x0.25	7.1	0.280	46	24
117046	18x0.25	7.4	0.291	53	29
117047	25x0.25	8.8	0.346	71	40
<b>AWG 22 / 0.34 mm<sup>2</sup></b>					
117048	2x0.34	4.1	0.161	13	6
117049	3x0.34	4.3	0.169	16	7
117050	4x0.34	4.6	0.181	19	9
117051	5x0.34	5.0	0.197	23	11
117052	7x0.34	5.7	0.224	30	15
117053	10x0.34	6.7	0.264	40	20
117029	15x0.34	7.6	0.299	56	30
117055	18x0.34	7.9	0.311	64	38
117056	25x0.34	9.5	0.374	86	52

Specifications are subject to change without prior notice

# LUTZE SUPERFLEX® Tronic (C) PUR, Shielded

## High Flexing Electronic Cable with UL/CE Approvals



### Application

- Multi-conductor cable for robots, handling equipment, machine tools, C-tracks and applications with extremely rough operating conditions
- For the most demanding flexing applications such as C-tracks and linear flexing
- Compatible with all major brand C-tracks

### Characteristics

- Super finely stranded per Class 6 for continuous moving applications
- PUR jacket and TPE conductor insulation for use in extremely harsh operating conditions
- Highest level of resistance against cooling fluids, greases and oils
- Abrasion and hydrolysis resistant, low water absorption
- Dry, wet and damp conditions
- UV resistant
- Talc and Silicone free

### Technical Data

Voltage	300V UL AWM
Temperature	Moving -25°C - +80°C Fixed -40°C - +80°C
Minimum bending radius	Moving 12 x cable OD Fixed 6 x cable OD
Conductor marking	Color coded per DIN EN 50334 or DIN 47100
Isolation resistance	Min. 20MΩ x km
Burning behavior	Flame retardant per DIN EN 60332-1-2 IEC 60332-1 UL 1581 section VW-1 Flame Test FT1
Halogen free	According to DIN EN 60754-1
Oil resistance	Oil Res II
Approvals	UL AWM Style 20549 RoHS REACH

### Construction

- Metric conductor
- Bare copper super finely stranded per DIN VDE 0295 Class 6 and IEC 60228 Class 6
- Special TPE conductor insulation
- G: with GNYE ground conductor  
x: without ground conductor
- Layer pitch optimized
- Fleece wrap over cabled conductors
- Tinned copper braid shield, optical coverage ≥ 85 %
- PUR jacket, matte, adhesion-free surface
- Extremely oil resistant PUR jacket
- Gray jacket, similar to RAL 7001

Part No.	Description No. of conductors	OD / Ø ca. mm	OD / Ø inches	Weight Lbs/Mft	Copper Lbs/Mft
<b>AWG 24 / 0.25 mm<sup>2</sup></b>					
117099	(2x0.25)	4.3	0.169	18	9
117100	(3x0.25)	4.5	0.177	20	11
117101	(4x0.25)	4.8	0.189	24	13
117102	(5x0.25)	5.1	0.201	27	15
117103	(7x0.25)	5.8	0.228	34	21
117104	(10x0.25)	6.7	0.264	43	28
117106	(18x0.25)	7.8	0.307	65	43
117107	(25x0.25)	9.4	0.370	85	57
<b>AWG 22 / 0.34 mm<sup>2</sup></b>					
117108	(2x0.34)	4.5	0.177	20	10
117109	(3x0.34)	4.7	0.185	23	13
117110	(4x0.34)	5.0	0.197	27	16
117111	(5x0.34)	5.4	0.213	31	19
117112	(7x0.34)	6.2	0.244	39	25
117113	(10x0.34)	7.1	0.280	50	34
117124	(15x0.34)	7.3	0.287	68	50
117115	(18x0.34)	8.4	0.331	77	54
117116	(25x0.34)	10.0	0.394	107	77

Specifications are subject to change without prior notice

# LUTZE SUPERFLEX® Tronic (C) PUR TP, Shielded

## High Flexing Electronic Cable with UL/CE Approvals



### Application

- Multi-conductor cable for robots, handling equipment, machine tools, C-tracks and applications with extremely rough operating conditions
- For the most demanding flexing applications such as C-tracks and linear flexing
- Compatible with all major brand C-tracks

### Characteristics

- Super finely stranded per Class 6 for continuous moving applications
- PUR jacket and TPE conductor insulation for use in extremely harsh operating conditions
- Highest level of resistance against cooling fluids, greases and oils
- Abrasion and hydrolysis resistant, low water absorption
- Dry, wet and damp conditions
- UV resistant
- Non-wicking fillers
- Talc and Silicone free

### Technical Data

Voltage	300V UL AWM
Temperature	Moving -25°C - +80°C Fixed -40°C - +80°C
Minimum bending radius	Moving 12 x cable OD Fixed 6 x cable OD
Conductor marking	Color coded per DIN EN 50334 or DIN 47100 for twisted pairs
Isolation resistance	Min 20MΩ x km
Burning behavior	Flame retardant per DIN EN 60332-1-2 IEC 60332-1 UL 1581 section VW-1 Flame Test FT 1
Halogen free	According to DIN EN 60754-1
Oil resistance	Oil Res II
Approvals	UL AWM Style 20233 RoHS REACH

### Construction

- Metric conductor
- Bare copper super finely stranded per DIN VDE 0295 Class 6 and IEC 60228 Class 6
- Special TPE conductor insulation
- G: with GNYE ground conductor  
x: without ground conductor
- Layer pitch optimized
- Fleece wrap over cabled conductors
- Tinned copper braid shield, optical coverage ≥ 85 %
- PUR jacket, matte, adhesion-free surface
- Extremely oil resistant PUR jacket
- Gray jacket, similar to RAL 7001

Part No.	Description No. of conductors	OD / Ø ca. mm	OD / Ø inches	Weight Lbs/Mft	Copper Lbs/Mft
<b>AWG 24 / 0.25 mm<sup>2</sup></b>					
117170	(2x2x0.25)	6.2	0.244	30	15
117171	(3x2x0.25)	6.5	0.256	34	19
117172	(4x2x0.25)	6.8	0.268	38	23
117173	(5x2x0.25)	7.7	0.303	49	27
117177	(6x2x0.25)	8.1	0.319	54	32
117174	(8x2x0.25)	9.4	0.370	75	40
117175	(10x2x0.25)	10.5	0.413	83	53
117176	(12x2x0.25)	10.8	0.425	95	61
<b>AWG 22 / 0.34 mm<sup>2</sup></b>					
117180	(2x2x0.34)	6.5	0.256	32	17
117181	(3x2x0.34)	6.8	0.268	39	23
117182	(4x2x0.34)	7.4	0.291	47	28
117184	(6x2x0.34)	8.6	0.339	65	40
117185	(8x2x0.34)	10.0	0.394	87	56
117187	(12x2x0.34)	11.2	0.441	113	77
<b>AWG 21 / 0.5 mm<sup>2</sup></b>					
117190	(2x2x0.5)	7.1	0.280	40	23
117191	(3x2x0.5)	7.5	0.295	48	30
117303	(4x2x0.5)	8.2	0.323	59	38
117193	(6x2x0.5)	9.9	0.390	91	54
117194	(8x2x0.5)	11.2	0.441	114	75
117196	(12x2x0.5)	12.6	0.496	150	105
<b>AWG 19 / 0.75 mm<sup>2</sup></b>					
117199	(2x2x0.75)	8.3	0.327	56	32
117201	(3x2x0.75)	8.8	0.346	67	42
117202	(4x2x0.75)	9.7	0.382	86	55



### 3. Actuator sensor cables





# LUTZE SUPERFLEX® TRONIC AS PUR, Unshielded

## High Flexing Actuator Sensor Cable with UL Approval



### Application

- Termination cable for actuator-sensor applications
- For continuous flexing use in C-tracks or free movement in automation technology, transport and conveyor technology, machine tool manufacturing
- Full PUR jacket and TPE conductor insulation optimally suited for extremely harsh operating conditions, aggressive coolants and lubricants

### Characteristics

- Very good alternating bending strength
- Good pressure and flexing stability
- Low adhesion, abrasion-resistant, nick-resistant, tear-resistant
- Hydrolysis-resistant, microbe-resistant, and rot-resistant
- Weathering, ozone and UV resistant
- Salt water resistant
- Excellent coolant and lubricant resistance
- Largely resistant to oils, greases, alcohol-free benzenes and kerosene
- Talc and Silicone free

### Technical Data

Voltage	300V UL AWM
Test voltage	3000V
Insulation resistance	Min. 100MΩ x km
Temperature range	Moving -20°C - +80°C Fixed -40°C - +80°C
Minimum bending radius	Moving 8 x cable OD Fixed 4 x cable OD
Burning behavior	Flame retardant per DIN EN 60332-1-2 IEC 60332-1 UL 1581 section VW-1 Flame Test FT1
Halogen free	According to DIN EN 60754-1
Approvals	UL AWM 20549 RoHS REACH

### Construction

- Metric conductor
- Bare copper wire super finely stranded per DIN VDE 0295 class 6 and IEC 60228 class 6
- Special TPE conductor insulation
- G: with GNYE ground conductor  
x: without ground conductor
- Conductors color coded per EN 60947-5-2
- Layer pitch optimized
- Fleece wrap over cabled conductors
- PUR jacket, matte, adhesion-free surface
- Black jacket RAL 9005

Specifications are subject to change without prior notice

Part No.	Description No. of conductors	OD / Ø ca. mm	OD / Ø inches	Weight Lbs/Mft	Copper Lbs/Mft
<b>AWG24 / 0.25 mm<sup>2</sup></b>					
117240	3x0.25 BN, BU, BK	4.0	0.157	13	5
117241	4x0.25 BN, WH, BU, BK	4.3	0.169	15	7
117242	8x0.25 WH, BN, GN, YE, GY, PK, BU, RD	5.9	0.232	28	14
<b>AWG22 / 0.34 mm<sup>2</sup></b>					
117243	3x0.34 BN, BU, BK	4.2	0.165	15	7
117244	4x0.34 BN, WH, BU, BK	4.5	0.177	18	9
117245	5x0.34 BN, WH, BU, BK, GY	4.9	0.193	22	11
117246	5x0.34 BN, WH, BU, BK, GN-YE	4.9	0.193	22	11

### With Power Supply Conductors

110872	3G1.0+8x0.34 1.0: BN, BU, GNYE 0.34: WH, BK, GN, YE, GY, PK, VT, RD	8.2	0.323	67	37
110874	3G1.0+16x0.34 1.0: BN, BU, GNYE 0.34: WH, GN, YE, GY, PK, RD, BK, VT, GYPK, RDBU, WHGN, BNGN, WHYE, YEBN, WHGY, GYBN	9.7	0.382	91	54

“Extra rugged actuator sensor cable for use in continuous motion applications such as energy chains”.



# LUTZE SUPERFLEX® TRONIC AS (C) PUR, Shielded

## High Flexing Actuator Sensor Cable with UL Approval



### Application

- Termination cable for actuator-sensor applications
- For continuous flexing use in C-tracks or free movement in the automation technology, transport and conveyor technology, machine tool manufacturing
- Full PUR jacket and TPE conductor insulation optimally suited for extremely harsh operating conditions, aggressive coolants and lubricants

### Characteristics

- High active and passive interference resistance (EMC)
- Very good alternating bending strength
- Good pressure and flexing stability
- Low adhesion, abrasion-resistant, nick-resistant, tear-resistant
- Hydrolysis-resistant, microbe-resistant, and rot-resistant
- Weathering, ozone and UV resistant
- Salt water resistant
- Excellent coolant and lubricant resistance
- Largely resistant to oils, greases, alcohol-free benzenes and kerosene
- Talc and Silicone free

### Technical Data

Voltage	300V UL AWM
Test voltage	3000V
Insulation resistance	Min. 100MΩ x km
Temperature range	Moving -20°C - +80°C
	Fixed -40°C - +80°C
Minimum bending radius	Moving 12 x cable OD
	Fixed 6 x cable OD
Burning behavior	Flame retardant per DIN EN 60332-1-2 IEC 60332-1 UL 1581 section VW-1 Flame Test FT1
Halogen free	According to DIN EN 60754-1
Approvals	UL AWM 20549 RoHS REACH

### Construction

- Metric conductor
- Bare copper wire finely stranded per DIN VDE 0295 class 6 and IEC 60228 class 6
- Special TPE conductor insulation
- G: with GNYE ground conductor
- x: without ground conductor
- Conductors color coded per EN 60947-5-2
- Layer pitch optimized
- Fleece wrap over cabled conductors
- Tinned copper braid shield, optical coverage ≥ 85 %
- PUR jacket, matte, adhesion-free surface
- Black jacket RAL 9005

Part No.	Description No. of conductors	OD / Ø ca. mm	OD / Ø inches	Weight Lbs/Mft	Copper Lbs/Mft
<b>AWG24 / 0.25 mm<sup>2</sup></b>					
<b>117250</b>	(3x0.25) BN, BU, BK	4.6	0.181	19	11
<b>117251</b>	(4x0.25) BN, WH, BU, BK	4.9	0.193	22	13
<b>117252</b>	(8x0.25) WH, BN, GN, YE, GY, PK, BU, RD	6.3	0.248	37	24
<b>AWG22 / 0.34 mm<sup>2</sup></b>					
<b>117253</b>	(3x0.34) BN, BU, BK	4.8	0.189	22	13
<b>117254</b>	(4x0.34) BN, WH, BU, BK	5.1	0.201	26	16
<b>117255</b>	(5x0.34) BN, WH, BU, BK, GY	5.5	0.217	30	19

“Extra rugged actuator sensor cable for use in continuous motion applications such as energy chains”.



Specifications are subject to change without prior notice

## 4. Bus and network cables





# LUTZE BUS TPE

## Flexible ASI BUS Cable



### Application

- System cables for connection of actuator interface components
- Applications in automation technology, tool and machine construction, plants and device construction, transport and conveyor technology

Part No.	Description No. of conductors	Weight Lbs/Mft	Copper Lbs/Mft	Jacket
<b>AWG16 / 1.5 mm<sup>2</sup></b>				
<b>104216</b>	2x1.5	46	19	Yellow
<b>104217</b>	2x1.5	46	19	Black

### Characteristics

- Inverse-polarity-proof flat cable
- Fast contacting through penetration technology
- In the TPE design especially suitable in areas in with oils, greases and coolants and lubricants
- Talc and Silicone free

### Technical data

Rated voltage	300V
Test voltage	2000V
Temperature range	Moving -5°C - +80°C Fixed -30°C - +80°C
Loop resistance	27.4mΩ/m
Approvals	RoHS REACH

### Construction

- Metric conductor
- Bare copper wire 1.5 mm<sup>2</sup> acc. to VDE 0295 class 5
- PVC conductor insulation color coded; brown and blue
- G: with GNYE ground conductor  
x: without ground conductor
- TPE outer jacket
- Jacket color black: for auxiliary power 30 V<sub>DC</sub>
- Jacket color yellow: for data and energy transmission

Specifications are subject to change without prior notice

# LUTZE PROFIBUS (C) PVC, Shielded

## Flexible PROFIBUS Cable with UL Approval



### Application

- For the cabling of industrial field bus systems like PROFIBUS DP, F.I.P.
- With solid conductor AWG22/1 for hard wiring or with stranded conductor for flexible use and stationary application
- Automation technology, transport and conveyor technology, machine tool manufacturing

### Characteristics

- High active and passive interference resistance (EMC)
- Talc and Silicone free

### Technical data

Impedance	150Ω ± 15Ω
Loop resistance	Solid 22/1 <110Ω/km Flexible 24/7 <175.2Ω/km
Operating capacitance	Nominal 30pF/m
Rated voltage	300V CMX/CMG
Test voltage	1,500V, 50Hz
Temperature range	Moving -10°C - +70°C Fixed -40°C - +80°C
Minimum bending radius	Moving 15 x cable OD Fixed 7.5 x cable OD
Burning behavior	Flame retardant per CMX: FT1 UL 1581, IEC 60332-1 CMG: FT4 UL 1685, IEC 60332-3-24
Approvals	cULus CMX/CMG UL AWM RoHS REACH

### Construction

- AWG conductor
- Bare copper wire
- Conductor insulation special polyolefin
- Stranding with filler
- ST static foil shield
- Tinned copper braid shield, optical coverage ≥ 70 %
- Special thermoplastic on PVC basis
- Violet jacket RAL 4001

Specifications are subject to change without prior notice

Part No.	Description No. of conductors	OD / Ø ca. mm	OD / Ø inches	Weight Lbs/Mft	Copper Lbs/Mft
----------	----------------------------------	------------------	------------------	-------------------	-------------------

### PROFIBUS, Solid UL/CMX/AWM 20601 300V

104378	(1x2xAWG22/1) RD, GN	8.0	0.315	40	20
--------	-------------------------	-----	-------	----	----

### PROFIBUS, Flexible UL/CMG/AWM 21694 600V

104344	(1x2xAWG24/7) RD, GN	8.0	0.315	44	17
--------	-------------------------	-----	-------	----	----

### PROFIBUS, Fast Connect UL/CMG/AWM 20201 600V

104293	(1x2xAWG22/1) RD, GN	7.8	0.307	50	20
--------	-------------------------	-----	-------	----	----

# LUTZE SUPERFLEX® PROFIBUS (C) PUR, Shielded

## High Flexing PROFIBUS Cable with UL Approval



### Application

- For the cabling of industrial field bus systems like PROFIBUS DP, SINEC L2, F.I.P.
- For continuous flexing applications in C-tracks or free movement in automation technology, transport and conveyor technology, machine tool manufacturing

### Characteristics

- High active and passive interference resistance (EMC)
- Talc and Silicone free

### Technical data

Impedance	150Ω ± 15Ω
Loop resistance	<133Ω/km
Operating capacitance	<30pF/m
Rated voltage	300V (max. value)
Test voltage	1,500V, 50Hz
Temperature range	Moving -30°C - +70°C Fixed -40°C - +80°C
Minimum bending radius	Moving 7.5 x cable OD Fixed 5 x cable OD Moving Fast Connect 15 x cable OD Fixed Fast Connect 7.5 x cable OD
Burning behavior	Flame retardant per FT1, UL 1581 VW-1 Flame test IEC 60332-1
Approvals	cULus CMX UL AWM 21198 300V 80C RoHS REACH

### Construction

- AWG conductor
- Bare copper wire
- Special polyolefin conductor insulation
- Inner jacket versions with fast assembly FC
- ST static foil shield
- Tinned copper wire braid, optical coverage ≥ 85 %, for 104287 optical coverage ≥ 70 %
- Special PUR
- Violet jacket RAL 4001

Specifications are subject to change without prior notice

Part No.	Description No. of conductors	OD / Ø ca. mm	OD / Ø inches	Weight Lbs/Mft	Copper Lbs/Mft
----------	----------------------------------	---------------------	------------------	-------------------	-------------------

### PROFIBUS, UL/CMX

104265	(1x2xAWG24/19) RD, GN	8.0	0.315	37	16
--------	--------------------------	-----	-------	----	----

### PROFIBUS, Fast Connect UL/CMX

104287	(1x2xAWG24/19) RD, GN	8.0	0.315	54	20
--------	--------------------------	-----	-------	----	----

### PROFIBUS, ET200 UL/CMX

104275	((1x2xAWG24/19)ST+3x0.75)C RD/GN, BU, BK, GNYE	9.8	0.386	97	44
--------	---	-----	-------	----	----

# LUTZE CAN Bus (C) PVC, Shielded

## Flexible CAN Bus Cable with UL Approval



- For wiring of industrial field bus systems
- For fixed installation or flexible and stationary application
- Automation technology, transport and conveyor technology, machine tool manufacturing

### Characteristics

- High active and passive interference resistance (EMC)
- Talc and Silicone free

### Technical data

Rated voltage	300V CMX
Test voltage	1,500V
Impedance	nom. 120Ω
Loop resistance	AWG24/7 < 175.2Ω/km AWG22/7 < 110.8Ω/km
Operating capacitance	< 60pF/m
Temperature range	Moving -10 °C - +70 °C Fixed -40 °C - +75 °C
Minimum bending radius	Moving 15 x cable OD Fixed 7.5 x cable OD
Burning behavior	Flame retardant per DIN EN 60332-1-2 IEC 60332-1
Approvals	cULus CMX RoHS REACH

### Construction

- AWG conductor
- Bare copper wire
- Conductor insulation special polyolefin
- Conductors twisted pairs, cabled, foil banded
- Tinned copper braid shield, optical coverage ≥ 85 %
- Jacket special PVC TM2 according to HD21.1, matte, adhesion-free surface
- Violet jacket RAL 4001

Specifications are subject to change without prior notice

Part No.	Description No. of conductors	OD / Ø ca. mm	OD / Ø inches	Weight Lbs/Mft	Copper Lbs/Mft
----------	----------------------------------	------------------	------------------	-------------------	-------------------

### CAN Bus UL/CMX, 40 m / 131 ft max.

104386	(1x2xAWG24/7) WH/BN	5.7	0.224	29	13
104387	(2x2xAWG24/7) WH/BN, GN/YE	7.4	0.291	46	24


### CAN Bus UL/CMX, 200 m / 656 ft max.

104388	(1x2xAWG22/7) WH/BN	6.7	0.264	39	18
104389	(2x2xAWG22/7) WH/BN, GN/YE	8.5	0.334	58	31



# LUTZE SUPERFLEX® CAN Bus (C) PUR, Shielded

## High Flexing CAN Bus Cable with UL Approval

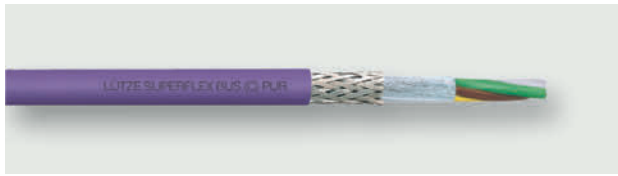

### Application

- For wiring of industrial field bus systems
- For continuous flexing applications in C-tracks or free movement in automation technology, transport and conveyor technology, machine tool manufacturing

### Characteristics

- High active and passive interference resistance (EMC)
- Talc and Silicone free

### Technical data

Rated voltage	300V CMX
Test voltage	3000V
Impedance	nom. 120Ω
Operating capacitance	< 60pF/m
Temperature range	Moving -30°C - +70°C Fixed -40°C - +75°C
Minimum bending radius	Moving 15 x cable OD Fixed 7.5 x cable OD
Burning behavior	Flame retardant per DIN EN 60332-1-2 IEC 60332-1 UL 1581 section VW-1 Flame Test FT 1
Halogen free	According to DIN EN 60754-1
Approvals	cULus CMX RoHS REACH

### Construction

- AWG conductor
- Bare copper wire
- Conductor insulation special polyolefin
- Conductors twisted pairs or star quad cabled, foil banded
- Tinned copper braid shield, optical coverage ≥ 85 %
- Special PUR jacket, matte, adhesion-free surface
- Violet jacket RAL 4001

Specifications are subject to change without prior notice

Part No.	Description No. of conductors	OD / Ø ca. mm	OD / Ø inches	Weight Lbs/Mft	Copper Lbs/Mft
----------	----------------------------------	------------------	------------------	-------------------	-------------------

### CAN Bus UL/CMX, 40 m / 131 ft max.

<b>104390</b>	(1x2xAWG24/19) WH/BN	5.4	0.213	30	16
<b>104391</b>	(2x2xAWG24/19) WH/BN, YE/GN	7.2	0.283	48	22

# LUTZE DeviceNet™ BUS (C) PVC, Shielded

## Flexible DeviceNet™ Cable with UL Approval



### Application

- For the wiring of industrial devices, sensors, control devices (SPS), valves
- DeviceNet™ is the leading BUS system for industry automation in the USA
- For flexible use and stationary application
- Automation technology, transport and conveyor technology, machine tool manufacturing

### Characteristics

- 2-pair cable: The pair with the smaller cross section is for data transmission, the pair with the larger cross section is for the power supply
- High active and passive interference resistance through double shielding (StC)
- Talc and Silicone free

### Technical data

Impedance	120Ω ± 12Ω
Operating capacitance	< 40pF/m
Rated voltage	300V
Test voltage	3000V
Temperature range	Moving -10°C - +75°C Fixed -40°C - +75°C
Minimum bending radius	Moving 10 x cable OD Fixed 5 x cable OD
Burning behavior	Flame retardant per DIN EN 60332-1-2 IEC 60332-1 UL 1581 section VW-1 Flame Test FT1
Approvals	cULus CMG RoHS REACH

Part No.	Description No. of conductors	OD / Ø ca. mm	OD / Ø inches	Weight Lbs/Mft	Copper Lbs/Mft
----------	----------------------------------	------------------	------------------	-------------------	-------------------

### DeviceNet™ Thick UL/CM, PLTC, gray

104281	((2xAWG18)+(2xAWG16)) AWG16: RD, BK AWG18: WH, BU	12.1	0.480	136	48.0
--------	---	------	-------	-----	------

### DeviceNet™ Thin UL/CM, CI2, gray

104280	((2xAWG24)+(2xAWG22)) AWG22: RD, BK AWG24: WH, BU	7.1	0.280	49	17.8
--------	---	-----	-------	----	------

### Construction

- AWG conductor
- Tinned copper wire
- Conductor insulation special polyolefin
- Both pairs statically shielded with foil shield, 100% coverage, and drain wire
- Overall tinned copper braid shield
- Jacket special PVC, matte, adhesion-free surface
- Gray jacket RAL 7001

Specifications are subject to change without prior notice

# LUTZE SUPERFLEX® DeviceNet™ BUS (C) PUR, Shielded

## High Flexing DeviceNet™ Cable with UL Approval



### Application

- For the wiring of industrial devices, sensors, control devices (SPS), valves
- DeviceNet™ is the leading BUS system for industry automation in the USA
- For continuous flexing applications in C-tracks or free movement in automation technology, transport and conveyor technology, machine tool manufacturing

### Characteristics

- 2-pair cable: The pair with the smaller cross section is for data transmission, the pair with the larger cross section is for the power supply
- High active and passive interference resistance through double shielding (StC)
- Talc and Silicone free

### Technical data

Impedance	120Ω ± 12Ω
Operating capacitance	< 40pF/m
Rated voltage	300V
Test voltage	1500V
Temperature range	Moving -20°C - +75°C Fixed -40°C - +75°C
Minimum bending radius	Moving 10 x cable OD Fixed 5 x cable OD
Burning behavior	Flame retardant per DIN EN 60332-1-2 IEC 60332-1 UL 1581 section VW-1 Flame Test FT 1
Halogen free	According to DIN EN 60754-1 IEC 60754-1
Approvals	cULus CMX CE RoHS REACH

### Construction

- AWG conductor
- Tinned copper wire
- Conductor insulation special polyolefin
- Both pairs statically shielded with foil shield, 100% coverage and drain wire
- Overall tinned copper braid shield ≥ 80%
- Jacket special PUR, matte, adhesion-free surface
- Violet jacket RAL 4001

Specifications are subject to change without prior notice

Part No.	Description No. of conductors	OD / Ø ca. mm	OD / Ø inches	Weight Lbs/Mft	Copper Lbs/Mft
----------	----------------------------------	------------------	------------------	-------------------	-------------------

### DeviceNet™ Thick UL/CMX


<b>104198</b>	((2xAWG18)+(2xAWG16)) WH/BU, RD/BK	12.2	0.480	43	20.7
---------------	---------------------------------------	------	-------	----	------

### DeviceNet™ Thin UL/CMX

<b>104289</b>	((2xAWG24)+(2xAWG22)) AWG22: RD, BK AWG24: WH, BU	7.0	0.276	57	19
---------------	---	-----	-------	----	----

# LUTZE ETHERNET BUS (C) PVC, Shielded

## Flexible ETHERNET Cable with UL Approval

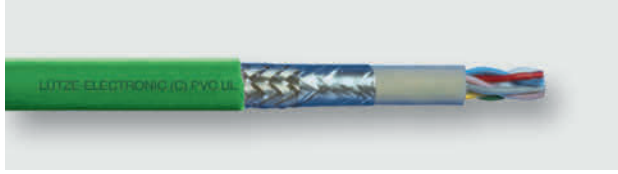

### Application

- For the cabling of industrial field bus systems with the globally accepted TCP/IP protocol
- Cable design for harsh industrial environments and operating conditions with high noise levels.
- Application in automation technology, transport and conveyor technology, machine tool manufacture
- For flexible use and stationary application

### Characteristics

- High active and passive interference resistance (EMC)
- Talc and Silicone free

### Technical data

Impedance	100Ω ± 10Ω
Loop resistance	Solid AWG 22/1= 0,34 <sup>2</sup> <110Ω/km
	Strand AWG 24/7= 0,22 <sup>2</sup> <165Ω/km
	Strand AWG 26/7=0.14 <sup>2</sup> <273Ω/km
Operating capacitance	< 50pF/m
Nominal voltage	300V
Test voltage	1500V
Temperature range	Moving -5°C - +70°C Fixed -30°C - +80°C
Minimum bending radius	Moving 12 x cable OD Fixed 6 x cable OD
Burning behavior	Flame retardant per DIN EN 60332-1-2 IEC 60332-3-24 UL 1581 section VW-1 Flame Test FT 4
Approvals	cULus CMG RoHS REACH
Item specific certifications	104336 & 104397: CC-Link IE Field
AWG specific approvals	AWG22: cULus PLTC cURus AWM 600V Class I, II Div. 2 per NEC Art. 336, 392, 501, 502

### Construction

- AWG conductor
- Bare copper wire
- Conductor insulation special polyolefin
- ST static foil shield
- Tinned copper braid shield, optical coverage ≥ 85 %
- Jacket PVC, matte, adhesion-free surface
- Green jacket RAL 6018, Teal jacket RAL 5021

For further information, see ETHERNET pages in the Technical Overview

Specifications are subject to change without prior notice

Part No.	Description No. of conductors	OD / Ø ca. mm	OD / Ø inches	Weight Lbs/Mft	Copper Lbs/Mft
----------	----------------------------------	------------------	------------------	-------------------	-------------------

### Industrial Ethernet/ProfiNet/EtherCat, Green

<b>104301</b>	(2x2xAWG22/1) CMG, PLTC, AWM 20201 600V <b>Cat5</b> 100 MHz, SF/UTQ Star-Quad, FC, ProfiNet Type A WH/BU, YE/OG	6.5	0.256	44	25
<b>104307</b>	(2x2xAWG22/7) CMG, PLTC, AWM 20201 600V <b>Cat5</b> 100 MHz, SF/UTQ Star-Quad, FC, ProfiNet Type B WH/BU, YE/OG	6.5	0.256	44	21

### Industrial Ethernet/Ethernet IP, Green

<b>104335</b>	(4x2xAWG26/7) CMG <b>Cat5e</b> 100 MHz, SF/UTP WHBU/BU, WHOG/OG, WHGN/GN, WHBN/BN	6.3	0.248	0.248	20
<b>104336</b>	(4x2xAWG24/7) CMG <b>Cat5e</b> 100 MHz, SF/UTP WHBU/BU, WHOG/OG, WH GN/GN, WHBN/BN	7.3	0.287	46	26
<b>104338</b>	(4x(2xAWG26/7)) CMG <b>Cat6a</b> 500 MHz, S/FTP WHBU/BU, WHOG/OG, WHGN/GN, WHBN/BN	6.4	0.252	36	22
<b>104397</b>	(4x(2xAWG22/1)) CMG, PLTC, AWM 2570 600V <b>Cat6a</b> 600 MHz, S/FTP WHBU/BU, WHOG/OG, WHGN/GN, WHBN/BN	9.6	0.378	65	36
<b>104331</b>	(4x(2xAWG26/7)) CMG <b>Cat7</b> 600 MHz, S/FTP WHBU/BU, WHOG/OG, WHGN/GN, WHBN/BN	7.0	0.276	42	22


### Industrial Ethernet/Ethernet IP, Teal

<b>104349</b>	(4x2xAWG22/7) CMG, PLTC, AWM 2570 600V <b>Cat5e</b> 100 MHz, SF/UTP WHBU/BU, WHOG/OG, WHGN/GN, WHBN/BN	8.6	0.338	62	32
---------------	--	-----	-------	----	----



# LUTZE SUPERFLEX® ETHERNET BUS (C) PUR, Shielded

## High Flexing ETHERNET Cable with UL Approval

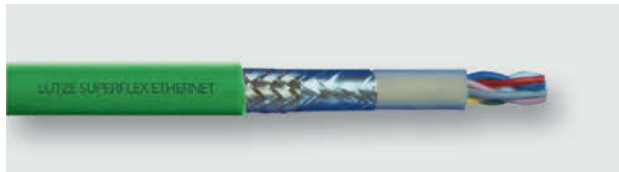

### Application

- For the cabling of industrial field bus systems with the globally accepted TCP/IP protocol
- Applicable in automation technology, transport and conveyor technology, machine tool manufacturing
- For continuous flexible applications in C-tracks or free movement

### Characteristics

- High active and passive interference resistance (EMC)
- Talc and Silicone free

### Technical data

Impedance	100Ω ± 10Ω
Loop resistance	Braid AWG 22/7= 0.34 <sup>2</sup> <110Ω/km Braid AWG 24/19= 0.24 <sup>2</sup> <155Ω/km Braid AWG 26/19=0.14 <sup>2</sup> <280Ω/km
Operating capacitance	50pF/m
Nominal voltage	300V
Test voltage	1500V
Temperature range	Moving -30°C - +70°C Fixed -40°C - +80°C
Minimum bending radius	Moving 12 x cable OD Fixed 6 x cable OD
Burning behavior	Flame retardant per DIN EN 60332-1-2 IEC 60332-1 UL 1581 section VW-1 Flame test FT 1
Halogen free	According to DIN EN 60754-1
Approvals	cULus CMX cURus AWM RoHS REACH
Item specific certifications	104337: CC-Link IE Field

### Construction

- AWG conductor
- Bare copper wire
- Conductor insulation special polyolefin
- ST static foil shield
- Tinned copper braid, optical coverage ≥ 85 %
- Jacket special-PUR, matte, adhesion-free surface
- Green jacket RAL 6018

For further information, see ETHERNET pages in the Technical Overview

Specifications are subject to change without prior notice

Part No.	Description No. of conductors	OD / Ø ca. mm	OD / Ø inches	Weight Lbs/Mft	Copper Lbs/Mft
----------	----------------------------------	------------------	------------------	-------------------	-------------------

### SUPERFLEX Industrial Ethernet/ProfiNet/EtherCat

<b>104302</b>	(2x2xAWG22/19) CMX Cat5 100 MHz, SF/UTQ Star-Quad, FC WH/BU; YE/OG	6.6	0.260	50	25
<b>104303</b>	(2x2xAWG22/7) CMX Cat5 100 MHz, SF/UTQ Star-Quad, FC, ProfiNet Type C WH/BU; YE/OG	6.5	0.256	41	21

### SUPERFLEX Industrial Ethernet/Ethernet IP

<b>104379</b>	(2x2xAWG26/19) AWM 21198 Cat5e 100 MHz, SF/UTQ WH/BU; YE/OG	5.3	0.209	24	12
<b>104337</b>	(4x2xAWG24/19) AWM 21198 Cat5e 100 MHz, S/UTP WHBU/BU, WHOG/OG, WHGN/GN, WHBN/BN	7.8	0.307	46	37
<b>104396</b>	(4x2xAWG26/19) AWM 21198 Cat5e 100 MHz, SF/UTP WHBU/BU, WHOG/OG, WHGN/GN, WHBN/BN	6.7	0.264	36	19
<b>104347</b>	(4x2xAWG26/19) CMX Cat6 350 MHz, SF/UTP WHBU/BU, WHOG/OG, WHGN/GN, WHBN/BN	7.9	0.311	42	28

## 5. Motor, Servo and Feedback cables





# LUTZE SILFLEX® Tray-ER TPE, Unshielded

## Flexible Premium TPE Power Tray Cable with Bus Drop Approval



### Application

- Multi-conductor power cable for tray applications, with **exposed run** (open wiring) approval
- Compliant with **NFPA 79** for machine tool wiring
- **TC-ER** for use with cable trays **without conduit**, which can reduce material and labor costs
- Metal cutting equipment, machine tools, machine and plant construction, HVAC technology, assembly and production lines, and other industrial applications
- WTTC – wind turbine tray cable rating for use in wind power generation
- Dry, damp and wet locations

### Characteristics

- Flexible design with Nylon for crush impact resistance per UL 1277 and easy installation
- Specially formulated TPE jacket for superior oil resistance
- Cutting oil resistant - mineral & bio/vegetable based oils *\*specifically tested with plant based cutting oil*
- Non-wicking fillers
- Sunlight resistant
- Direct burial
- Talc and Silicone free

### Technical Data

Voltage	600V UL TC-ER 600V UL MTW 1000V WTTC 600V UL AWM 105C
Temperature	-40°C - +90°C static
Minimum bending radius	4 x cable OD
Conductor marking	Black with white numbers and one green/yellow ground
Oil resistance	Oil Res I and Oil Res II
Approvals	UL Type TC-ER UL/CE UL AWM (UL) Type MTW or DP-1 UL1277 c(UL) TC WTTC Class I, II Div. 2 per NEC Art. 336, 392, 501, 502 CIC FT4 RoHS REACH UL509 BUS Drop

### Construction

- AWG conductor
- Flexible fine wire stranded bare copper conductors
- PVC/Nylon insulation / THHN – THWN
- Oil resistant TPE jacket
- Black jacket RAL 9005

Specifications are subject to change without prior notice

Part No.	Description No. of conductors incl. ground	OD / Ø ca. mm	OD / Ø inches	Weight Lbs/Mft	Copper Lbs/Mft
<b>AWG 14 (41/30)</b>					
A3321404	AWG14/04C	9.4	0.368	108	52
<b>AWG 12 (65/30)</b>					
A3321204	AWG12/04C	10.5	0.413	146	83
<b>AWG 10 (105/30)</b>					
A3321004	AWG10/04C	12.7	0.498	221	134
<b>AWG 8 (168/30)</b>					
A3320804	AWG8/04C	18.1	0.711	392	214
<b>AWG 6 (266/30)</b>					
A3320604	AWG6/04C	20.1	0.790	552	339
<b>AWG 4 (413/30)</b>					
A3320404	AWG4/04C	26.3	1.033	910	516
<b>AWG 2 (665/30)</b>					
A3320204	AWG2/04C	30.8	1.214	1,391	883
<b>1/0 (1064/30)</b>					
A3321004	1/0/4C	36.4	1.435	1,871	1,338
<b>2/0 (1330/30)</b>					
A3322004	2/0/4C	39.2	1.544	2,257	1,685
<b>3/0 (1665/30)</b>					
A3323004	3/0/4C	45.6	1.794	2,982	2,156
<b>4/0 (2109/30)</b>					
A3324004	4/0/4C	48.3	1.903	3,549	2,676

“Industrial duty power cable with TC-ER and Bus Drop rating for branch wiring from busways in accordance with NEC article 368.56 (B) ”.



# LUTZE DRIVEFLEX® XLPE (C) PVC, Shielded

## Flexible VFD Cable XHHW-2 with UL/TC-ER-JP/WTTC/CE Approvals



### Application

- Shielded motor supply cable to connect power to 3-phase motors, VFD's and Servo Drives
- Cable design for harsh industrial environments and operating conditions with high noise levels
- Thermoset XLPE offering superior overload and short-circuit temperature
- Type XHHW-2 insulation offering smaller ODs for general VFD applications
- Compliant with **NFPA 79** for wiring of industrial machinery
- **TC-ER-JP** for use with cable trays **without conduit**, which can reduce installation costs in industrial environments per NEC 336.10 (7)
- WTTC – wind turbine tray cable rating for use in wind power generation
- Dry, damp or wet conditions

### Characteristics

- Flexible XLPE conductor design
- Reduced cable OD's
- High insulation resistance
- Low capacitance cable
- Effective dual layer shield for EMC compliance
- Specially formulated jacket for oil resistance and easy strip design
- Sunlight resistant
- Direct burial
- Talc and Silicone free

### Technical Data

Voltage	600V 90C UL TC-ER-JP 1000V 90C Flexible VFD Servo Cable, 1000V 105C AWM 1000V WTTC
Temperature	-40°C - +105°C static
Bending radius	6 x cable OD
Conductor marking	Black with white numbers and one green/yellow ground
Oil resistance	Oil Res I/II
Approvals	UL Type Flexible VFD Servo Cable, TC-ER-JP*, WTTC, DP-1 Class I, II Div. 2 per NEC Art. 336, 392, 501, 502 Joist Pull per NEC 336.10(9)* AWM 20886 Submersible Pump (≥ AWG14) c(UL) TC, CIC FT4 UL 1277 Wet/Dry RoHS, REACH

### Construction

- AWG conductor
- Flexible fine wire stranded tinned copper conductors for improved electrical characteristics and reduced oxidation
- XLPE insulation XHHW-2, Wet/Dry
- Shielded with foil tape, tinned copper braid with ≥ 80% optical coverage, and drain wire
- Oil resistant PVC jacket
- Black jacket RAL 9005

Specifications are subject to change without prior notice  
\* JP starting productions 3/2017

Part No.	Description No. of conductors incl. ground	OD / Ø ca. mm	OD / Ø inches	Weight Lbs/Mft	Copper Lbs/Mft
<b>AWG 18 (19/30)</b>					
<b>A1061804</b>	AWG18/04C	10.5	0.415	108	42
<b>AWG 16 (26/30)</b>					
<b>A1061604</b>	AWG16/04C	10.8	0.425	124	54
<b>AWG 14 (41/30)</b>					
<b>A1061404</b>	AWG14/04C	11.6	0.456	154	76
<b>AWG 12 (65/30)</b>					
<b>A1061204</b>	AWG12/04C	13.0	0.51	208	118
<b>AWG 10 (105/30)</b>					
<b>A1061004</b>	AWG10/04C	16.5	0.650	320	183
<b>AWG 8 (168/30)</b>					
<b>A1060804</b>	AWG8/04C	20.6	0.81	478	279

"Small diameter general purpose VFD cable for applications with space restrictions such as conduit installations".



# LUTZE DRIVEFLEX® XLPE (C) PVC, Shielded

## Flexible VFD Cable XHHW-2 with Control Pair and UL/TC-ER-JP/WTTC/CE Approvals



### Application

- Shielded motor supply cable to connect power to 3-phase motors, VFD's and Servo Drives
- Cable design for harsh industrial environments and operating conditions with high noise levels
- Thermoset XLPE offering superior overload and short-circuit temperature
- Type XHHW-2 insulation offering smaller ODs for general VFD applications
- Compliant with **NFPA 79** for wiring of industrial machinery
- **TC-ER-JP** for use with cable trays **without conduit**, which can reduce installation costs in industrial environments per NEC 336.10 (7)
- WTTC – wind turbine tray cable rating for use in wind power generation
- Dry, damp or wet conditions

### Characteristics

- Flexible XLPE conductor design
- Reduced cable OD's
- High insulation resistance
- Low capacitance cable
- Effective dual layer shield for EMC compliance
- Specially formulated jacket for oil resistance and easy strip design
- Sunlight resistant
- Direct burial
- Talc and Silicone free

### Technical Data

Voltage	600V UL TC-ER-JP 1000V Flexible VFD Servo Cable 90C, 1000V 105C AWM 1000V WTTC
Temperature	-40°C - +90°C static
Bending radius	6 x cable OD
Conductor marking	Black with white numbers and one green/yellow ground
Oil resistance	Oil Res II
Approvals	UL Type Flexible VFD Servo Cable, TC-ER-JP*, WTTC, DP-1 Class I, II Div. 2 per NEC Art. 336, 392, 501, 502 Joist Pull per NEC 336.10(9)* AWM 20886 c(UL) TC, CIC FT4 UL 1277 Wet/Dry RoHS, REACH

### Construction

- AWG conductor
- Flexible fine wire stranded tinned copper conductors for improved electrical characteristics and reduced oxidation
- XLPE insulation XHHW-2, Wet/Dry
- Fillers for optimal roundness
- Shielded with foil tape, tinned copper braid with ≥ 80% optical coverage, and drain wire, one size smaller than circuit size
- Oil resistant PVC jacket
- Black jacket RAL 9005

Specifications are subject to change without prior notice  
\* JP starting productions 3/2017



## WITH ONE SHIELDED CONTROL PAIR

Part No.	Description No. of conductors incl. ground	OD / Ø ca. mm	OD / Ø inches	Weight Lbs/Mft	Copper Lbs/Mft
<b>AWG18 (19/30)</b>					
<b>A1071804</b>	AWG18/04C (19/30)+ 1 TSP AWG18 (19/30)	13.3	0.525	156	66
<b>AWG16 (26/30)</b>					
<b>A1071604</b>	AWG16/04C (26/30)+ 1 TSP AWG18 (19/30)	13.9	0.548	179	79
<b>AWG14 (14/30)</b>					
<b>A1071404</b>	AWG14/04C (41/30)+ 1 TSP AWG16 (26/30)	15.2	0.600	234	112
<b>AWG12 (65/30)</b>					
<b>A1071204</b>	AWG12/04C (65/30)+ 1 TSP AWG16 (26/30)	16.5	0.650	285	154
<b>AWG10 (105/30)</b>					
<b>A1071004</b>	AWG10/04C (105/30)+ 1 TSP AWG14 (41/30)	18.8	0.740	378	216
<b>AWG 8 (168/30)</b>					
<b>A1070804</b>	AWG8/04C (168/30)+ 1 TSP AWG14 (41/30)	24.0	0.945	605	314

"Small diameter general purpose VFD cable for applications with space restrictions such as conduit installations".





# LUTZE DRIVEFLEX® XLPE (C) PVC, Shielded

## Flexible VFD Cable Type RHW-2 with UL/TC-ER-JP/WTTC/CE Approvals



### Application

- Shielded multi-conductor cable for VFD and Motor applications to connect power from drives to motors
- Cable design for harsh industrial environments and operating conditions with high noise levels
- Thermoset XLPE insulation offering superior overload and short-circuit temperature
- Increased wall thickness insulation type RHW-2, offering lower capacitance and higher impedance making it ideal for applications with **high voltage spikes and long cable runs**
- Compliant with **NFPA 79** for wiring of industrial machinery
- **TC-ER-JP** for use with cable trays **without conduit**, which can reduce material and labor costs
- WTTC – wind turbine tray cable rating for use in wind power generation
- Dry, damp or wet conditions

### Characteristics

- Flexible XLPE conductor design
- Non-wicking fillers
- Effective dual layer shield for EMC compliance
- Specially formulated jacket for oil resistance and easy strip design
- Low capacitance cable
- Sunlight resistant
- Direct burial
- Talc and Silicone free


### Technical Data

Voltage	600V 90C UL TC-ER-JP 1000V 90C Flexible VFD Servo Cable, 1000V 105C AWM 1000V WTTC
Temperature	-40°C - +105°C static
Bending radius	6 x cable OD
Conductor marking	Black with white numbers and one green/yellow ground
Oil resistance	Oil Res II
Approvals	UL Type Flexible VFD Servo Cable, TC-ER-JP*, WTTC, DP-1 Class I, II Div. 2 per NEC Art. 336, 392, 501, 502 Joist Pull per NEC 336.10(9)* AWM 20886 Submersible Pump (≥AWG14) c(UL) TC, CIC FT4 UL 1277 Wet/Dry P-07-KA130021-MSHA RoHS, REACH

### Construction

- AWG conductor
- Flexible fine wire stranded tinned copper conductors for improved electrical characteristics and reduced oxidation
- XLPE insulation RHW-2, Wet/Dry
- Shielded with foil tape, tinned copper braid with ≥ 80% optical coverage, and drain wire
- Oil resistant PVC jacket
- Black jacket RAL 9005

Specifications are subject to change without prior notice  
\* JP starting productions 3/2017



Part No.	Description No. of conductors incl. ground	OD / Ø ca. mm	OD / Ø inches	Weight Lbs/Mft	Copper Lbs/Mft
<b>AWG 16 (26/30)</b>					
<b>A2161604</b>	AWG16/04C	12.4	0.490	149	57
<b>AWG 14 (41/30)</b>					
<b>A2161404</b>	AWG14/04C	14.2	0.560	200	80
<b>AWG 12 (65/30)</b>					
<b>A2161204</b>	AWG12/04C	15.6	0.615	262	128
<b>AWG 10 (105/30)</b>					
<b>A2161004</b>	AWG10/04C	17.8	0.700	359	186
<b>AWG 8 (168/30)</b>					
<b>A2160804</b>	AWG8/04C	23.5	0.925	603	295
<b>AWG 6 (266/30)</b>					
<b>A2160604</b>	AWG6/04C	25.7	1.010	763	425
<b>AWG 4 (413/30)</b>					
<b>A2160404</b>	AWG4/04C	29.3	1.155	1,126	632
<b>AWG 2 (665/30)</b>					
<b>A2160204</b>	AWG2/04C	34.2	1.345	1,559	997

"RHW-2 insulated VFD cable offering optimal capacitance and impedance values. Great for applications with long cable runs".



# LUTZE DRIVEFLEX® XLPE (C) Servo I PVC, Shielded

## Flexible Composite VFD, Servo & Motor Supply Cable with one Control Pair and UL/TC-ER-JP/WTTC/CE Approvals



### Application

- Shielded multi-conductor cable for VFD, Servo and Motor applications to connect power from drives to motors
- Cable design for harsh industrial environments and operating conditions with high noise levels
- XLPE thick wall insulation with low capacitance, ideal for applications with **high voltage spikes and long cable runs**
- Compliant with **NFPA 79** for wiring of industrial machinery
- **TC-ER-JP** for use with cable trays **without conduit**, which can reduce material and labor costs
- WTTC – wind turbine tray cable rating for use in wind power generation
- Dry, damp or wet conditions

### Characteristics

- Flexible XLPE conductor design
- Non-wicking fillers
- Effective dual layer shield for EMC compliance
- Specially formulated jacket for oil resistance and easy strip design
- Low capacitance cable
- Sunlight resistant
- Direct burial
- Talc and Silicone free

### Technical Data

Voltage	600V UL TC-ER-JP 1000V Flexible VFD Servo Cable 90C, 1000V 105C AWM 1000V WTTC
Temperature	-40°C - +90°C static
Minimum bending radius	6 x cable OD
Conductor marking	Black with white numbers and one green/yellow ground
Oil resistance	Oil Res II
Approvals	UL Type Flexible VFD Servo Cable, TC-ER-JP*, WTTC, DP-1 Class I, II Div. 2 per NEC Art. 336, 392, 501, 502 Joist Pull per NEC 336.10(9)* AWM 20886 c(UL) TC, CIC FT4 UL 1277 Wet/Dry P-07-KA130021-MSHA RoHS, REACH

### Construction

- AWG conductor
- Flexible fine wire stranded tinned copper conductors for improved electrical characteristics and reduced oxidation
- XLPE insulation, Wet/Dry (4C RHW-2, 1 Pair XHHW-2)
- Shielded with foil tape, tinned copper braid with ≥80% optical coverage, and drain wire
- Oil resistant PVC jacket
- Black jacket RAL 9005

Specifications are subject to change without prior notice  
\* JP starting productions 3/2017



## WITH ONE SHIELDED CONTROL PAIR

Part No.	Description No. of conductors incl. ground	OD / Ø ca. mm	OD / Ø inches	Weight Lbs/Mft	Copper Lbs/Mft
A2171604	AWG16/04C (26/30)+ 1 TSP AWG18 (19/30)	15.7	0.620	228	90
A2171404	AWG14/04C (41/30)+ 1 TSP AWG16 (26/30)	16.8	0.660	265	117
A2171204	AWG12/04C (65/30)+ 1 TSP AWG16 (26/30)	18.3	0.720	335	160
A2171004	AWG10/04C (105/30)+ 1 TSP AWG14 (41/30)	20.6	0.810	420	218
A2170804	AWG8/04C (168/30)+ 1 TSP AWG14 (41/30)	26.0	1.025	713	321
A2170604	AWG6/04C (266/30)+ 1 TSP AWG14 (41/30)	27.8	1.095	873	453
A2170404	AWG4/04C (413/30)+ 1 TSP AWG14 (41/30)	31.0	1.220	1,143	650
A2170204	AWG2/04C (665/30)+ 1 TSP AWG14 (41/30)	35.3	1.388	1,574	1,010

**TSP = Twisted  
Shielded Pair**

“RHW-2 insulated VFD cable offering optimal capacitance and impedance values. Great for applications with long cable runs”.



# LUTZE DRIVEFLEX® XLPE (C) Servo II PVC, Shielded

## Flexible Composite VFD, Servo & Motor Supply Cable with two Control Pairs and UL/TC-ER-JP/WTTC/CE Approvals



### Application

- Shielded multi-conductor cable for VFD, Servo and Motor applications to connect power from drives to motors
- Cable design for harsh industrial environments and operating conditions with high noise levels
- XLPE thick wall insulation with low capacitance, ideal for applications with **high voltage spikes and long cable runs**
- Compliant with **NFPA 79** for wiring of industrial machinery
- **TC-ER-JP** for use with cable trays **without conduit**, which can reduce material and labor costs
- WTTC – wind turbine tray cable rating for use in wind power generation
- Dry, damp or wet conditions

### Characteristics

- Flexible XLPE conductor design
- Non-wicking fillers
- Effective dual layer shield for EMC compliance
- Specially formulated jacket for oil resistance and easy strip design
- Low capacitance cable
- Sunlight resistant
- Direct burial
- UL Type TC-Exposed Run-Joist Pull
- Talc and Silicone free

### Technical Data

Voltage	600V UL TC-ER-JP 1000V Flexible VFD Servo Cable 90C, 1000V 105C AWM 1000V WTTC
Temperature	-40°C - +90°C static
Minimum bending radius	6 x cable OD
Conductor marking	Black with white numbers and one green/yellow ground
Oil resistance	Oil res II
Approvals	UL Type Flexible VFD Servo Cable, TC-ER-JP*, WTTC, DP-1 Class I, II Div. 2 per NEC Art. 336, 392, 501, 502 Joist Pull per NEC 336.10(9)* AWM 20886 c(UL) TC, CIC FT4 UL 1277 Wet/Dry P-07-KA130021-MSHA RoHS, REACH

### Construction

- AWG conductor
- Flexible fine wire stranded tinned copper conductors for improved electrical characteristics and reduced oxidation
- XLPE insulation, Wet/Dry (4C RHW-2, 2 Pairs XHHW-2)
- Shielded with foil tape, tinned copper braid with ≥ 80% optical coverage, and drain wire
- Oil resistant PVC jacket
- Black jacket RAL 9005

Specifications are subject to change without prior notice  
\* JP starting productions 3/2017



## WITH TWO SHIELDED CONTROL PAIRS

Part No.	Description No. of conductors incl. ground	OD / Ø ca. mm	OD / Ø inches	Weight Lbs/Mft	Copper Lbs/Mft
<b>A2181604</b>	AWG16/04C (26/30)+ 2 TSP AWG18 (19/30)	17.8	0.699	278	113
<b>A2181404</b>	AWG14/04C (41/30)+ 2 TSP AWG16 (26/30)	19.3	0.760	330	149
<b>A2181204</b>	AWG12/04C (65/30)+ 2 TSP AWG16 (26/30)	20.2	0.795	388	187
<b>A2181004</b>	AWG10/04C (105/30)+ 2 TSP AWG14 (41/30)	23.6	0.930	553	261
<b>A2180804</b>	AWG08/04C (168/30)+ 2 TSP AWG14 (41/30)	27.7	1.070	778	364

**TSP = Twisted  
Shielded Pair**

# LUTZE DRIVEFLEX® 3 Symmetrical Grounds, Shielded

## Flexible Composite VFD & Motor Supply Cable with Three Symmetrical Grounds and UL 1kV Voltage Rating



### Application

- Shielded VFD and Servo-Motor cable to connect power from drives to AC motors
- Three insulated symmetrical grounds design helps to reduce stray currents
- Cable design for harsh industrial environments and operating conditions with high noise levels
- 1 kV rated XLPE insulation with low capacitance, ideal for applications with **high voltage spikes and long cable runs**
- Compliant with **NFPA 79** for wiring of industrial machinery
- **TC-ER** for use with cable trays **without conduit**, which can reduce material and labor costs
- WTTC – wind turbine tray cable rating for use in wind power generation
- Dry, damp or wet conditions

### Characteristics

- Flexible XLPE conductors
- Three symmetrical, insulated grounds (PEs)
- Non-wicking fillers
- Effective dual layer shield for best EMC results
- Specially formulated jacket for oil resistance and easy strip design
- Low capacitance cable
- Sunlight resistant
- Direct burial
- Talc free and Silicone free


### Technical Data

Voltage	600V UL TC-ER 1000V Flexible VFD Servo Cable 90C 1000V WTTC
Temperature	-40°C - +90°C static
Minimum bending radius	7.5 x cable OD fixed
Conductor marking	Black with white numbers and three green/yellow ground
Approvals	UL Type "Flexible Motor Supply Cable (Flexible VFD Servo Cable)" (AWG6 to 4/0 only) UL Types WTTC, TC-ER c(UL) TC CIC FT4 CE Class I, II Div. 2 per NEC Art. 336, 392, 501, 502 UL 1277, UL2277 Oil res II Wet/Dry P-07-KA130021-MSHA RoHS REACH

### Construction

- AWG conductor
- Flexible fine wire stranded tinned copper conductors for improved electrical characteristics and reduced oxidation
- XLPE insulation, Wet/Dry XHHW-2 (3C Power + 3C Grounds/PEs)
- Shielded with foil tape, tinned copper braid with ≥80% optical coverage, and drain wire
- Oil resistant PVC jacket
- Black jacket RAL 9005

Specifications are subject to change without prior notice



## WITH THREE SYMMETRICAL GROUNDS (3 Power + 3 Protective Earth Grounds)

Part No.	Description Power Ground	OD / Ø ca. mm	OD / Ø inches	Weight Lbs/Mft	Copper Lbs/Mft
<b>A2200603</b>	AWG6/03C (206 strands)+ AWG12/03C (50 strands)	23.6	0.930	677	432
<b>A2200403</b>	AWG4/03C (322 strands)+ AWG12/03C (50 strands)	25.8	1.015	872	586
<b>A2200203</b>	AWG2/03C (511 strands)+ AWG10/03C (80 strands)	29.3	1.155	1,230	875
<b>A2200103</b>	AWG1/03C (644 strands)+ AWG8/03C (128 strands)	33.9	1.335	1,600	1,121
<b>A2201/003</b>	1/0/03C (812 strands)+ AWG8/03C (128 strands)	35.4	1.395	1,850	1,348
<b>A2202/003</b>	2/0/03C (1022 strands)+ AWG8/03C (128 strands)	38.1	1.500	2,187	1,620
<b>A2203/003</b>	3/0/03C (1288 strands)+ AWG6/03C (206 strands)	41.1	1.620	2,705	2,059
<b>A2204/003</b>	4/0/03C (1638 strands)+ AWG6/03C (206 strands)	47.4	1.865	3,336	2,461
<b>A22025003</b>	250MCM/03C* (1904 strands)+ AWG6/03C (206 strands)	50.3	1.980	3,815	2,851
<b>A22035003</b>	350MCM/03C* (2680 strands)+ AWG4/03C (322 strands)	56.4	2.220	5,153	3,993
<b>A22050003</b>	500MCM/03C* (3800 strands)+ AWG4/03C (322 strands)	63.6	2.505	6,803	5,397

\*1000V WTTC, 600V TC-ER only

"Three symmetrical grounds design can help to reduce shaft voltage and bearing currents. This design is recommended for larger motors 40HP or up".



# LUTZE DRIVEFLEX® CONTROL TSP XLPE (C) PVC, Shielded

## Twisted Shielded Pair Cable for Control Signals with UL/TC-ER/WTTC/CE Approvals



### Application

- Twisted shielded pair cable for VFD & Motor applications to transmit control signals from drives to motors
- Cable design for harsh industrial environments and operating conditions with high noise levels
- XLPE insulation with low capacitance
- **TC-ER** for use with cable trays **without conduit and alongside power cables**
- Separating control from power allows full ampacity rating of the power cable
- Compliant with **NFPA 79** for wiring of industrial machinery
- WTTC – wind turbine tray cable rating for use in wind power generation
- Dry, damp or wet conditions

### Characteristics

- Flexible XLPE conductor design
- Non-wicking fillers
- Effective dual layer shield for EMC compliance
- Specially formulated jacket for oil resistance and easy strip design
- Low capacitance cable
- Sunlight resistant
- Direct burial
- Talc and Silicone free

### Technical Data

Voltage	600V UL TC-ER 1000V Flexible VFD Servo Cable 1000V WTTC, 1000V 105C AWM
Temperature	-40°C - +90°C static
Bending radius	6 x cable OD
Conductor marking	Black with white number print
Oil resistance	Oil Res II
Approvals	UL Type "Flexible Motor Supply Cable (Flexible VFD Servo Cable)" UL Type TC-ER UL/CE WTTC Class I, II Div. 2 per NEC Art. 336, 392, 501, 502 AWM 20886 c(UL) TC CIC FT4 UL 1277 Wet/Dry RoHS REACH

### Construction

- AWG conductor
- Flexible fine wire stranded tinned copper conductors for improved electrical characteristics and reduced oxidation
- XLPE insulation XHHW-2, Wet/Dry
- Each pair shielded with foil tape, drain wire, tinned copper braid (≥ 80% optical coverage), then wrapped in clear foil
- Oil resistant PVC jacket
- Black jacket RAL 9005

Specifications are subject to change without prior notice

Part No.	Description No. of pairs	OD / Ø ca. mm	OD / Ø inches	Weight Lbs/Mft	Copper Lbs/Mft
<b>AWG 18 (16/30)</b>					
<b>A2441802</b>	AWG18/1TSP	8.7	0.344	77	29
<b>A2441804</b>	AWG18/2TSP	14.0	0.550	164	58
<b>AWG 16 (26/30)</b>					
<b>A2441602</b>	AWG16/1TSP	9.4	0.370	88	36
<b>A2441604</b>	AWG16/2TSP	15.5	0.610	189	73
<b>AWG 14 (41/30)</b>					
<b>A2441402</b>	AWG14/1TSP	10.2	0.400	108	51
<b>A2441404</b>	AWG14/2TSP	16.6	0.655	237	102

"TSP cable for motor control or brake application. 1000V rating allows installation alongside VFD cable. Separate jacketed pairs eliminate derating otherwise required for composite power cables per NEC 310.15(B)(3)(a)".





# LUTZE SILFLEX® M (C) Motor TPE, Shielded

Flexible Motor Cable with UL/TC-ER/WTTC/MTW/CE Approvals  
Similar to Allen-Bradley® 2090 and other servo system cables



## Application

- Bulk cable similar to Allen-Bradley® 2090 and other servo system cables for stationary applications and installation in cable trays.
- Cable design for harsh industrial environments and operating conditions with high noise levels
- Improved insulation design with additional conductor stress relief layer as a power distortion suppressant
- Compliant with NFPA 79 for machine tool wiring
- TC-ER for use with cable trays without conduit, which can reduce material and labor costs
- Dry, damp and wet locations

## Characteristics

- Improved design with conductor stress relief layer helps to prevent premature cable failure and reduces corona effects, increasing reliability and lifetime
- Flexible design with Nylon for crush impact resistance per UL 1277 and easy installation
- Very round cable with small diameter
- Specially formulated TPE jacket for superior oil resistance per Oil Res I and II
- Resistant to many mineral and vegetable based cutting oils
- Non-wicking fillers
- Sunlight resistant
- Direct burial
- UL Type TC-Exposed Run
- Talc and Silicone free

## Technical Data

Voltage	600V UL TC 600V UL MTW 1000V WTTC 1000V Flexible Motor Supply
Temperature	600V UL AWM 105C -40°C - +90°C (105C)
Bending radius	6 x cable OD
Conductor marking	Power: brown, black, blue Ground: green/yellow Control pair: black/white
Approvals	UL Flexible Motor Supply Cable UL TC-ER UL/AWM/CE UL MTW WTTC UL AWM Style 20328 Class I, II Div. 2 per NEC Art. 336, 392, 501, 502 c(UL) TC CIC FT4 UL 1277 Oil Res I and II RoHS REACH

## Construction

- AWG conductor
- Flexible fine wire stranded bare copper conductors
- PVC/Nylon insulation with conductor stress relief layer
- Shielded with tinned copper braid, optical coverage ≥ 85%
- Oil resistant orange TPE jacket

Allen-Bradley® article designations are registered trademarks.  
Specifications are subject to change without prior notice

Part No.	Description No. of conductors incl. ground	OD - Ø ca. mm	OD - Ø inches	Weight Lbs/Mft	Copper Lbs/Mft
	<b>AWG 16 (26/30)</b>				
<b>A3161604</b>	AWG16/04C	10.5	0.410	124	50
	<b>AWG 14 (41/30)</b>				
<b>A3161404</b>	AWG14/04C	11.6	0.455	159	71
	<b>AWG 12 (65/30)</b>				
<b>A3161204</b>	AWG12/04C	13.1	0.510	214	107
	<b>AWG 10 (105/30)</b>				
<b>A3161004</b>	AWG10/04C	16.5	0.650	321	161
	<b>AWG 8 (168/30)</b>				
<b>A3160804</b>	AWG8/04C	21.0	0.825	490	267

## WITH ONE SHIELDED CONTROL PAIR

	<b>AWG 16 (26/30)</b>				
<b>A3171604</b>	AWG16/04C+ 1 TSP AWG18	12.1	0.477	161	72
	<b>AWG 14 (41/30)</b>				
<b>A3171404</b>	AWG14/04C+ 1 TSP AWG18	12.8	0.505	196	92
	<b>AWG 12 (65/30)</b>				
<b>A3171204</b>	AWG12/04C+ 1 TSP AWG18	15.0	0.590	263	128
	<b>AWG 10 (105/30)</b>				
<b>A3171004</b>	AWG10/04C+ 1 TSP AWG18	18.1	0.716	380	191
	<b>AWG 8 (168/30)</b>				
<b>A3170804</b>	AWG8/04C+ 1 TSP AWG18	22.5	0.890	568	285
	<b>AWG 6 (266/30)</b>				
<b>A3170604</b>	AWG6/04C+ 1 TSP AWG18	25.5	1.003	786	417
	<b>AWG 4 (413/30)</b>				
<b>A3170404</b>	AWG4/04C+ 1 TSP AWG16	29.5	1.162	1119	613
	<b>AWG 2 (665/30)</b>				
<b>A3170204</b>	AWG2/04C+ 1 TSP AWG16	34.1	1.340	1543	983

**TSP = Twisted  
Shielded Pair**

For standard three phase VFD applications, please refer to LUTZE DRIVEFLEX® cable series.

1-800-447-2371



www.lutze.com

# LUTZE SILFLEX® (C) TPE Feedback, Shielded

## Flexible Feedback Cable for Allen-Bradley® and other Systems



### Application

- Incremental encoder cable and resolver cable for tacho sensor, brake sensor, speed sensor
- Cable design for harsh industrial environments and operating conditions with high noise level
- UL listed and NFPA 79 compliant
- Dry, damp and wet locations

### Characteristics

- High active and passive interference resistance (EMC)
- Flexible for easy installation
- Specially formulated TPE jacket for superior oil resistance according to UL1581
- Resistant to many mineral & vegetable based cutting oils
- Non-wicking fillers
- Extended temperature range and premium durability
- Sunlight resistant
- Talc and Silicone free

### Technical Data

Nominal Voltage	300V UL PLTC-ER 300V UL CM 600V UL AWM 90C
Test voltage	1.5 kV
Temperature range	-40°C to + 90°C static
Bending radius	6 x cable OD static
Burning behavior	Flame retardant per UL Vertical-Tray UL VW-1
Oil resistance	UL1581 4 days in Oil at 100°C 60 days in Oil at 75°C
Approvals	A1410001: UL PLTC-ER, meets NEC 725 Class I, II Div. 2 per NEC Art. 336, 392, 501, 502 A1410002: UL CM, meets NEC 800 Both: UL AWM Style 20626 CE RoHS REACH

### Construction

- AWG conductor
- Flexible fine wire stranded tinned copper conductors
- Special PVC conductor insulation
- Conductors color-coded for specific system
- Shielded with foil tape, drain wire and tinned copper braid shield, optical coverage ≥ 85 %
- Extremely oil resistant TPE jacket
- Green jacket similar RAL 6018

Additional feedback cables for other systems available. Please contact us for further information.

Allen-Bradley® is a registered trademark.  
Specifications are subject to change without prior notice

Part No.	Description No. of conductors	OD / Ø ca. mm	OD / Ø inches	Weight Lbs/Mft	Copper Lbs/Mft
----------	----------------------------------	------------------	------------------	-------------------	-------------------

### For Allen-Bradley® System and similar

<b>A1410001</b>	(5x2xAWG22) BK/BKWH, RD/RDWH, GN/GNWH, GY/GYWH, OG/OGWH	10.0	0.395	102	40
<b>A1410002</b>	(1x2xAWG16+1x2xAWG22+6x2xAWG26) AWG16: GY/GYWH AWG22: OG/OGWH AWG26: BK/BKWH, RD/RDWH, GN/GNWH, BL/BLWH, BN/BNWH, YE/YEWH	11.8	0.465	143	54

# LUTZE SUPERFLEX® Plus M PUR 0.6/1kV, Unshielded

## High Flexing Motor Cable with UL/CE Approvals



### Application

- High flexible multi-conductor cable for continuous moving applications such as machine tools, handling equipment and processing machines
- Designed for demanding industrial C-track applications
- Compatible with all major brand C-tracks

### Characteristics

- Super finely stranded per Class 6 for continuous moving applications
- TPE conductor insulation
- Low capacitance
- PUR jacket
- Highest level of resistance against cooling fluids, greases and oils
- Abrasion and hydrolysis resistant, low water absorption
- UV resistant
- Non-wicking fillers
- Talc and Silicone free

### Technical Data

Voltage	1000V UL AWM U <sub>0</sub> /U 0.6/1kV
Temperature	Moving -25°C - +80°C Fixed -40°C - +80°C
Minimum bending radius	Moving 7.5 x cable OD Fixed 4 x cable OD
Conductor marking	Black with white numbers and one green/yellow ground
Isolation resistance	Min 100MΩ x km
Burning behavior	Flame retardant per DIN EN 60322-1-2 IEC 60332-1 UL section VW-1 FT1
Halogen free	According to DIN EN 60754-1
Oil resistance	Oil Res II
Approvals	UL AWM Style 21223 RoHS REACH

### Construction


- Metric conductor
- Bare copper wire super finely stranded per DIN VDE 0295 Class 6 and IEC 60228 Class 6
- Special TPE conductor insulation
- G: with GNYE ground conductor  
x: without ground conductor
- Layer pitch optimized
- Fleece wrap over cabled conductor
- Extremely oil resistant PUR jacket
- Black jacket RAL 9005

Specifications are subject to change without prior notice

Part No.	Description No. of conductors incl. ground	OD / Ø ca. mm	OD / Ø inches	Weight Lbs/Mft	Copper Lbs/Mft
<b>AWG 16 / 1.5 mm<sup>2</sup></b>					
111370	4G1.5	8.2	0.323	81	39
<b>AWG 14 / 2.5 mm<sup>2</sup></b>					
111371	4G2.5	10.0	0.394	96	64
<b>AWG 12 / 4 mm<sup>2</sup></b>					
111372	4G4	11.6	0.457	156	103
111545	5G4	13.0	0.512	192	130
<b>AWG 10 / 6 mm<sup>2</sup></b>					
111373	4G6	13.6	0.535	220	155
111430	5G6	14.4	0.567	269	194
<b>AWG 8 / 10 mm<sup>2</sup></b>					
111374	4G10	16.8	0.661	352	257
111429	5G10	18.8	0.740	504	329
<b>AWG 6 / 16 mm<sup>2</sup></b>					
111375	4G16	20.4	0.803	663	411
111548	5G16	24.2	0.953	784	516
<b>AWG 4 / 25 mm<sup>2</sup></b>					
111376	4G25	24.2	0.953	804	643
<b>AWG 2 / 35 mm<sup>2</sup></b>					
111377	4G35	30.5	1.201	1,240	901
<b>AWG 1 / 50 mm<sup>2</sup></b>					
111378	4G50	36.5	1.437	1,642	1,286

# LUTZE SUPERFLEX® Plus M (C) PUR 0.6/1kV, Shielded

## High Flexing Motor Cable with UL/CE/DESINA Approvals



### Application

- High flexing Servo Motor, Motor and VFD Cable for continuous flexing applications
- Suitable for applications with extremely rough operating conditions and oil exposure
- Designed for demanding industrial C-track applications
- For Siemens (6FX8008) and similar systems
- Compatible with all major brand C-tracks

### Characteristics

- Super finely stranded per class 6 for continuous moving applications
- Reduced friction and low capacitance
- Highest level of resistance against cooling fluids, greases and oils
- Abrasion and hydrolysis resistant, low water absorption
- UV resistant
- Non-wicking fillers
- Talc and Silicone free

### Technical Data

Voltage	1000V UL AWM U <sub>0</sub> /U 0.6/1kV
Temperature	Moving -25°C - +80°C Fixed -40°C - +80°C
Minimum bending radius	Moving 10 x cable OD Fixed 6 x cable OD
Conductor marking	Black with white numbers and one green/yellow ground
Isolation resistance	Min. 500MΩ x km
Burning behavior	Flame retardant per DIN EN 60332-1-2 IEC 60332-1 UL 1581 section VW-1 FT1
Halogen free	According to DIN EN 60754-1
Oil resistance	Oil Res II
Approvals	UL AWM Style 21223 RoHS REACH

Part No.	Description No. of conductors incl. ground	Siemens Designation	OD / Ø ca. mm	OD / Ø inches	Weight Lbs/Mft	Copper Lbs/Mft
<b>AWG18 / 1.0 mm<sup>2</sup></b>						
111879	(4G1.0)	-	7.4	0.291	72.6	44
<b>AWG 16 / 1.5 mm<sup>2</sup></b>						
111460	(4G1.5)	1BB11*	8.6	0.339	78.6	56
<b>AWG 14 / 2.5 mm<sup>2</sup></b>						
111461	(4G2.5)	1BB21*	10.8	0.425	116.3	87
<b>AWG 12 / 4 mm<sup>2</sup></b>						
111462	(4G4)	1BB31*	12.2	0.480	164.6	129
<b>AWG 10 / 6 mm<sup>2</sup></b>						
111463	(4G6)	1BB41*	14.0	0.551	245.3	185
<b>AWG 8 / 10 mm<sup>2</sup></b>						
111464	(4G10)	1BB51*	17.6	0.693	368.9	302
<b>AWG 6 / 16 mm<sup>2</sup></b>						
111465	(4G16)	1BB61*	21.2	0.835	570.5	484
<b>AWG 4 / 25 mm<sup>2</sup></b>						
111466	(4G25)	1BB25*	25.0	0.984	872.9	726
<b>AWG 2 / 35 mm<sup>2</sup></b>						
111467	(4G35)	1BB35*	28.8	1.134	1,136.9	1,024
<b>AWG 1 / 50 mm<sup>2</sup></b>						
111468	(4G50)	1BB50*	33.9	1.335	1,640.9	1,457

### Construction

- Metric conductor
- Bare copper wire super finely stranded per DIN VDE 0295 class 6 and IEC 60228 class 6
- Special TPE conductor insulation
- G: with GNYE ground conductor  
x: without ground conductor
- Tinned copper braid shield
- Extremely oil resistant PUR jacket
- Orange jacket RAL 2003

\*SIEMENS article designations are registered trademarks of SIEMENS AG. Specifications are subject to change without prior notice



# LUTZE SUPERFLEX® Plus M (C) PUR 0.6/1kV, Shielded

## High Flexing Composite Motor Cable with UL/CE/DESINA Approvals



### Application

- High flexing Servo Motor, Motor and VFD Cable for continuous flexing applications
- Suitable for applications with extremely rough operating conditions and oil exposure
- Designed for demanding industrial C-track applications
- With one control pair for SIEMENS (6FX8008) and similar systems
- Compatible with all major brand C-tracks

### Characteristics

- Super finely stranded per class 6 for continuous moving applications
- Reduced friction
- Low capacitance
- Highest level of resistance against cooling fluids, greases and oils
- Abrasion and hydrolysis resistant, low water absorption
- UV resistant
- Non-wicking fillers
- Talc and Silicone free

### Technical Data

Voltage	1000V UL AWM U <sub>0</sub> /U 0.6/1kV
Temperature	Moving -25°C - +80°C Fixed -40°C - +80°C
Minimum bending radius	Moving 10 x cable OD Fixed 6 x cable OD
Conductor marking	Black with white numbers and one green/yellow ground
Isolation resistance	Min. 500MΩ x km
Burning behavior	Flame retardant per DIN EN 60332-1-2 IEC 60332-1 UL 1581 section VW-1 FT1
Halogen free	According to DIN EN 60754-1
Oil resistance	Oil Res II
Approvals	UL AWM Style 21223 RoHS REACH

### Construction

- Metric conductor
- Bare copper wire super finely stranded per DIN VDE 0295 class 6 and IEC 60228 class 6
- Special TPE conductor insulation
- G: with GNYE ground conductor  
x: without ground conductor
- Control pair individually shielded with foil and braid
- Control pair color-coded (bk, wh)
- Layer pitch optimized
- Fleece wrap over cabled conductors
- Tinned copper braid shield, optical coverage ≥ 85 %
- Extremely oil resistant PUR jacket
- Orange jacket RAL 2003

\*SIEMENS article designations are registered trademarks of SIEMENS AG.  
Specifications are subject to change without prior notice

## WITH ONE CONTROL PAIR

Part No.	Description No. of conductors incl. ground	Siemens Designation	OD / Ø ca. mm	OD / Ø inches	Weight Lbs/Mft	Copper Lbs/Mft
<b>AWG 16 / 1.5 mm<sup>2</sup></b>						
111420	(4G1.5 + (2x1.5))	1BA11*	11.4	0.449	141	100
<b>AWG 14 / 2.5 mm<sup>2</sup></b>						
111421	(4G2.5 + (2x1.5))	1BA21*	12.9	0.508	158	130
<b>AWG 12 / 4 mm<sup>2</sup></b>						
111422	(4G4 + (2x1.5))	1BA31*	14.5	0.571	215	171
<b>AWG 10 / 6 mm<sup>2</sup></b>						
111423	(4G6 + (2x1.5))	1BA41*	16.1	0.634	289	228
<b>AWG 8 / 10 mm<sup>2</sup></b>						
111424	(4G10 + (2x1.5))	1BA51*	19.5	0.768	457	353
<b>AWG 6 / 16 mm<sup>2</sup></b>						
111425	(4G16 + (2x1.5))	1BA61*	23.6	0.929	642	519
<b>AWG 4 / 25 mm<sup>2</sup></b>						
111426	(4G25 + (2x1.5))	1BA25*	28.5	1.122	917	761
<b>AWG 2 / 35 mm<sup>2</sup></b>						
111427	(4G35 + (2x1.5))	1BA35*	31.0	1.220	1,845	1,068
<b>AWG 1 / 50 mm<sup>2</sup></b>						
111428	(4G50 + (2x1.5))	1BA50*	34.5	1.358	2,511	1,505

# LUTZE SUPERFLEX® Plus M (C) PUR 0.6/1kV, Shielded

## High Flexing Composite Motor Cable with UL/CE/DESINA Approvals



### Application

- High flexing Servo Motor, Motor and VFD Cable for continuous flexing applications
- Suitable for applications with extremely rough operating conditions and oil exposure
- Designed for demanding industrial C-track applications
- With two control pairs for Indramat / Bosch Rexroth and similar systems
- Compatible with all major brand C-tracks

### Characteristics

- Super finely stranded per Class 6 for continuous moving applications
- Reduced friction
- Low capacitance
- Highest level of resistance against cooling fluids, greases and oils
- Abrasion and hydrolysis resistant, low water absorption
- UV resistant
- Non-wicking fillers
- Talc and Silicone free

### Technical Data

Voltage	1000V UL AWM U <sub>0</sub> /U 0.6/1kV
Temperature	Moving -25°C - +80°C Fixed -40°C - +80°C
Minimum bending radius	Moving 10 x cable OD Fixed 6 x cable OD
Conductor marking	Black with white numbers and one green/yellow ground
Isolation resistance	Min 500MΩ x km
Burning behavior	Flame retardant per DIN EN 60332-1-2 IEC 60332-1 UL 1581 section VW-1 FT1
Halogen free	According to DIN EN 60754-1
Oil resistance	Oil Res II
Approvals	UL AWM Style 21223 RoHS REACH

### Construction

- Metric conductor
- Bare copper wire super finely stranded per DIN VDE 0295 class 6 and IEC 60228 class 6
- Special TPE conductor insulation
- G: with GNYE ground conductor  
x: without ground conductor
- Control pairs individually shielded with foil and braid
- Control pairs number printed (5,6)(7,8)
- Layer pitch optimized
- Fleece wrap over cabled conductors
- Tinned copper braid shield, optical coverage ≥ 85 %
- Extremely oil resistant PUR jacket
- Orange jacket RAL 2003

\*Indramat article designations are registered trademarks  
Specifications are subject to change without prior notice

## WITH TWO CONTROL PAIRS

Part No.	Description No. of conductors incl. ground	Indramat Designation*	OD / Ø ca. mm	OD / Ø inches	Weight Lbs/Mft	Copper Lbs/Mft
<b>AWG 18 / 1.0 mm<sup>2</sup></b>						
111270	(4G1.0+ 2x(2x0.75))	INK 0653*	12.5	0.492	155	93
<b>AWG 16 / 1.5 mm<sup>2</sup></b>						
111271	(4G1.5+ 2x(2x0.75))	INK 0650*	12.9	0.508	171	109
<b>AWG 14 / 2.5 mm<sup>2</sup></b>						
111279	(4G2.5+ 2x(2x1.0))	INK 0602*	14.2	0.559	221	152
<b>AWG 12 / 4 mm<sup>2</sup></b>						
111388	(4G4+(2x1.0)+ (2x1.5))	INK 0603*	16.3	0.642	255	221
<b>AWG 10 / 6 mm<sup>2</sup></b>						
111998	(4G6+(2x1.0)+ (2x1.5))	INK 0604*	18.4	0.724	355	258
<b>AWG 8 / 10 mm<sup>2</sup></b>						
111762	(4G10+(2x1.0)+ (2x1.5))	INK 0605*	22.3	0.878	513	383
<b>AWG 6 / 16 mm<sup>2</sup></b>						
111276	(4G16+2x(2x1.5))	INK 0606*	26.8	1.055	714	598
<b>AWG 4 / 25 mm<sup>2</sup></b>						
111277	(4G25+2x(2x1.5))	INK 0607*	29.3	1.154	1,151	847
<b>AWG 2 / 35 mm<sup>2</sup></b>						
111278	(4G35+2x(2x1.5))	INK 0667*	32.5	1.280	1,462	1,102

# LUTZE SUPERFLEX® Plus PUR 0.6/1kV, Unshielded

## High Flexing Single Conductor Motor Cable 0.6/1kV, Unshielded



### Application

- Performance flexing cable, specifically suitable for machine and device construction for transport and conveyor technology
- As motor supply or ground conductor
- Optimally suited for C-tracks in extremely harsh operating conditions
- Compatible with all major brand C-tracks

### Characteristics

- Very good alternating bending strength
- Good pressure and roll-over resistance
- Super finely stranded per class 6 for continuous moving applications
- TPE insulation with very high break through resistance
- PUR jacket for highest level of resistance against cooling fluids, greases and oils
- Abrasion and hydrolysis resistant, low water absorption
- UV resistant
- Talc and Silicone free

### Technical Data

Voltage	U <sub>0</sub> /U 0.6/1kV
Test voltage	4000V
Temperature	Moving -25°C - +80°C Fixed -40°C - +80°C
Minimum bending radius	Moving 7.5 x cable OD Fixed 4 x cable OD
Isolation resistance	Min. 200MΩ x km
Burning behavior	Flame retardant per DIN EN 60332-1-2 IEC 60332-1 UL 1581 section VW-1 FT 1
Halogen free	According to DIN EN 60754-1
Oil resistance	Oil Res II
Approvals	UL AWM Style 10587 RoHS REACH

### Construction

- Metric conductor
- Bare copper wire super finely stranded per DIN VDE 0295 class 6 and IEC 60228 class 6
- Special TPE conductor insulation
- Extremely oil resistant PUR jacket
- Black jacket RAL 9005

Specifications are subject to change without prior notice

Part No.	Description No. of conductors	OD / Ø ca. mm	OD / Ø inches	Weight Lbs/Mft	Copper Lbs/Mft
<b>AWG 10 / 6 mm<sup>2</sup></b>					
111136	1x6	7.1	0.279	61	38
<b>AWG 8 / 10 mm<sup>2</sup></b>					
111126	1x10	8.4	0.331	93	62
<b>AWG 6 / 16 mm<sup>2</sup></b>					
111127	1x16	9.8	0.386	138	99
<b>AWG 4 / 25 mm<sup>2</sup></b>					
111128	1x25	11.4	0.449	206	157
<b>AWG 2 / 35 mm<sup>2</sup></b>					
111129	1x35	13.4	0.528	290	219
<b>AWG 1 / 50 mm<sup>2</sup></b>					
111130	1x50	15.2	0.598	384	321
<b>2/0 / 70 mm<sup>2</sup></b>					
111131	1x70	16.6	0.654	526	433
<b>3/0 / 95 mm<sup>2</sup></b>					
111132	1x95	19.2	0.756	701	597
<b>4/0 / 120 mm<sup>2</sup></b>					
111133	1x120	22.6	0.890	874	806
<b>Green/Yellow jacket</b>					
<b>AWG 8 / 10 mm<sup>2</sup></b>					
111243	1x10	8.4	0.331	93	62
<b>AWG 6 / 16 mm<sup>2</sup></b>					
111197	1x16	9.8	0.386	138	99
<b>AWG 4 / 25 mm<sup>2</sup></b>					
111337	1x25	11.4	0.449	206	157
<b>AWG 2 / 35 mm<sup>2</sup></b>					
111285	1x35	13.4	0.528	290	219

# LUTZE SUPERFLEX® Plus (C) PUR 0.6/1kV, Shielded

## High Flexing Single Conductor Motor Cable 0.6/1kV



### Application

- Performance flexing cable, specifically suitable for machine and device construction for transport and conveyor technology
- As motor supply or ground conductor
- Optimally suited for C-tracks in extremely harsh operating conditions
- Compatible with all major brand C-tracks

### Characteristics

- Very good alternating bending strength
- Good pressure and roll-over resistance
- Super finely stranded per class 6 for continuous moving applications
- TPE insulation with very high break through resistance
- PUR jacket for highest level of resistance against cooling fluids, greases and oils
- Abrasion and hydrolysis resistant, low water absorption
- UV resistant
- Talc and Silicone free

### Technical Data

Voltage	U <sub>0</sub> /U 0.6/1kV
Test Voltage	4000V
Temperature	Moving -25°C - +80°C Fixed -40°C - +80°C
Minimum bending radius	Moving 7.5 x cable OD Fixed 4 x cable OD
Isolation resistance	Min. 200MΩ x km
Burning behavior	Flame retardant per DIN EN 60332-1-2 IEC 60332-1 UL 1581 section VW-1 FT 1
Halogen free	According to DIN EN 60754-1
Oil resistance	Oil Res II
Approvals	UL AWM Style 10587 RoHS REACH

### Construction

- Metric conductor
- Bare copper super finely stranded per DIN VDE 0295 class 6 and IEC 60228 class 6
- Special TPE conductor insulation
- Fleece wrap
- Tinned copper braid shield, optical coverage ≥ 85 %
- Extremely oil resistant PUR jacket
- Black jacket RAL 9005

Specifications are subject to change without prior notice

Part No.	Description No. of conductors	OD / Ø ca. mm	OD / Ø inches	Weight Lbs/Mft	Copper Lbs/Mft
	<b>AWG 10 / 6 mm<sup>2</sup></b>				
111288	(1x6)	7.7	0.303	77	52
	<b>AWG 8 / 10 mm<sup>2</sup></b>				
111289	(1x10)	9.0	0.354	115	81
	<b>AWG 6 / 16 mm<sup>2</sup></b>				
111290	(1x16)	10.4	0.409	162	121
	<b>AWG 4 / 25 mm<sup>2</sup></b>				
111291	(1x25)	12.0	0.472	237	183
	<b>AWG 2 / 35 mm<sup>2</sup></b>				
111292	(1x35)	14.0	0.551	323	250
	<b>AWG 1 / 50 mm<sup>2</sup></b>				
111293	(1x50)	15.8	0.622	424	356
	<b>2/0 / 70 mm<sup>2</sup></b>				
111294	(1x70)	17.4	0.685	573	473
	<b>3/0 / 95 mm<sup>2</sup></b>				
111295	(1x95)	20.2	0.795	770	657
	<b>4/0 / 120 mm<sup>2</sup></b>				
111296	(1x120)	23.6	0.929	962	884



# LUTZE SUPERFLEX® Plus (C) PUR Feedback, Shielded

## High Flexing Feedback Cable for Bosch-Rexroth and other Systems



### Application

- Incremental encoder cable, termination cable for tachometer, brake sensor, speed sensor
- Full PUR jacket and TPE cable insulation optimally suited for C-tracks, extremely harsh operating conditions, aggressive coolants and lubricants
- Especially for industrial environments, machines and plants

### Characteristics

- High active and passive interference resistance (EMC)
- Special braided shield, optimized for continuous flexing
- Very good alternating bending strength, for continuous flexing
- Low adhesion, abrasion-resistant, nick-resistant, tear-resistant
- Hydrolysis-resistant, microbe-resistant, and rot-resistant
- Resistant to weather, ozone and UV resistant
- Salt water resistant
- Excellent coolant and lubricant resistance
- Resistant to most oils, greases, alcohol-free benzenes and kerosene (see tech. information)
- Talc and Silicone free

### Technical Data

UL-Approval	AWM 20233
Voltage	300V 80°C
Test voltage	2000V
Insulation resistance	Min. 2000MΩ x km
Temperature range	Moving -25°C - +80°C Fixed -40°C - +80°C
Minimum bending radius	Moving 12 x cable OD Fixed 6 x cable OD
Burning behavior	Flame retardant per DIN EN 60332-1-2 IEC 60332-1 UL 1581 section VW-1 FT 1
Halogen free	According to DIN EN 60754-1
Approvals	RoHS REACH

### Construction

- Metric conductor
- Bare copper wire super finely stranded per DIN VDE 0295 class 6 and IEC 60228 class 6
- Special TPE conductor insulation
- G: with GNYE ground conductor  
x: without ground conductor
- Conductors color-coded for specific system
- Layer pitch optimized
- Fleece wrap over cabled conductors
- Tinned copper braid shield, optical coverage ≥ 85 %
- Extremely oil resistant PUR jacket
- Orange jacket RAL 2003

Additional feedback cables for other systems available. Please contact us for further information.

\*Bosch Rexroth article designations are registered trademarks  
Specifications are subject to change without prior notice

Part No.	Description No. of conductors incl. ground	INK* Description ca.	OD / Ø mm	OD / Ø inches	Weight Lbs/Mft	Copper Lbs/Mft
----------	--	-------------------------	--------------	------------------	-------------------	-------------------

### For Bosch-Rexroth System and similar

110941	(2×1.0+4×2×0.25) 1.0: WH, BN 0.25: BN/GN, GY/PK, BU/VT, RD/BK	INK-0209*	8.9	0.350	81	43
111780	(2×0.5+4×2×0.25) 0.5: WH, BN 0.25: BN/GN, GN/PK, BU/VT, RD/BK	INK-0448*	8.7	0.343	67	40
110940	(9×0.5) Strand color according to DIN 47100	INK-0208*	8.8	0.346	84	50
111495	(4×1.0+4×2×0.14+(4×0.14)) 1.0: BU, WHGN, BNGN, WH 0.14: GY/PK, YE/VT, GN/BN, RD/BK (0.14): GNBK, BUBK, YEBK, RDBK	INK-0532*	9.5	0.374	92	65
111781	(2×0.5+2×2×0.25) 0.5: WH, BN 0.25: RD/BK, GY/PK	INK-0750*	7.6	0.299	60	28

# LUTZE SUPERFLEX® Plus (C) PUR Feedback, Shielded

## High Flexing Feedback Cable for Allen-Bradley® and other Systems



### Application

- Incremental encoder cable, termination cable for tachometer, brake sensor, speed sensor
- Full PUR jacket and special TPE cable insulation optimally suited for C-tracks, extremely harsh operating conditions, aggressive coolants and lubricants
- Especially for industrial environments, machines and plants

### Characteristics

- High active and passive interference resistance (EMC)
- Special braided shield, optimized for continuous flexing
- Very good alternating bending strength, for continuous flexing
- Low adhesion, abrasion-resistant, nick-resistant, tear-resistant
- Hydrolysis-resistant, microbe-resistant, and rot-resistant
- Resistant to weather, ozone and UV resistant
- Salt water resistant
- Excellent coolant and lubricant resistance
- Resistant to most oils, greases, alcohol-free benzenes and kerosene (see technical information)
- Talc and Silicone free

### Technical Data

UL-Approval	AWM 21223
Nominal Voltage	1000V 80°C
Test voltage	3000V
Insulation resistance	Min. 100MΩ x km
Temperature range	Moving -25°C - +80°C Fixed -40°C - +80°C
Minimum bending radius	Moving 10 x cable OD Fixed 6 x cable OD
Burning behavior	Flame retardant per DIN EN 60332-1-2 IEC 60332-1 UL 1581 section VW-1 FT 1
Halogen free	According to DIN EN 60754-1

### Construction

- Metric conductor
- Bare copper wire super finely stranded per DIN VDE 0295 class 6 and IEC 60228 class 6
- Special TPE conductor insulation
- G: with GNYE ground conductor  
x: without ground conductor
- Conductors color-coded for specific system
- Layer pitch optimized
- Fleece wrap over cabled conductors
- Tinned copper braid shield, optical coverage ≥ 85 %
- Extremely oil resistant PUR jacket
- Green jacket RAL 6018

Additional feedback cables for other systems available. Please contact us for further information.

Allen Bradley® is a registered trademark  
Specifications are subject to change without prior notice

Part No.	Description No. of conductors incl. ground	OD / Ø ca. mm	OD / Ø inches	Weight Lbs/Mft	Copper Lbs/Mft
----------	--	------------------	------------------	-------------------	-------------------

### For Allen-Bradley® System and similar

<b>111488</b>	(5x2xAWG22) BKWH/BK, RDWH/RD, GNWH/GN, GYWH/GY, OGWH/OG	9.2	0.362	72	36
<b>111489</b>	(2xAWG16+2xAWG22+6x2xAWG26) AWG16: GY, WHGY AWG22: OG, WHOG AWG26: BKWH/BK, RDWH/RD, GNWH/GN, BNWH/BN, YEWY/YE, BUWH/BU	10.8	0.425	121	81

# LUTZE SUPERFLEX® Plus (C) PUR Feedback, Shielded

## High Flexing Feedback Cable for Siemens and other Systems



### Application

- Incremental encoder cable, termination cable for tachometer, brake sensor, speed sensor
- Full PUR jacket and TPE cable insulation optimally suited for C-tracks, extremely harsh operating conditions, aggressive coolants and lubricants
- Especially for industrial environments, machines and plants

### Characteristics

- High active and passive interference resistance (EMC)
- Special braided shield, optimized for continuous flexing
- Very good alternating bending strength, for continuous flexing
- Low adhesion, abrasion-resistant, nick-resistant, tear-resistant
- Hydrolysis-resistant, microbe-resistant, and rot-resistant
- Resistant to weather, ozone and UV resistant
- Salt water resistant
- Excellent coolant and lubricant resistance
- Resistant to most oils, greases, alcohol-free benzenes and kerosene (see tech, information)
- Talc and Silicone free

### Technical Data

UL-Approval	AWM 20236
Voltage	30V 80°C
Test voltage	500V
Insulation resistance	Min. 2000MΩ x km
Temperature range	Moving -25°C - +80°C Fixed -40°C - +80°C
Minimum bending radius	Moving 12 x cable OD Fixed 6 x cable OD
Burning behavior	Flame retardant per DIN EN 60332-1-2 IEC 60332-1 UL 1581 section VW-1 FT 1
Halogen free	According to DIN EN 60754-1
Approvals	RoHS REACH

### Construction

- Bare copper wire super finely stranded per DIN VDE 0295 class 6 and IEC 60228 class 6
- Special TPE conductor insulation
- G: with GNYE ground conductor  
x: without ground conductor
- Conductors color-coded for specific system
- Layer pitch optimized
- Fleece wrap over cabled conductors
- Tinned copper braid shield, optical coverage ≥ 85 %
- Extremely oil resistant PUR jacket
- Green jacket RAL 6018

Additional feedback cables for other systems available. Please contact us for further information.

\*Siemens and DRIVE-CLiQ are registered trademarks  
Specifications are subject to change without prior notice

Part No.	Description No. of conductors incl. ground	Siemens Designation	OD / Ø ca. mm	OD / Ø inches	Weight Lbs/Mft	Copper Lbs/Mft
----------	--	------------------------	------------------	------------------	-------------------	-------------------

### For Siemens Standard Systems 6FX8000\* and similar

111412	(8×2×0.18) BK/BN, RD/OG, YE/GN, BU/VT, GY/WH, WHBK/WHBN, WHRD/WHOG, WHGN/WHYE	1BD11*	8.2	0.323	88	49
111456	(4×0.5+4×2×0.38) 0.5: WHBU, WHBK, WHRD, WHYE 0.38: BK/BN, RD/OG, GN/YE, BU/VT	1BD21*	9.4	0.370	89	58
111459	(2×(0.5)+3×(2×0.14)) (0.5): BK, RD 0.14: BK/BN, RD/OG, GN/YE	1BD31*	8.7	0.343	86	46
111458	(2×0.5+3×(2×0.14)+4×0.14) 0.5: BNBU, BNRD (0.14) BK/BN, RD/OG, GN/YE 0.14: BU, GY, WHBK, WHYE	1BD41*	8.6	0.339	82	41
111457	(2×0.5+3×(2×0.14)+ 4×0.23+4×0.14) 0.5: BNBU, BNRD 0.23: GNBK, GNRD, BNYE, BNGY (0.14) BK/BN RD/OG, YEGN 0.14: BU, GY, WHBK, WHYE	1BD51*	9.8	0.386	103	6.2
111453	(4×2×0.18) BK/BN, RD/OG, GN/YE, BU/VT	1BD61*	6.6	0.260	51	22
111452	(2×2×0.18) Star quad, BK, RD, OG, BN	1BD71*	5.1	0.201	28	15
111454	(12×0.23) BK, BN, RD, OG, GN, YE, BU, VT, GY, WH, WHBK, WHBN	1BD81*	7.4	0.291	57	32

### For Siemens DRIVE-CLiQ Standard System\* and similar

104310	(2x2x0.15+1x2x0.34) 0.34: RD/BK 0.15: PK/BU, YE/GN	2DC00*	6.8	0.268	49	23
--------	--	--------	-----	-------	----	----

# LUTZE SUPERFLEX® Plus (C) PUR Feedback, Shielded

## High Flexing Feedback Resolver Cable for Various Systems



### Application

- Industrial shielded feedback, resolver cable for tacho sensor, brake sensor, speed sensor etc.
- Full PUR jacket and TPE cable insulation optimally suited for C-tracks, extremely harsh operating conditions, aggressive coolants and lubricants
- Especially for industrial environments, machines and plants

### Characteristics

- High active and passive interference resistance (EMC)
- Special braided shield, optimized for continuous flexing
- Very good alternating bending strength, for continuous flexing
- Low adhesion, abrasion-resistant, nick-resistant, tear-resistant
- Hydrolysis-resistant, microbe-resistant and rot-resistant
- Resistant to weather, ozone and UV resistant
- Salt water resistant
- Excellent coolant and lubricant resistance
- Resistant to most oils, greases, alcohol-free benzenes and kerosene (see tech, information)
- Talc and Silicone free

### Technical Data

UL-Approval	AWM 20233
Voltage	300V 80°C
Test voltage	2000V
Maximum conductor capacitance	ca. 60pF/m
Insulation resistance	Min. 2000MΩ x km
Temperature range	Moving -25°C - +80°C Fixed -40°C - +80°C
Minimum bending radius	Moving 12 x cable OD Fixed 6 x cable OD
Burning behavior	Flame retardant per DIN EN 60332-1-2 IEC 60332-1 UL 1581 section VW-1 FT 1
Halogen free	According to DIN EN 60754-1
Approvals	RoHS REACH

### Construction

- Bare copper wire, super finely stranded per DIN VDE 0295 class 6 and IEC 60228 class 6
- Special TPE conductor insulation
- G: with GNYE ground conductor  
x: without ground conductor
- Conductors color-coded per DIN 47100
- Pairs individually shielded with foil and braid, and jacketed
- Layer pitch optimized
- Fleece wrap over cabled conductors
- Tinned copper braid shield, optical coverage ≥ 85 %
- Full PUR jacket, matte, adhesion-free surface
- Green jacket RAL 6018

Additional feedback cables for other systems available.

Please contact us for further information.

Specifications are subject to change without prior notice **1-800-447-2371**



[www.lutze.com](http://www.lutze.com)

Part No.	Description No. of conductors	OD / Ø ca. mm	OD / Ø inches	Weight Lbs/Mft	Copper Lbs/Mft
----------	----------------------------------	------------------	------------------	-------------------	-------------------

### Individual Pair Shielding

<b>111778</b>	(3x(2x0.25)) DIN 47100 TSP WHBN, GNYE, GYPK	9.6	0.378	91	46
<b>111779</b>	(4x(2x0.25)) DIN 47100 TSP WHBN, GNYE, GYPK, BURD	10.2	0.402	122	64

**TSP = Twisted  
Shielded Pair**




# 6 Wire and Cable Management



# LUTZE TOP-T Fittings NPT

## Plastic NPT



### Characteristics

- Integrated strain relief
- Wide sealing and clamping range
- Easy to install
- Temperature range -20°C - +100°C/  
-4°F - +212°F
- Max temporary temperature up to  
+150°C/+300°F
- Protection class IP68

### Specifications

Connecting thread	NPT
Material	Polyamide 6
Seal	CR Chloroprene Rubber
Color	Black RAL 9005 Gray RAL 7001

### Item Specific Approvals

- UL Recognized (R) or UL Listed (L), as per table

Specifications are subject to change without prior notice

Part No.	Thread	Clamping Range Ø inches	Clamping Range Ø mm	TL mm	D/SW mm	TD mm	H mm	UL R / L
<b>BLACK</b>								
<b>FPNPT38B</b>	NPT 3/8"	0.197-0.394	5-10	15	22	17.14	29	R
<b>FPNPT12B</b>	NPT 1/2"	0.394-0.551	10-14	11	30.9	21.34	31	L
<b>FPNPT34B</b>	NPT 3/4"	0.511-0.709	13-18	15	33	26.67	37	L
<b>FPNPT10B</b>	NPT 1"	0.709-0.984	18-25	18	42	33.4	41	L
<b>GRAY</b>								
<b>FPNPT38G</b>	NPT 3/8"	0.197-0.394	5-10	15	22	17.14	29	R
<b>FPNPT12G</b>	NPT 1/2"	0.394-0.551	10-14	11	30.9	21.34	31	L
<b>FPNPT34G</b>	NPT 3/4"	0.511-0.709	13-18	15	33	26.67	37	L
<b>FPNPT10G</b>	NPT 1"	0.709-0.984	18-25	18	42	33.4	41	L
<b>REDUCED CLAMPING RANGE</b>								
<b>FPNPT38B-R</b>	NPT 3/8"	0.118-0.276	3-7	15	22	17.14	29	
<b>FPNPT12B-R</b>	NPT 1/2"	0.276-0.472	7-12	11	30.9	21.34	31	
<b>FPNPT34B-R</b>	NPT 3/4"	0.354-0.630	9-16	15	33	26.67	37	
<b>FPNPT10B-R</b>	NPT 1"	0.472-0.787	12-20	18	42	33.4	41	

# LUTZE TOP-T Fittings PG



## Characteristics

- Integrated strain relief
- Wide sealing and clamping range
- Easy to install
- Temperature range  
-20°C - +100°C/  
-4°F - +212°F
- Max temporary temperature  
up to  
+150°C/+300°F
- Protection class  
IP68

## Specifications

Connecting thread PG as per  
DIN 40430

Material Polyamide 6

Seal CR Chloroprene  
Rubber

Color Black RAL  
9005  
Gray RAL  
7001


## Item Specific Approvals

- UL Recognized (R) or UL Listed (L), as per table

Part No.	Thread	Clamping Range Ø inches	Clamping Range Ø mm	TL mm	D/SW mm	TD mm	H mm	UL R / L
<b>BLACK</b>								
FPPG7B	PG 7	0.118-0.256	3-6.5	8	15	12.5	22	R
FPPG9B	PG 9	0.157-0.315	4-8	8	19	15.2	26.5	R
FPPG11B	PG 11	0.197-0.394	5-10	8	22	18.6	29	R
FPPG13B	PG 13.5	0.236-0.472	6-12	10	24	20.4	29	L
FPPG16B	PG 16	0.394-0.551	10-14	10	27	22.5	31	L
FPPG21B	PG 21	0.512-0.709	13-18	11	33	28.3	37	L
FPPG29B	PG 29	0.709-0.984	18-25	11	42	37	41	L
FPPG36B	PG 36	0.866-1.260	22-32	13	53	47	51.5	L
FPPG42B	PG 42	1.181-1.496	30-38	13	60	54	53.5	L
FPPG48B	PG 48	1.339-1.732	34-44	14	65	59.3	53.5	L
<b>GRAY</b>								
FPPG7G	PG 7	0.118-0.256	3-6.5	8	15	12.5	22	R
FPPG9G	PG 9	0.157-0.315	4-8	8	19	15.2	26.5	R
FPPG11G	PG 11	0.197-0.394	5-10	8	22	18.6	29	R
FPPG13G	PG 13.5	0.236-0.472	6-12	10	24	20.4	29	L
FPPG16G	PG 16	0.394-0.551	10-14	10	27	22.5	31	L
FPPG21G	PG 21	0.512-0.709	13-18	11	33	28.3	37	L
FPPG29G	PG 29	0.709-0.984	18-25	11	42	37	41	L
FPPG36G	PG 36	0.866-1.260	22-32	13	53	47	51.5	L
FPPG42G	PG 42	1.181-1.496	30-38	13	60	54	53.5	L
FPPG48G	PG 48	1.339-1.732	34-44	14	65	59.3	53.5	L
<b>REDUCED CLAMPING RANGE</b>								
FPPG7G-R	PG 7	0.079-0.197	2-5	8	15	12.5	22	
FPPG9G-R	PG 9	0.079-0.236	2-6	8	19	15.2	26.5	
FPPG11G-R	PG 11	0.118-0.276	3-7	8	22	18.5	29	
FPPG13G-R	PG 13.5	0.197-0.354	5-9	10	24	20.4	29	
FPPG16G-R	PG 16	0.276-0.472	7-12	10	27	22.5	31	
FPPG21G-R	PG 21	0.354-0.630	9-16	11	33	28.3	37	
FPPG29G-R	PG 29	0.472-0.787	12-20	11	42	37	41	
FPPG36G-R	PG 36	0.787-1.024	20-26	13	53	47	51.5	

Specifications are subject to change without prior notice

# LUTZE TOP-T Fittings Metric



## Characteristics

- Integrated strain relief
- Wide sealing and clamping range
- Easy to install
- Manufactured according to EN 50262 requirements
- Temperature range  
-20°C - +100°C/  
-4°F - +212°F
- Max temporary temperature  
up to +150°C/  
+300°F
- Protection class  
IP68

## Specifications

Connecting thread	Metric as per EN 60423
Material	Polyamide 6
Seal	CR Chloroprene Rubber
Color	Black RAL 9005 Gray RAL 7001

## Item Specific Approvals

- UL Recognized (R) or UL Listed (L), as per table

Part No.	Thread	Clamping Range Ø inches	Clamping Range Ø mm	TL mm	D/SW mm	TD mm	H mm	UL R / L
----------	--------	-------------------------	---------------------	-------	---------	-------	------	----------

### BLACK

FPM12B	M12x1.5	0.118-0.256	3-6.5	8	15.0	12	22.5	R
FPM16B	M16x1.5	0.197-0.394	5-10	10	22.0	16	30	R
FPM20B	M20x1.5	0.315-0.551	10-14	10	27.0	20	31	L
FPM25B	M25x1.5	0.512-0.709	13-18	10	33.0	25	37	L
FPM32B	M32x1.5	0.709-0.984	18-25	15	42.0	32	41	L
FPM40B	M40x1.5	0.866-1.260	22-32	18	53.0	40	51.5	L
FPM50B	M50x1.5	1.181-1.496	30-38	18	60.0	50	53	L
FPM63B	M63x1.5	1.339-1.732	34-44	18	65.0	63	53	L

### GRAY

FPM12G	M12x1.5	0.118-0.256	3.0-6.5	8	15.0	12	22.5	R
FPM16G	M16x1.5	0.197-0.394	5-10	10	22.0	16	30	R
FPM20G	M20x1.5	0.315-0.551	10-14	10	27.0	20	31	L
FPM25G	M25x1.5	0.512-0.709	13-18	10	33.0	25	37	L
FPM32G	M32x1.5	0.709-0.984	18-25	15	42.0	32	41	L
FPM40G	M40x1.5	0.866-1.260	22-32	18	53.0	40	51.5	L
FPM50G	M50x1.5	1.181-1.496	30-38	18	60.0	50	53	L
FPM63G	M63x1.5	1.339-1.732	34-44	18	65.0	63	53	L

### REDUCED CLAMPING RANGE


FPM12G-R	M12x1.5	0.079-0.197	2-5	8	15.0	12	22.5	
FPM16G-R	M16x1.5	0.118-0.276	3-7	10	22.0	16	30	
FPM20G-R	M20x1.5	0.276-0.472	7-12	10	27.0	20	31	
FPM25G-R	M25x1.5	0.354-0.630	9-16	10	33.0	25	37	
FPM32G-R	M32x1.5	0.472-0.787	12-20	15	42.0	32	41	
FPM40G-R	M40x1.5	0.787-1.024	20-26	18	53.0	40	51.5	
FPM50G-R	M50x1.5	0.984-1.220	25-31	18	60.0	50	53	
FPM63G-R	M63x1.5	1.142-1.378	29-35	18	65.0	63	53	

Specifications are subject to change without prior notice



# LUTZE TOP-T Locknuts Plastic

## Plastic NPT, PG and Metric



### Characteristics

- Hexagonal locknut for secure tightening of plastic cable fittings and accessories
- Easy to install
- Temperature range -20°C - +100°C/  
-4°F - +212°F
- Max temporary temperature up to +150°C/+300°F

### Specifications

Material Polyamide 6, 30% glass fiber reinforced  
Color Black RAL 9005  
Gray RAL 7001


Flange is imprinted with locknut size for easy identification.

Part No.	Thread	OD - Ø mm	SW mm	H mm
<b>NPT BLACK</b>				
LPNPT38B	NPT 3/8"	25	22	6
LPNPT12B	NPT 1/2"	30.5	27	6
LPNPT34B	NPT 3/4"	37.5	33	6
LPNPT10B	NPT 1"	46.5	41	7
<b>NPT GRAY</b>				
LPNPT38G	NPT 3/8"	25	22	6
LPNPT12G	NPT 1/2"	30.5	27	6
LPNPT34G	NPT 3/4"	37.5	33	6
LPNPT10G	NPT 1"	46.5	41	7
<b>PG BLACK</b>				
LPPG7B	PG 7	21	19	5
LPPG9B	PG 9	24	22	5
LPPG11B	PG 11	26	24	5
LPPG13B	PG 13.5	29	27	6
LPPG16B	PG 16	33	30	6
LPPG21B	PG 21	39	36	7
LPPG29B	PG 29	50	46	7
LPPG36B	PG 36	66	60	8
LPPG42B	PG 42	73	65	8
LPPG48B	PG 48	78	70	8
<b>PG GRAY</b>				
LPPG7G	PG 7	21	19	5
LPPG9G	PG 9	24	22	5
LPPG11G	PG 11	26	24	5
LPPG13G	PG 13.5	29	27	6
LPPG16G	PG 16	33	30	6
LPPG21G	PG 21	39	36	7
LPPG29G	PG 29	50	46	7
LPPG36G	PG 36	66	60	8
LPPG42G	PG 42	73	65	8
LPPG48G	PG 48	78	70	8
<b>METRIC BLACK</b>				
LPM12B	M12x1.5	19.5	18	5
LPM16B	M16x1.5	24.2	22	5
LPM20B	M20x1.5	28.6	26	6
LPM25B	M25x1.5	35.0	32	6
LPM32B	M32x1.5	46.1	41	7
LPM40B	M40x1.5	55.3	50	7
LPM50B	M50x1.5	66.1	60	8
LPM63B	M63x1.5	82.5	75	8
<b>METRIC GRAY</b>				
LPM12G	M12x1.5	19.5	18	5
LPM16G	M16x1.5	24.2	22	5
LPM20G	M20x1.5	28.6	26	6
LPM25G	M25x1.5	35.0	32	6
LPM32G	M32x1.5	46.1	41	7
LPM40G	M40x1.5	55.3	50	7
LPM50G	M50x1.5	66.1	60	8
LPM63G	M63x1.5	82.5	75	8

Specifications are subject to change without prior notice

# LUTZE TOP-T Fittings Reducer

## Plastic Metric Reducer



Part No.	Thread G	Thread G1	SW mm	L mm	L1 mm
METRIC REDUCER					
<b>600550</b>	M20x1.5	M12x1.5	24	12	8
<b>600551</b>	M20x1.5	M16x1.5	24	12	8
<b>600553</b>	M25x1.5	M16x1.5	32	14	8
<b>600554</b>	M25x1.5	M20x1.5	32	14	8
<b>600557</b>	M32x1.5	M20x1.5	36	16	10
<b>600558</b>	M32x1.5	M25x1.5	36	16	10
<b>600561</b>	M40x1.5	M25x1.5	46	16	10
<b>600562</b>	M40x1.5	M32x1.5	46	16	10
<b>600565</b>	M50x1.5	M32x1.5	55	18	12
<b>600566</b>	M50x1.5	M40x1.5	55	18	12

### Metric Reducer Characteristics

- Reduction of threaded or clearance holes to smaller thread size
- Temperature range      -30°C - +100°C /  
   -22°F - +212°F
- Material                      Polyamide PA6 GF30
- Internal/External thread    Metric as per EN 60423
- Color                          Gray RAL 7035

Specifications are subject to change without prior notice

# LUTZE TOP-T Fittings NPT

## Metal NPT



### Characteristics

- Integrated strain relief
- Anti-twist design
- Wide sealing and clamping range
- Easy to install
- Temperature range -20°C - +100°C / -4°F - +212°F
- Protection class IP68

Part No.	Thread	Clamping Range Ø inches	Clamping Range Ø mm	TL mm	SW1 mm	SW2 mm	H mm	UL R / L
----------	--------	-------------------------	---------------------	-------	--------	--------	------	----------

### NPT

<b>FMNPT38</b>	NPT 3/8"	0.157-0.315	4-8	11.5	17	19	23	R
<b>FMNPT12</b>	NPT 1/2"	0.236-0.472	6-12	13	22	22	25.5	L
<b>FMNPT34</b>	NPT 3/4"	0.512-0.709	13-18	13	30	30	35.5	L
<b>FMNPT10</b>	NPT 1"	0.709-0.984	18-25	13	40	43	43	L

### Specifications

Design allows for shield termination	
Connecting thread	NPT
Material	Brass, nickel plated
Clamping insert	Polyamide 6
Seal	CR Chloroprene Rubber
O-ring	NBR


### Item Specific Approvals

- UL Recognized (R) or UL Listed (L), as per table
- Type 4X for UL Recognized and UL Listed items

Specifications are subject to change without prior notice

# LUTZE TOP-T Fittings PG

## Metal PG



### Characteristics

- Integrated strain relief
- Anti-twist design
- Wide sealing and clamping range
- Easy to install
- Temperature range  
-20°C - +100°C  
-4°F - +212°F
- Protection class  
IP68

### Fitting Specifications

Connecting thread	PG as per DIN 40430
Material	Brass, nickel plated
Clamping insert	Polyamide 6
Seal	CR Chloroprene
O-ring	Rubber NBR

### Item Specific Approvals

- UL Recognized (R) or UL Listed (L), as per table
- Type 4X for UL Recognized and UL Listed items


Part No.	Thread	Clamping Range Ø inches	Clamping Range Ø mm	TL mm	SW1 mm	SW2 mm	H mm	UL R / L
<b>PG</b>								
<b>FMPG7</b>	PG 7	0.118-0.256	3-6.5	6	14	14	22	R
<b>FMPG9</b>	PG 9	0.157-0.315	4-8	6	17	17	23.5	
<b>FMPG11</b>	PG 11	0.197-0.394	5-10	6	20	20	26	
<b>FMPG13</b>	PG 13.5	0.236-0.472	6-12	6.5	22	22	24.5	R
<b>FMPG16</b>	PG 16	0.394-0.551	10-14	6.5	24	24	28	
<b>FMPG21</b>	PG 21	0.512-0.709	13-18	7.2	30	30	32.5	L
<b>FMPG29</b>	PG 29	0.709-0.984	18-25	8	40	40	38.5	L
<b>FMPG36</b>	PG 36	0.866-1.260	22-32	9	50	50	48	L
<b>FMPG42</b>	PG 42	1.181-1.496	30-38	12	58	58	48.5	L
<b>FMPG48</b>	PG 48	1.339-1.732	34-44	14	64	64	53	L
<b>LONG THREAD</b>								
<b>FMPG7-L</b>	PG 7	0.118-0.256	3-6.5	10	14	14	22	R
<b>FMPG9-L</b>	PG 9	0.157-0.315	4-8	10	17	17	23.5	
<b>FMPG11-L</b>	PG 11	0.197-0.394	5-10	10	20	20	26	
<b>FMPG13-L</b>	PG 13.5	0.236-0.472	6-12	10	22	22	24.5	R
<b>FMPG16-L</b>	PG 16	0.394-0.551	10-14	10	24	24	28	L
<b>FMPG21-L</b>	PG 21	0.512-0.709	13-18	12	30	30	32.5	L
<b>FMPG29-L</b>	PG 29	0.709-0.984	18-25	12	40	40	38.5	L

Specifications are subject to change without prior notice



# LUTZE TOP-T Fittings Metric

## Metal Metric



### Characteristics

- Integrated strain relief
- Anti-twist design
- Wide sealing and clamping range
- Easy to install
- Temperature range -20°C - +100°C / -4°F - +212°F
- Protection class IP68

### Fitting Specifications

Connecting thread	Metric as per EN 60423
Material	Brass, nickel plated
Clamping insert	Polyamide 6
Seal	CR Chloroprene Rubber
O-ring	NBR

### Item Specific Approvals


- UL Recognized (R) or UL Listed (L) as per table
- Type 4X for UL Recognized and UL Listed items

Specifications are subject to change without prior notice

Part No.	Thread	Clamping Range Ø inches	Clamping Range Ø mm	TL mm	SW1 mm	SW2 mm	H mm	UL R / L
<b>METRIC</b>								
<b>FMM12</b>	M12x1.5	0.118-0.256	3-6.5	6	14	14	22	R
<b>FMM16</b>	M16x1.5	0.157-0.315	4-8	7	17	18	23	R
<b>FMM20</b>	M20x1.5	0.236-0.472	6-12	8	22	22	26.5	L
<b>FMM25</b>	M25x1.5	0.394-0.551	10-14	8	24	27	27.7	L
<b>FMM32</b>	M32x1.5	0.512-0.709	13-18	9	30	34	33	L
<b>FMM40</b>	M40x1.5	0.709-0.984	18-25	9	40	43	38	L
<b>FMM50</b>	M50x1.5	0.866-1.260	22-32	9	50	55	48	L
<b>FMM63</b>	M63x1.5	1.339-1.732	34-44	14	64	68	53	L
<b>LONG THREAD</b>								
<b>FMM12-L</b>	M12x1.5	0.118-0.256	3-6.5	12	14	14	22	
<b>FMM16-L</b>	M16x1.5	0.157-0.315	4-8	12	17	18	23	
<b>FMM20-L</b>	M20x1.5	0.236-0.472	6-12	12	22	22	26.5	
<b>FMM25-L</b>	M25x1.5	0.394-0.551	10-14	12	24	27	27.7	
<b>FMM32-L</b>	M32x1.5	0.512-0.709	13-18	15	30	34	33	
<b>FMM40-L</b>	M40x1.5	0.709-0.984	18-25	15	40	43	38	
<b>FMM50-L</b>	M50x1.5	0.866-1.260	22-32	15	50	55	48	
<b>FMM63-L</b>	M63x1.5	1.339-1.732	34-44	18	64	68	53	

# LUTZE TOP-T Fittings EMC2 Metric and NPT

## Metal EMC2 (Electro Magnetic Compatibility), Quick Installation



### Characteristics

- Adapts to different size cable shields
- 360° shield termination
- Integrated strain relief
- Wide sealing and clamping range
- Fast and easy to install
- Temperature range -20°C - +100°C / -4°F - +212°F
- Protection class IP68

### Fitting Specifications





Connecting thread	Metric as per EN 60423
	NPT per ANSI ASME B1.21.1
Material	Brass, nickel plated
Clamping insert	Polyamide 6
Seal	CR Chloroprene Rubber
O-ring	NBR

Part No.	Thread	Clamping Range Ø inches	Clamping Range Ø mm	TL mm	SW1 mm	SW2 mm	H mm	UL R/L
<b>METRIC</b>								
<b>FMM12-C2</b>	M12x1.5	0.118-0.256	3-6.5	6	14	14	22.0	R/L
<b>FMM16-C2</b>	M16x1.5	0.197-0.394	5-10	7	20	20	29.0	R/L
<b>FMM20-C2</b>	M20x1.5	0.236-0.472	6-12	8	22	22	27.5	R/L
<b>FMM25-C2</b>	M25x1.5	0.433-0.669	11-17	8	27	27	30.7	R/L
<b>FMM32-C2</b>	M32x1.5	0.590-0.827	15-21	8	34	34	38.0	L
<b>FMM40-C2</b>	M40x1.5	0.748-1.102	19-28	9	43	43	43.0	L
<b>FMM50-C2</b>	M50x1.5	1.063-1.496	27-38	9	58	58	54.5	L
<b>FMM63-C2</b>	M63x1.5	1.339-1.732	34-44	14	64	68	57.0	L
<b>NPT</b>								
<b>FMNPT38-C2</b>	NPT 3/8"	0.197-0.394	5-10	11.5	20	20	29.5	R
<b>FMNPT12-C2</b>	NPT 1/2"	0.236-0.472	6-12	13	22	22	25.5	L
<b>FMNPT34-C2</b>	NPT 3/4"	0.512-0.709	13-18	13	30	30	35.5	L
<b>FMNPT10-C2</b>	NPT 1"	0.709-0.984	18-25	13	40	43	43	L

### Approvals

- UL Recognized (R) or UL Listed (L), as per table
- Type 4X UL Recognized and UL Listed items
- UL Listed acc. to UL514


Long thread EMC2 fittings available through special order. Please contact us.



Specifications are subject to change without prior notice

# LUTZE TOP-T Fittings EMC Metric and NPT

## Large Diameter Metal EMC (Electro Magnetic Compatibility), Quick Installation



### Characteristics

- Designed for large diameter cables
- Two seal inserts for clamping range adjustment
- Adapts to different size cable shields
- 360° shield termination
- Integrated strain relief
- Wide sealing and clamping range
- Fast and easy to install
- Temperature range -40°C - +80°C / -40°F - +176°F
- Protection class IP68

### Fitting Specifications

Connecting thread	Metric per EN 60423 NPT per ANSI ASME B1.21.1
Material	Brass, nickel plated
Clamping insert	Polyamide 6
Seal	CR Chloroprene Rubber
O-ring	NBR

### Approvals

- UL Listed as per UL2225

Specifications are subject to change without prior notice

Part No.	Thread	Clamping Range Ø inches	Clamping Range Ø mm	TL mm	SW1 mm	SW2 mm	H mm	UL R/L
<b>METRIC</b>								
<b>FMM63-CEX</b>	M63x1.5	1.378-1.771	35-45	20	68	64	43.5	L
<b>FMM75-CEX</b>	M75x1.5	1.812-2.440	46-62	20	80	80	51.0	L
<b>FMM90-CEX</b>	M90x1.5	2.363-2.952	60-75	20	95	95	55.0	L
<b>NPT</b>								
<b>FMNPT2-CEX</b>	NPT 2"	1.378-1.771	35-45	20	68	64	43.5	L
<b>FMNPT212-CEX</b>	NPT 2-1/2"	1.812-2.440	46-62	21	80	80	55.0	L
<b>FMNPT3-CEX</b>	NPT 3"	2.363-2.952	60-75	21	95	95	63.0	L

"These fittings are designed to provide strain relief and shield termination for large diameter VFD cables. They offer a wide sealing range with three removeable sealing rings".



# LUTZE TOP-T Locknuts Metal

## Metal PG, Metric and EMC Metric



### Characteristics

- Hexagonal locknut for secure tightening of cable fittings and accessories
- Temperature range up to +200°C/+392°F

### Locknut Specifications

Material Brass, nickel plated

Part No.	Thread	OD - Ø mm	SW mm	H mm
<b>PG</b>				
LMPG7	PG 7	16.6	15	2.8
LMPG9	PG 9	20	18	2.8
LMPG11	PG 11	23.5	21	3
LMPG13	PG 13.5	25.5	23	3
LMPG16	PG 16	29	26	3
LMPG21	PG 21	35.5	32	3.5
LMPG29	PG 29	45	41	4.0
LMPG36	PG 36	56	51	5.0
LMPG42	PG 42	66.0	60	5.0
LMPG48	PG 48	70.5	64	5.5

Due to tapered NPT thread, we recommend using plastic locknuts with metal NPT fittings if locknut is required.

<b>METRIC</b>				
LMM12	M12x1.5	16.6	15	2.8
LMM16	M16x1.5	21	19	3.0
LMM20	M20x1.5	26.5	24	3.5
LMM25	M25x1.5	33	30	4.0
LMM32	M32x1.5	39.5	36	5.0
LMM40	M40x1.5	51	46	5.0
LMM50	M50x1.5	66	60	5.0
LMM63	M63x1.5	77	70	6.0

### EMC Cutting Teeth Metric

- For secure tightening of EMC cable fittings
- To cut through paint layers or powder coatings ensuring optimal contact
- Increased vibration resistance


<b>EMC - CUTTING TEETH METRIC</b>				
600460	M12x1.5	16.5	15	4.5
600461	M16x1.5	20.9	19	4.5
600462	M20x1.5	26.4	24	5.5
600463	M25x1.5	33	30	5.5
600464	M32x1.5	39.7	36	5.5
600465	M40x1.5	50.6	46	6.0
600466	M50x1.5	66	60	6.0

Specifications are subject to change without prior notice



# LUTZE TOP-T Fittings Reducer

## Metal PG and Metric Reducer



### PG Reducer Characteristics

- Reduction of threaded or clearance holes to smaller thread size
- Temperature range -30°C - +100°C / -22°F - +212°F
- Reduction Brass, nickel plated
- Internal/External thread PG as per DIN 40430

### Metric Reducer Characteristics


- Reduction of threaded or clearance holes to smaller thread size
- Temperature range -30°C - +100°C / -22°F - +212°F
- Reduction Brass, nickel plated
- Internal/External thread Metric as per EN 60423

Part No.	Thread G	Thread G1	SW mm	L mm	L1 mm
<b>PG</b>					
<b>600400</b>	PG 9	PG 7	17	8.5	6
<b>600411</b>	PG 11	PG 7	20	8.5	6
<b>600401</b>	PG 11	PG 9	20	8.5	6
<b>600408</b>	PG 13.5	PG 9	22	9	6.5
<b>600402</b>	PG 13.5	PG 11	22	9	6.5
<b>600409</b>	PG 16	PG 9	24	9.5	6.5
<b>600410</b>	PG 16	PG 11	24	9.5	6.5
<b>600403</b>	PG 16	PG 13.5	24	9.5	6.5
<b>600413</b>	PG 21	PG 11	30	10	7
<b>600414</b>	PG 21	PG 13.5	30	10	7
<b>600404</b>	PG 21	PG 16	30	10	7
<b>600407</b>	PG 29	PG 16	39	11.5	8
<b>600405</b>	PG 29	PG 21	39	11.5	8
<b>600412</b>	PG 36	PG 21	50	12.5	9
<b>600406</b>	PG 36	PG 29	50	12.5	9
<b>600416</b>	PG 42	PG 36	57	14	10
<b>METRIC</b>					
<b>600220</b>	M16x1.5	M12x1.5	18	8.5	6.0
<b>600221</b>	M20x1.5	M12x1.5	24	9	6.5
<b>600222</b>	M20x1.5	M16x1.5	24	9	6.5
<b>600223</b>	M25x1.5	M16x1.5	28	10	7
<b>600224</b>	M25x1.5	M20x1.5	28	10	7
<b>600225</b>	M32x1.5	M20x1.5	34	11.5	8
<b>600226</b>	M32x1.5	M25x1.5	34	11.5	8
<b>600227</b>	M40x1.5	M25x1.5	45	11.5	8
<b>600228</b>	M40x1.5	M32x1.5	45	11.5	8
<b>600229</b>	M50x1.5	M32x1.5	55	14	10
<b>600230</b>	M50x1.5	M40x1.5	55	14	10

Specifications are subject to change without prior notice

# LUTZE TOP-T Fittings Adapter

## Metric to NPT Adapters



### Adapter METRIC to NPT Characteristics

- Adapter from metric to NPT thread
- Temperature range up to +200°C/+392°F
- Adapter Brass CuZn39Pb3, nickel-plated
- External thread Metric as per EN 60423
- Internal thread NPT

Part No.	Thread A	Thread B	L mm	H mm	Da mm	Di mm
<b>METRIC TO NPT</b>						
<b>AMM16-12</b>	M16x1.5	NPT 1/2"	6.5	25	24	11
<b>AMM20-12</b>	M20x1.5	NPT 1/2"	6.5	25	24	15
<b>AMM25-34</b>	M25x1.5	NPT 3/4"	7	28	30	18
<b>AMM32-34</b>	M32x1.5	NPT 3/4"	8	26	37	23
<b>AMM32-10</b>	M32x1.5	NPT 1"	8	33	38	27

Specifications are subject to change without prior notice

# LUTZE TOP-T Fittings Accessories

## Multihole Insert TPE PG, Metric, NPT



### Characteristics

- Multiple hole insert for two or more cables in one fitting
- Replaces the existing rubber insert to offer multiple hole installation
- Suitable for plastic and metal fittings
- Solid inserts can be drilled to suit any application
- Minimum quantity 100 pcs/package

### Insert Specifications


Material TPE

Part No.	Fits Size PG	Fits Size Metric	Fits Size NPT	Outer - Ø mm	Number of Cables x OD - Ø mm
600626	PG 9	M16 (metal only)		10	2 x 3.0
600627	PG 9	M16 (metal only)		10	4 x 3.0
600541	PG 9	M16 (metal only)		10	0 x 0.0
600628	PG 11	M16 (plastic only)	3/8"	13	2 x 4.0
600629	PG 11	M16 (plastic only)	3/8"	13	2 x 4.5
600635	PG 11	M16 (plastic only)	3/8"	13	3 x 4.0
600636	PG 11	M16 (plastic only)	3/8"	13	3 x 5.0
600542	PG 11	M16 (plastic only)	3/8"	13	0 x 0.0
600638	PG 13.5	M20		15	2 x 4.5
600639	PG 13.5	M20		15	2 x 5.0
600640	PG 13.5	M20		15	2 x 6.0
600637	PG 13.5	M20		15	3 x 4.0
600630	PG 13.5	M20		15	3 x 5.0
600543	PG 13.5	M20		15	0 x 0.0
600641	PG 16		1/2"	17	2 x 4.0
600644	PG 16		1/2"	17	2 x 6.0
600631	PG 16		1/2"	17	3 x 4.0
600643	PG 16		1/2"	17	3 x 5.0
600646	PG 16		1/2"	17	4 x 6.0
600633	PG 16		1/2"	17	5 x 4.0
600544	PG 16		1/2"	17	0 x 0.0
600645	PG 16		1/2"	17	3 x 6.0
600647	PG 16		1/2"	17	3 x 6.5
600642	PG 16		1/2"	17	4 x 4.0
600632	PG 16		1/2"	17	4 x 5.0
600648	PG 21	M25	3/4"	22	2 x 7.0
600651	PG 21	M25	3/4"	22	2 x 8.0
600653	PG 21	M25	3/4"	22	2 x 9.0
600649	PG 21	M25	3/4"	22	3 x 7.0
600652	PG 21	M25	3/4"	22	3 x 8.0
600634	PG 21	M25	3/4"	22	4 x 7.0
600545	PG 21	M25	3/4"	22	0 x 0.0
600656	PG 29	M32	1"	29.5	5 x 8.5
600654	PG 29	M32	1"	29.5	6 x 5.0
600655	PG 29	M32	1"	29.5	8 x 5.0
600546	PG 29	M32	1"	29.5	0 x 0.0

Specifications are subject to change without prior notice

# LUTZE EMC Cabinet Accessories

## EMC rails with shield termination and strain relief options within the control cabinet



Part No.	EMC Rail Type	Dimensions WxHxL mm	No. of shield points	Weight grams
346813	EMVS 04-55813	15x32x1,155	55	466
346812	EMVS 03-46812	21.5x75x1,173	46	1,169

### EMC Rail Characteristics

- Material
  - Storage Temperature
  - Operational Temperature
- Formed sheet metal  
-30°C - +90°C,  
-22°F - +194°F  
-5°C - +80°C,  
+23°F - +176°F

### Mounting Bracket Characteristics

- 346814
  - 346860
- Standard M5 thread  
Standard M8 thread

Part No.	Mounting bracket Type	Dimensions WxHxL mm	Suitable for Rail	Weight grams
346814.0010	HW-EMVS 04	29.8x14x24	346813	8
346860.0002	HW-EMVS 03	18x80x65	346812	98

### Shield Clamp Characteristics

- Material
  - Temperature range
- Sheet steel  
0°C - +60°C,  
+32°F - +140°F

Part No.	Shield Clamp Type	Cable Clamping Range Ø mm	Length mm	Weight grams
330089.0100	EMVSK 12	0-12	36	2.5
330071.0010	EMVFSK1	12 - 20	42	3
330072.0010	EMVFSK2	20 - 30	55	5
330073.0010	EMVFSK3	30 - 50	74	7

### Strain Relief Characteristics

- Fits rails
  - Material
  - Hexagon screw
  - Bottom clip use is optional
- 346812, 346813  
Galvanized Steel  
Slotted

Part No.	Strain Relief Type	Cable Clamping Range Ø mm	Thread	Weight grams
331000.0010	KS0	8 - 12	M6	30
331001.0010	KS1	12 - 16	M6	32
331002.0010	KS2	16 - 22	M6	35
331003.0010	KS3	34 - 40	M6	68
331004.0010	KS4	52 - 58	M8	60

### Metal Tie Wrap Characteristics

Stainless Steel

Part No.	Metal Tie Wrap Type	Length mm	Material	Weight grams
330060.0010	KSE	250	Stainless Steel	30


Specifications are subject to change without prior notice

# LUTZE EMC Cabinet Accessories

## Assembly of EMC rails with shield termination and strain relief options



346813





346814.0010



346812



346860.0002

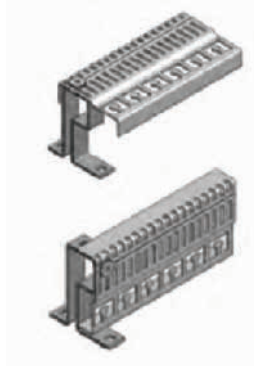

### System advantages at a glance:

- Provides shield termination and strain relief within the control cabinet
- Easy to install
- Zip ties can be used with both rails if desired

### 1. Choose EMC rail based on application requirements.

Lutze EMC rails can be used in any control cabinet either with traditional set up or together with Lutze LSC-Wiring system.

Determine application requirements:

- EMC shielding required only, choose narrower rail 346813
- For both EMC shielding and strain relief needs, choose wider rail 346812
- Cut rail to desired length to fit your cabinet

### 2. Choose appropriate brackets to install the rail inside the cabinet.

- Use mounting brackets 346814 to secure rail 346813. Uses standard M5 bolts.
- Use mounting brackets 346860 to secure rail 346812. Rail can be mounted into the cabinet in two different ways: see pictures to the left. Mounting holes, 8.5 mm, to be made by the user.



330089.0100



330071.0010 –  
330073.0010



331000.0010 –  
331004.0010

### 3. Choose appropriate shield clamps.

- Determine the desired shielding clamp

### 4. Select optional strain relief if required in the application.

- Rail 346813 provides shield termination or strain relief
- Rail 346812 provides combined shield termination and strain relief

Specifications are subject to change without prior notice



# LUTZE Cablefix Vario

## Modular Strain Relief System with Plastic or Aluminum Frame for Cable Assemblies



Part No.	Frame Type	Dimensions WxHxD mm	No. of Small VK Inserts	No. of Large VG Inserts
<b>PLASTIC</b>				
606052	KKLR1	136 x 71 x 30	4	2
606053	KKLR2	164 x 71 x 30	6	3
<b>ALUMINUM</b>				
606001	AKLR1	108 x 68 x 30	4	2
606002	AKLR2	148 x 68 x 30	6	3
606004	AKLR4	148 x 108 x 30	12	6
606005	AKLR5	188 x 78 x 30	8	4
606007	AKLR7	188 x 118 x 30	16	8

### Characteristics

- Frame material
- Protection class

Polished Aluminum or  
Polyamide 66 (GF30)  
IP65

### Small (VK) Insert Characteristics

- Material
- Temperature range
- Resistance

TPE  
-40°C - +135°C,  
-40°F - +275°F  
UV, ozone, oils and fuels,  
acids and dyes, solvents  
and salt water

Part No.	Type Small VK	Clamping Range Ø mm	No of Holes
606150	VK0	SOLID	0
606151	VK4	4 – 4.5	14
606152	VK5	4.5 – 5.5	8
606153	VK6	5.5 – 6.5	8
606154	VK7	6.5 – 7.5	5
606155	VK8	7.5 – 8.5	5
606156	VK9	8.5 – 9.5	3
606157	VK10	9.5 – 10.5	3
606158	VK12	10.5 – 12.5	2
606159	VK14	12.5 – 14.5	2
606160	VK16	14.5 – 16.5	2

### Large (VG) Insert Characteristics

- Material
- Temperature range
- Resistance

TPE  
-40°C - +135°C,  
-40°F - +275°F  
UV, ozone, oils and fuels,  
acids and dyes, solvents  
and salt water

Part No.	Type Large VG	Clamping Range Ø mm	No of Holes
606200	VG0	SOLID	0
606201	VG18	16.5 – 18.5	2
606202	VG20	18.5 – 20.5	1
606203	VG22	20.5 – 22.5	1
606204	VG24	22.5 – 24.5	1
606205	VG26	24.5 – 26.5	1
606206	VG28	26.5 – 28.5	1
606207	VG30	28.5 – 30.5	1
606208	VG32	30.5 – 32.5	1
606209	VG34	32.5 – 34.5	1

### Blanking Plug Characteristics

- Material

PA6 (GF15)  
Gray

Part No.	Fits Insert Part No.	Type	OD - Ø mm	Length mm
606250	606151	BL4	4	30
606251	606152	BL5	5	30
606252	606153	BL6	6	30
606253	606154	BL7	7	30
606254	606155	BL8	8	30
606255	606156	BL9	9	30
606256	606157	BL10	10	30
606257	606158	BL12	12	30
606258	606159	BL14	14	30
606259	606160	BL16	16	30
606260	606201	BL18	18	30

Specifications are subject to change without prior notice

# LUTZE Cablefix Vario

## Assembly of Modular Strain Relief System



### 1. Choose aluminum or plastic frame.

The Cablefix Vario features outstanding material characteristics for harsh industrial environments and a high sealing protection of IP65. Every frame ships with an included drill pattern for proper mounting to the cabinet.

The plastic frames are made of reinforced polyamide 66 with brass support. The aluminum version is made entirely of solid polished aluminum.

Cablefix Vario offers strain relief options for cable ranges from 4.5 to 34.5mm in diameter. The versatile system is ideal for installations and retrofitting, and offers proper strain relief for already connectorized cables. This is a great advantage over conventional solutions with standard cable fittings.



### 2. Choose appropriate inserts for the selected frame.

Example:

606052 can hold either

- 4 inserts type VK or
- 2 inserts type VG
- 2 VK inserts replace 1 VG insert

VK small	VK small	VG large	VG large	VG large	VK small
VK small	VK small				VK small

- The tongue and groove design makes combining different inserts quick and easy.
- The slotted design allows easy installation by sliding the assembled cables in from the side.

### 3. Select appropriately sized blanking plugs for unused holes.

Once all unused holes are plugged, the system provides a protection rating IP65. The rubber components do not require the use of grease, which is advantageous over other similar systems.

The advantages at a glance:

- Minimum space requirement
- Simple insertion of rubber inserts due to tongue and groove design
- Very versatile
- Allows future expansion
- Ideal for retrofitting of existing cabinets



# LUTZE Fittings Cablefix

## Cablefix



### Characteristics




- Integrated strain relief in one direction
- Easy to install: cable pushes easily into position, locks itself and it can no longer be pulled out unless the clamp is released
- An integrated seal protects up to IP55
- Individual cables can be easily loosened and replaced for troubleshooting, maintenance or retrofitting
- Mix & Match: interlocking seal allows for any combination of the three different cablefix versions to custom fit it to your application
- Blanking plugs are supplied to seal unused holes

### Fitting Specifications

Material	Polyamide PA
Temperature range	-30°C - +70°C / 22°F - +212°F
Halogen free	Yes
Burning behavior	Polyamide plate according to UL 94 V2
Silicone free	Yes
Enclosure wall thickness	maximum 3 mm
Protection class	IP55
Seal	NBR60 oil resistant

Specifications are subject to change without prior notice

Part No.	Type	Dimensions (WxHxD) mm	Cut out W x H mm	Number of Cables x Cable OD - Ø mm
<b>600320</b>	1xB/V	50.0 x 50.0 x 10.0	46 x 46	2 x 6.1-8.8 + 2 x 7.8-10.7
<b>600321</b>	1xS/A	50.0 x 50.0 x 10.0	46 x 46	8 x 3.8-6.3
<b>600347</b>	1xST	50.0 x 50.0 x 10.0	46 x 46	6 x 6.3-8.9

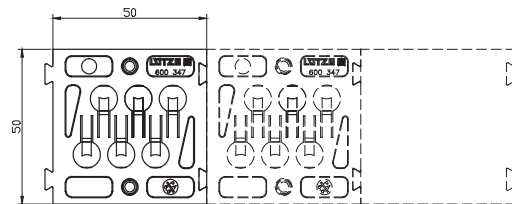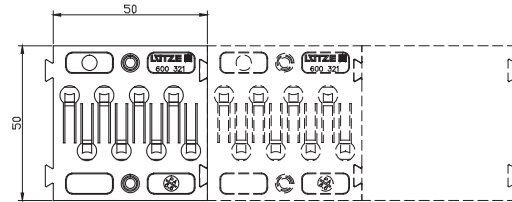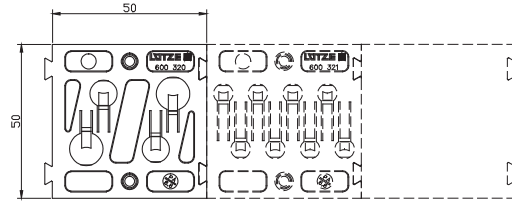

# 7 Network Connectivity

## Industrial Connectors and Panel Pass Through Devices



# LUTZE Network Connectivity Products

## Industrial Network Connectors



### Application

- Industrial USB connectivity

### Characteristics

- Available with or without cord
- 7 different cord lengths
- Female / Female 1:1 or Female / Male 1:1
- Backwards compatible with USB 2.0
- Standard 22.5 mm cut out
- Easy to install

### Technical Data

Temperature	-25°C - +70°C/ -13°F - +158°F
Protection class	Type 12 IP65 cap closed, IP20 in inserted operation
Shielding	yes
Transmission	5 Gigabit/sec
Performance	
Contact material	CuSN, gold-plated
Rated current	900 mA per contact
Bending radius	15 x cable OD
Dimensions (DxD)	29.5 mm x 29 mm
Approvals	UL

## USB 3.0 “SuperSpeed” Panel Connector



Part No.	Description	Cord Length
<b>490112</b>	USB 3.0 A/A F/F	N/A
<b>490113.0030</b>	USB 3.0 A/A F/M	0.3 m / 11.8"
<b>490113.0060</b>	USB 3.0 A/A F/M	0.6 m / 23.6"
<b>490113.0080</b>	USB 3.0 A/A F/M	0.8 m / 31.5"
<b>490113.0150</b>	USB 3.0 A/A F/M	1.5 m / 59.0"
<b>490113.0200</b>	USB 3.0 A/A F/M	2.0 m / 78.7"
<b>490113.0300</b>	USB 3.0 A/A F/M	3.0 m / 118.0"
<b>490113.0500</b>	USB 3.0 A/A F/M	5.0 m / 196.8"

### Application

- Industrial Ethernet connectivity
- Cat5e or Cat6 available

### Characteristics

- Female / Female 1:1
- Gold-plated 8 pin (4 pair) connection
- Standard 22.5 mm cut out installation
- Easy to install

### Technical Data

Temperature	-25°C - +70°C/ -13°F - +158°F
Protection class	Type 12 IP65 cap closed, IP20 in inserted operation
Shielding	360°
Contact material	CuSN, gold-plated
Rated current	1.5A
Dimensions (DxD)	29.5 mm x 29 mm
Approvals	UL

## RJ45 Panel Pass Through



Part No.	Description	Category	Transmission Performance
<b>492075</b>	RJ45 F/F 8/8	Cat5e	100 MHz
<b>491075</b>	RJ45 F/F 8/8	Cat6	250 MHz



Specifications are subject to change without prior notice



# LUTZE Network Connectivity Products

## Industrial Network Connectors

### Application

- Industrial Ethernet connectivity
- Power over Ethernet
- Cat6a

### Characteristics

- IDC - Insulation Displacement Connector
- Cable entry: straight or 90°
- Zinc die-cast housing
- Quick connect technology
- Field wireable
- Easy to install

### Technical Data

Temperature	-40°C - +85°C/ -40°F - +185°F
Protection class	IP20
Transmission frequency	10 Gigabits/s
Rated current	Max 1.0A per contact
Shielding	360°
Contact material	Spring steel 0.8 µm gold-plated
Conductor OD	AWG 27-22
Cable OD	5 – 9 mm, straight 5.5 – 10 mm, 90°
Approvals	UL
Item specific certification:	490128, 490129, 490151 CC-link IE Field

## RJ45 IDC Industrial Connector Cat6a



CC-Link IE  
Field

Part No.	Description	Cable Cross section	Color Code
490128	RJ45 – M 8 pol. Cat6a	Solid 24/1-22/1 Stranded 27/7-22/7	T568B
490129	RJ45 – M 8 pol. Cat6a	Solid 24/1-22/1 Stranded 27/7-22/7	T568A
490138	RJ45 – M 8 pol. Cat6a	Solid 26/1-24/1 Stranded 27/7-24/7	T568B
490151	RJ45 – 4x90° 8 pol. Cat6a	Solid 24/1-22/1 Stranded 27/7-22/7	T568B

### Application

- Industrial Ethernet connectivity

### Characteristics

- 17 mm cut out installation
- Female / Female 4:4 or 8:8
- Easy to install

### Technical Data

Temperature	-25°C - +85°C/ -13°F - +185°F
Protection class	IP 67 in inserted operation
Rated current	Max 1.0A per contact
Shielding	360°
Contact material	gold-plated phosphor bronze
Dimensions	29.5 x 29 mm

## M12 / RJ45 Panel Pass Through



Part No.	Description	No. Poles	Transmission Performance
490105	M12 / RJ45 F/F 90° Cat5	4	100 Megabit/sec
490106	M12 / RJ45 F/F 180° Cat5	4	100 Megabit/sec
490107	M12 / RJ45 F/F 90° Cat5e	8	1 Gigabit/sec
490108	M12 / RJ45 F/F 180° Cat5e	8	1 Gigabit/sec

## 8 Technical Overview

<b>LUTZE SILFLEX®</b> .....	85
<b>LUTZE SUPERFLEX®</b> .....	86
<b>LUTZE SUPERFLEX® High Flexing Cable Cycle Rating</b> .....	87
<b>Handling and Installation of LUTZE SUPERFLEX®</b> .....	88
<b>BUS and Network</b> .....	90
<b>ETHERNET – Overview</b> .....	91
<b>DRIVEFLEX® VFD and Servo Motor Cable</b> .....	93
<b>Motor, Servo and Drive Applications</b> .....	94
<b>Approvals for North America</b> .....	95
<b>NFPA 79, 2015 Edition</b> .....	96
<b>Ampacity per NFPA 79, 2015 Edition</b> .....	97
<b>Ampacity per National Electric Code (USA)</b> .....	98
<b>Motor, VFD and Servo Cable Selection by Horsepower</b> .....	99
<b>Conductor Stranding</b> .....	100
<b>Conductor Markings</b> .....	101
<b>Chemical Resistance of PVC, TPE and PUR Cable Jackets</b> .....	103
<b>Protection Class Designation</b> .....	104
<b>Thread Tables for Fittings</b> .....	105
<b>Torque Recommendations for Fittings</b> .....	106
<b>Fittings Selection Chart</b> .....	107
<b>Part Number Index</b> .....	115

# LUTZE SILFLEX®

## LUTZE SILFLEX® - The Flexible Cable for Harsh Industrial Environments


LUTZE SILFLEX® cables are suitable for stationary and flexible applications without continuous linear movement (not recommended for drag chains) and allow easy installation in the field.

LUTZE SILFLEX® cables are available in control and power cable configurations.

These cables are flexible for easy routing to the machine and are designed to withstand the exposure to various harsh industrial environments.

LUTZE SILFLEX® can be used in machine tools, machine and plant construction, industrial HVAC technology, assembly and production lines as well as many other industrial applications.

LUTZE SILFLEX® cables are silicone free and are approved by many Automotive manufacturing plants.

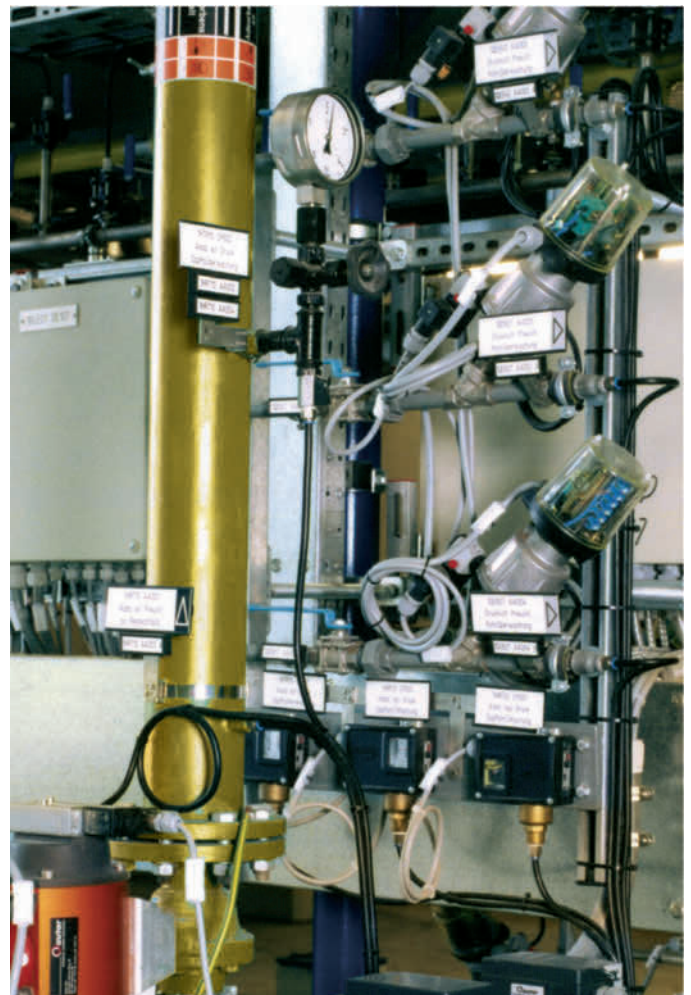



## LUTZE SUPERFLEX® sets Industry standards: Longevity, Reliability, Flexibility

LUTZE offers a variety of high flexing cables specifically designed for use in continuous motion applications such as drag chains. LUTZE SUPERFLEX® and LUTZE SUPERFLEX® Plus cables include high flexing control and motor supply cables, as well as electronic and network cables.

All LUTZE SUPERFLEX® cables are compatible with all major brand drag chains.

LUTZE SUPERFLEX® N is designed for moderate to higher performance flexing in short to medium length drag chains.

LUTZE SUPERFLEX® N is offered with PVC or High Glide Insulation (TPE) insulation and with specially formulated PVC jacket.

LUTZE SUPERFLEX® Plus PUR is designed for high performance flexing or longer drag chains. LUTZE SUPERFLEX® Plus PUR contains high grade premium materials such as High Glide TPE insulation and PUR jackets for high performance applications in modern high speed machine tools.

All high flexing cables require special handling and installation techniques which are different from those of standard flexible control cables. To ensure the longest possible life span for your cable, it is important to follow installation procedures precisely.



# LUTZE Technical Overview

## LUTZE SUPERFLEX® High Flexing Cable Cycle Ratings

The demanding mechanical requirements in c-tracks require the use of specially designed cables, constructed for continuous flexing. The lifetime of cables in c-tracks highly depends on the mechanical parameters of the application, but also on proper handling and installation of the cable.

Cable Type	Traveling distances	Bending Radius	Speed	Acceleration	Cycles
<b>LUTZE SUPERFLEX® PLUS PUR</b>					

Unshielded cables with special TPE or High Glide Insulation, PUR or TPE jackets	< 16 ft / 5 m	> 10 Ø	< 3 m/s	< 5 m/s <sup>2</sup>	20,000,000
	< 67 ft / 20 m	> 7 Ø	< 5 m/s	< 10 m/s <sup>2</sup>	10,000,000
	< 328 ft / 100 m	> 7 Ø	< 5 m/s	< 10 m/s <sup>2</sup>	2,000,000

<b>LUTZE SUPERFLEX® PLUS (C) PUR</b>					
--------------------------------------	--	--	--	--	--

Shielded cables with special TPE or High Glide Insulation, special sub-jackets, and PUR or TPE jackets	< 16 ft / 5 m	> 12 Ø	< 3 m/s	< 5 m/s <sup>2</sup>	20,000,000
	< 67 ft / 20 m	> 10 Ø	< 5 m/s	< 10 m/s <sup>2</sup>	10,000,000
	< 328 ft / 100 m	> 10 Ø	< 5 m/s	< 10 m/s <sup>2</sup>	2,000,000

<b>LUTZE SUPERFLEX® N</b>					
---------------------------	--	--	--	--	--

Unshielded cables with special TPE or High Glide Insulation, PVC and Alloy jackets e.g. A138 series	< 16 ft / 5 m	> 12 Ø	< 3 m/s	< 5 m/s <sup>2</sup>	10,000,000
	< 49 ft / 15 m	> 10 Ø	< 5 m/s	< 10 m/s <sup>2</sup>	5,000,000

<b>LUTZE SUPERFLEX® N (C)</b>					
-------------------------------	--	--	--	--	--

Shielded cables with special TPE or High Glide Insulation, fleece wrap or sub-jackets PVC and Alloy jackets e.g. A139 series	< 16 ft / 5 m	> 15 Ø	< 3 m/s	< 5 m/s <sup>2</sup>	10,000,000
	< 49 ft / 15 m	> 12 Ø	< 5 m/s	< 10 m/s <sup>2</sup>	5,000,000

The data in this table shows actual application parameters and accomplished cycles in independent tests. Flexing cycle performance can only be compared by looking at all the data. A rating of "millions of operations" is meaningless if the distance, speed and bend radius is unknown.

## LUTZE SUPERFLEX® Plus M (C) PUR UL Servo 0,6/1 kV, per SIEMENS®\* standard acc. to SIEMENS MOTION-CONNECT 800PLUS\*

Traveling distances	Bending Radius	Speed	Acceleration
< 10 ft / 3 m	> 10 Ø	< 5 m/s	< 50 m/s <sup>2</sup>
< 16 ft / 5 m	> 10 Ø	< 5 m/s	< 30 m/s <sup>2</sup>
< 32 ft / 10 m	> 10 Ø	< 5 m/s	< 15 m/s <sup>2</sup>
< 49 ft / 15 m	> 10 Ø	< 5 m/s	< 10 m/s <sup>2</sup>
< 164 ft / 50 m	> 10 Ø	< 5 m/s	< 5 m/s <sup>2</sup>

\*registered trademark








# Handling & Installation LUTZE SUPERFLEX® – Quick Overview

## 1. Selecting Cables for Continuous Motion Applications – C-Tracks

We recommend special high flexing cables such as LUTZE SUPERFLEX® cables, for use in C-tracks to ensure long life times:



- LUTZE SUPERFLEX® cable is proven to be compatible with all major brands of C-tracks.
- LUTZE SUPERFLEX® N is designed for moderate flexing in short to medium length C-tracks.
- LUTZE SUPERFLEX® Plus PUR is designed for high performance flexing or longer C-tracks.

High Flexing Cables such as LUTZE SUPERFLEX® cables are different from standard flexible cables:





Standard Flexible Cables – LUTZE SILFLEX®	High Flexing Cables – LUTZE SUPERFLEX®
 <ul style="list-style-type: none"><li>• Low number of strands per conductor</li><li>• longer pitch layering</li><li>• designed as a pliable cable for easy routing and installation</li></ul> <p>Static</p> <p>Periodical Free Flexing</p> <p>Bend &amp; Route</p>  <ul style="list-style-type: none"><li>• no central core</li><li>• mostly PVC as insulation material</li><li>• foil shield or braid shield</li><li>• jacket material depends on application</li></ul>	 <ul style="list-style-type: none"><li>• high number of super fine strands per conductor</li><li>• short pitch layering</li><li>• conductors are cabled without back twist</li><li>• higher quality of materials</li><li>• slower and more complex manufacturing process on high-end equipment</li><li>• designed for linear constant motion</li></ul>   <ul style="list-style-type: none"><li>• central core for single layer construction</li><li>• special PVC or TPE as insulation material</li><li>• tinned copper braid shield</li><li>• high abrasion resistant jacket material such as PUR</li></ul>

# Handling & Installation LUTZE SUPERFLEX® – Quick Overview

## 2. Correct Handling of LUTZE SUPERFLEX® Cables
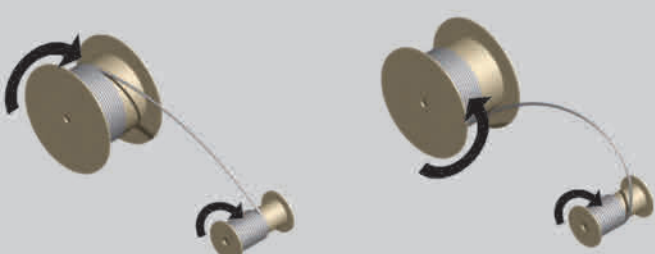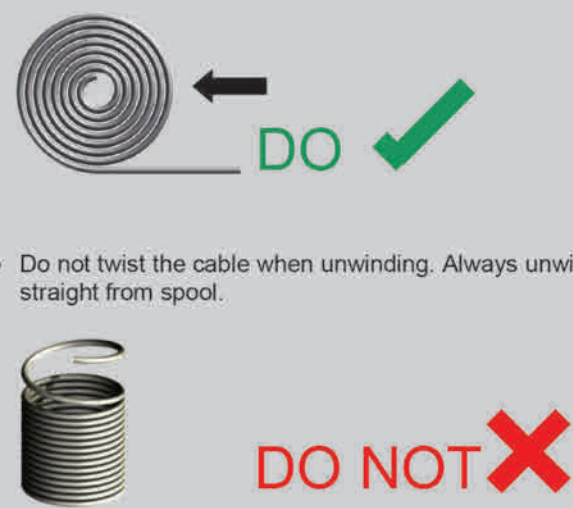
<ul style="list-style-type: none"><li>When unreeling the cable, do not change the bend direction. The cable has to go on the new reel in the same direction it came off the reel. Low and equal tensile force during spooling!</li></ul>  <p><b>DO</b> ✓ <b>DO NOT</b> ✗</p>	<ul style="list-style-type: none"><li>Ring put ups require careful uncoiling by rolling the ring upright over the floor.</li><li>Do not twist the cable when unwinding. Always unwind straight from spool.</li></ul>  <p><b>DO</b> ✓ <b>DO NOT</b> ✗</p>
---	--

## 3. Correct Installation of LUTZE SUPERFLEX® Cables
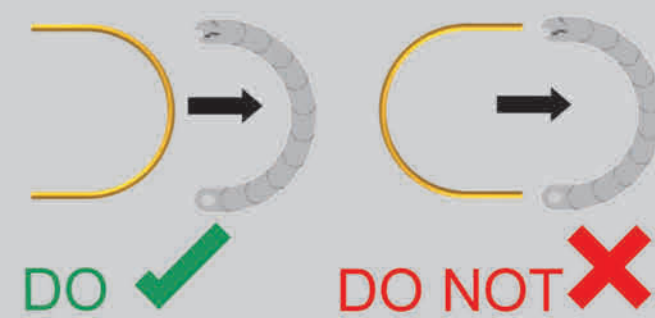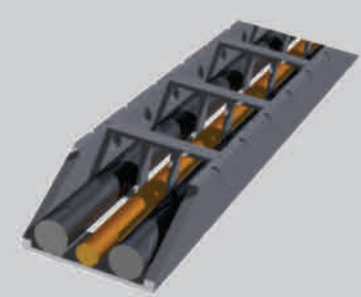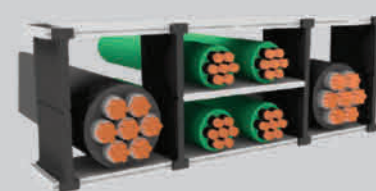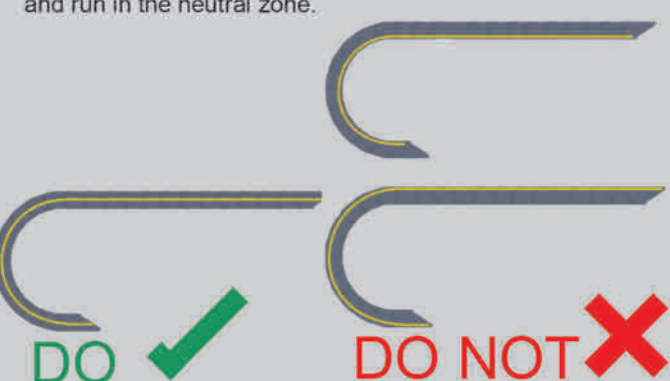
<ul style="list-style-type: none"><li>Cable retains bend from reel. Do not flex against original bend or relax cable for 24 hrs by laying it flat.</li></ul>  <p><b>DO</b> ✓ <b>DO NOT</b> ✗</p>	<ul style="list-style-type: none"><li>Try to ensure balanced weight distribution. If you have more than one heavy cable, we recommend installing the heavy cables evenly to each side of the track.</li></ul> 
<ul style="list-style-type: none"><li>Use dividers horizontally and vertically to separate the track into separate cavities. Install just one cable per separated cavity. If absolutely necessary, two small or a small and a big cable can share a cavity.</li></ul> 	<ul style="list-style-type: none"><li>Observe the minimum bending radius for optimum performance. Make sure that all cables are length-adjusted and run in the neutral zone.</li></ul>  <p><b>DO</b> ✓ <b>DO NOT</b> ✗</p>

For further information please visit: [www.lutze.com/superflex](http://www.lutze.com/superflex)

# BUS and Network Cables



## BUS and Network cables

BUS-Systems have become a very vital part of factory automation and it is hard to imagine automation without them. Besides hardware and software components, passive components such as bus cables and connectors play an important role for reliable function of the system. Bus cables must comply with all electrical parameters of the particular system. There is no universally applicable bus cable as the individual requirements are too diverse.

Lutze offers robust, industrial grade Bus and Network cables for the most common used systems worldwide. These cables are being offered for stationary and flexible applications as well as continuous moving applications in drag chains.

## Systems:

### ASI – Actuator-Sensor-Interface

The AS-Interface per EN 50295 is a serial Actuator Sensor Network being used for digital signals in lower field levels. It works in accordance to the Master Slave Principle and presents a cost effective alternative to other serial bus systems.

### Profibus

Profibus is the most common Bus System used in Europe in the area of automated manufacturing.

### Profibus PA

The engineering of these cables per IEC 61158-2 fulfills the requirements in process automation and also offers intrinsically safe connection to the field devices. Profibus PA is a synchronous protocol with DC-current flow free transmission, which is also often designated as H1. The IEC 61158-2 technique is applied at the Profibus PA.

### Profibus DP

This Profibus variant, optimized through increased transmission speed and low installation cost, was especially designed for the communication between automation systems and decentralized peripheral devices in the field range. Profibus DP substitutes the conventional parallel data communication with 24V or 0-20 mA. Lutze Profibus cables meet the specification for Profibus DP type A according to EN 50254. Profibus DP und Profibus FMS use the same transmission technology as well as a unified BUS protocol. Both variants can be operated simultaneously on one cable.

### Profibus Fast Connect®

These cables have an optimized radial, symmetrical construction and can facilitate the application of special tools. Thereby, bus connector plugs are able to be assembled in a fast and installation-friendly way.

### CAN-Bus

CAN-Bus is specified according to ISO 11898. Primarily designed for automotive applications CAN-Buses are used today for the exchange of digital information, Controller Area Network (CAN) for faster data transfer/data exchange.

### Interbus

The Interbus-S was published in 1987 as an open sensor/actuator bus protocol. As a typical sensor/actuator fieldbus, it is configured for the cyclic processing of process data and hence differentiates significantly from data orientated field buses. The main application area of Interbus-S lays in production engineering, process engineering, as well as transport and logistics. Here the main focus is both the automotive industry and the drive technology.

### DeviceNet

DeviceNet is a service related Network, based on the proven CAN-Technology for fast data exchange. The configuration consists of thick cable (aka Trunk cable) and thin cable (aka drop cable). The use of high flexing cables in drag chains is likewise possible. DeviceNet has been standardized by Open DeviceNet Vendor Association (ODVA) and is the leading bus system for industrial automation in North America.

### Industrial ETHERNET

ETHERNET is the most commonly used communication technology. The ETHERNET Standard allows for a remarkable increase in the bandwidth, from 12 Mbits/s for a bus system, to up to 10Gbit/s. In the office world the ETHERNET Standard has already established itself as the standard technology, however the requirements for wiring systems and active components in the industrial environment differ greatly from those in an office environment. On one hand the infrastructure must be more robust; and on the other hand criteria such as real time application require special IT solutions. Consequently, this has resulted in the development of various proprietary systems such as ProfiNet, EtherCAT, Modbus TCP and Powerlink with system specific components which may not be compatible with others. A structured Ethernet cabling according to EN 50173-3 should support each proprietary system. While Lutze offers a large number of industrial ETHERNET cable solutions we are pleased to offer a special innovation with our drag chain suitable Cat6 ETHERNET cable.



# ETHERNET – Overview

## 1) Correct Handling and Installation of Network Copper Cable

- Do not subject cable to tension
- Do not kink the cable
- Do not bend the cable more than 90° (See individual specifications for bending radius)
- Strip the cable as short as possible
- Do not crush cable when fastening
- Do not untwist the conductor pairs by more than 0.5 inch
- Terminate the shielding on both ends

## 2) LUTZE ETHERNET Cables

We recommend shielded industrial ETHERNET cable, such as LUTZE ETHERNET cable, for use in industrial environment to ensure secure connectivity. Motors and other electrical noise producing devices are often located in close proximity to network cabling. EMI (Electro Magnetic Interference) and RFI (Radio Frequency Interference) can distort data transmission on copper-based network cable. To lessen or eliminate interference, called alien-crosstalk, the use of shielded industrial cable and connectors is recommended.

Available LUTZE ETHERNET Cables:



S/UTP	SF/UTP	SF/UTQ	S/FTP
Susceptibility for Interference			
some	low		low
104337 CAT 5e	104335 CAT 5e	104301 CAT 5e	104338 CAT 6 <sub>A</sub>
	104336 CAT 5e	104307 CAT 5e	104397 CAT 6 <sub>A</sub>
	104396 CAT 5e	104302 CAT 5e	104331 CAT 7
	104349 CAT 5e	104303 CAT 5e	
	104347 CAT 6	104379 CAT 5e	

## 3) Key for Twisted Pair Cables according to ISO/IEC-11801 (2002)E

**XX/YYZ**

**XX** for the outer shielding / **Y** for the pair shielding / **ZZ** for the pair arrangement

**U** = unshielded / **U** = unshielded / **TP** = twisted pair (regular)

**F** = foiled shield / **F** = foiled shield / **TQ** = quad pair (star quad)

**S** = braided shield / **S** = braided shield

**SF** = braided and foiled shield

In order to utilize EMI/RFI shielding, the shield must be properly terminated at both ends!

## 4) ProfiNet Star Quad Design and Termination

The star quad is a specific low-impedance cable configuration. Four conductors are twisted on a common axis. The conductors across from each other make a pair.


In **Figure 1** the pairs are as follows:

**Pair 1:**

Conductor A ←→ Conductor D

**Pair 2:**

Conductor B ←→ Conductor C



**Figure 1**

**Other terminations than in Figure 1 lead to interferences, decreased connectivity or no connectivity at all.**

# ETHERNET – Overview

## 5) Pin Assignment and Installation

RJ45 is the most common ETHERNET connector and is available both shielded and unshielded. All pins of the RJ45 connector are used for 1000 Mbit/s (4-pair transmission). Four pins are used for 10/100 Mbit/s (2-pair transmission).

According to the EN 50173 standard, two color codes are defined for installation: T568A and T568B. It makes no difference which color code is used, however the same code should be used consistently throughout the entire installation. Mixing up the two color codes will result in malfunctions.

### Pin assignment RJ 45 - Color code according to EN 50173 – hard wiring:

ETHERNET cables									
Star Quad (ProfiNet)			Regular Twisted Pair						
PIN#	100BASE-TX	Color code	10BASE-T, 100BASE-TX	1000BASE-T		Color code T568A		Color code T568B	
1	Transmit+	yellow	Transmit+	BI_DA+	(bidirectional)	WH/GN		WH/OG	
2	Transmit-	orange	Transmit-	BI_DA-	(bidirectional)	GN		OG	
3	Receive+	white	Receive+	BI_DB+	(bidirectional)	WH/OG		WH/GN	
4	-		-	BI_DC+	(bidirectional)	BU		BU	
5	-		-	BI_DC-	(bidirectional)	WH/BU		WH/BU	
6	Receive-	blue	Receive-	BI_DB-	(bidirectional)	OG		GN	
7	-		-	BI_DD+	(bidirectional)	WH/BN		WH/BN	
8	-		-	BI_DD-	(bidirectional)	BN		BN	

## 6) ETHERNET Categories and Classes

	ProfiNet®	CAT 5e	CAT 5e	CAT 6	CAT 6a	CAT 7
Class	D	D	De	E	Ea	F
Construction	2 pair (AWG 22)	2 pair (AWG 24, AWG 26)	4 pair (AWG 24, AWG 26)	4 pair (26 AWG)	4 pair (26 AWG)	4 pair (26 AWG)
Speed	10/100 Mbit/s	10/100 Mbit/s	10/100/1000 Mbit/s	10/100/1000 Mbit/s	10/100/1000/10000 Mbit/s	10/100/1000/10000 Mbit/s
LAN Applications (max.)	10BASE-T (2 pair) 100BASE-TX (2 pair)	10BASE-T (2 pair) 100BASE-TX (2 pair)	10BASE-T (2 pair) 100BASE-TX (2 pair) 1000BASE-T (4 pair)	10BASE-T 100BASE-TX 1000BASE-T 10GBASE-T	10BASE-T 100BASE-TX 1000BASE-T 10GBASE-T	10BASE-T 100BASE-TX 1000BASE-T 10GBASE-T
Nominal impedance	100 Ohm	100 Ohm	100 Ohm	100 Ohm	100 Ohm	100 Ohm
Bandwidth	100 MHz	100 MHz	100 MHz	250 MHz	500 MHz	600 MHz
Max. length	328 ft (10BASE-T) 328 ft (100BASE-TX)	328 ft (10BASE-T) 328 ft (100BASE-TX)	328 ft (10BASE-T) 328 ft (100BASE-TX) 328 ft (1000BASE-T)	328 ft (10BASE-T) 328 ft (100BASE-TX) 328 ft (1000BASE-T)	328 ft (10BASE-T) 328 ft (100BASE-TX) 328 ft (1000BASE-T) 328 ft (10GBASE-T)	328 ft (10BASE-T) 328 ft (100BASE-TX) 328 ft (1000BASE-T) 328 ft (10GBASE-T)
CAT compatibility	CAT 5e	CAT 5e	CAT 5e	CAT 5e	CAT 5e, CAT 6	CAT 5e, CAT 6, CAT 6a
ISO/IEC standard	-	ISO/IEC 11801	ISO/IEC 11801	ISO/IEC 11801	Amendment 1 to ISO/IEC 11801	ISO/IEC 11801
ANSI/TIA standard	-	ANSI/TIA-568-B	ANSI/TIA-568-C.2	ANSI/TIA-568-C.2	ANSI/TIA-568-C.2	Not recognized




# LUTZE Technical Overview

## LUTZE DRIVEFLEX® VFD and Servo Motor Cable

A Variable Frequency Drive (VFD) is a device designed for alteration of a motor's rotational speed by changing the frequency and the voltage of the electrical power supplied to it. In this manner, the rotational speed can be adjusted within a wide range from standstill to above the nominal rotation speed at 60 hertz.

The second main feature of a VFD is that it offers motor torque control. To avoid overload of the motor, the torque has to decrease when running the motor at higher speeds and vice versa. In VFD applications the constant frequency of 60 hertz in a sinusoidal waveform is altered into a variable frequency as shown in the Illustration.



The use of VFD technology poses high demands on the cable connecting the motor to the drive. Standard 600V control cable does not meet the requirements of VFD applications, thus causing operating malfunctions and may result in premature cable failure. High switching frequencies and harmonic waves cause high capacitive charging current and overvoltage spikes well beyond the 600V rating of standard control cables. These problems put tremendous stress on cables and the stress even increases further the longer the distance between drive and motor.

Another stress factor is called “corona discharge effect”. Insulated conductors have very small gaps between the copper strands and the insulation material caused by the irregular surface of stranded conductors. This can lead to an uncontrolled corona discharge across these gaps and break down the insulation over time. This problem is well known in medium voltage applications. LUTZE offers a premium solution to

address the different requirements for VFD and motor cable:

### LUTZE DRIVEFLEX® VFD and Servo Cable

#### A premium solution with XLPE insulation

XLPE is an insulation material with very low capacitance offering superior electrical characteristics for use as a VFD cable, especially in long cable runs. The XLPE insulation is a thermo-set material with a very high voltage breakdown level, thus inherently addressing the corona discharge effect and making it the premium insulation for any type of drive application. XLPE insulation is recommended by most drive manufacturers, and LUTZE DRIVEFLEX® exceeds the VFD cable requirements by Rockwell™ as stated in the “Wiring and Grounding Guidelines for Pulse Width Modulated (PWM) AC Drives” document. The extra thick insulation offers a nominal voltage rating of 1000V 90°C per UL Flexible VFD & Servo cable specifications. The insulation is designed to withstand even higher voltage spikes and power distortions that can commonly occur in VFD applications. A foil and braid shield combination with drain wire ensures compliance with EMC requirements. LUTZE DRIVEFLEX® XLPE is the most flexible XLPE cable in its class - offering easy stripping & installation, thus saving time and money.

DRIVEFLEX® has also been evaluated as flexible VFD and Servo cable and is UL listed for use on Drives and Servos, as well as tray cable exposed run (TC-ER). The DRIVEFLEX® cable family includes many different configurations compatible with many standard Drive and Servo Systems.



For more information, please visit [www.driveflex.com](http://www.driveflex.com).

# Motor, Servo and Drive Applications

## LUTZE offers a wide range of cables especially designed for motor supply applications

### Unshielded Motor Supply Cable

For any standard motor supply application without the use of VFD's, and where shielding is not required, we recommend the use of **LUTZE SILFLEX® Tray-ER TPE, unshielded** cables with PVC/Nylon insulation. These cables are available in sizes up to 4/0 and offer superior flexibility paired with ruggedness due to the premium TPE jacket. These power tray cables offer the ability to be installed within and outside the cable tray due to the TC-ER and MTW ratings in accordance with NEC article 336.

### Variable Frequency Drives (VFD, VSD)

For any motor supply application involving an AC Variable Frequency Drive, we recommend **LUTZE DRIVEFLEX®** cables with **XLPE** insulation. These cables have very low capacitance, high impedance and high voltage breakthrough resistance. XLPE insulation is the superior choice for VFD applications with pulse width modulation (PWM) to cope with high voltage spikes and power distortions from the VFD output. These cables are UL listed Flexible motor supply / Flexible VFD Servo cable and TC-ER Power Tray cables.



#### **LUTZE DRIVEFLEX® XLPE (C) PVC, Shielded A106 with XLPE Insulation type XHHW-2**

Small diameter flexible VFD & Motor Supply Cable with 4 conductors including one full size ground. Suitable for all generic drive applications with classic three phase wiring and for any direct, reversing or soft starter application.



#### **LUTZE DRIVEFLEX® XLPE (C) PVC, Shielded A107 with XLPE Insulation type XHHW-2**

Small diameter flexible VFD & Motor Supply Cable with 4 conductors including one full size ground, plus one twisted shielded pair for feedback. Suitable for servo systems such as Rockwell\*, Siemens\* etc., which require one control pair.



#### **LUTZE DRIVEFLEX® XLPE (C) PVC, Shielded A216 with XLPE Insulation Type RHW-2/XHHW-2**

Flexible VFD & Motor Supply Cable with 4 conductors including one full size ground. Low capacitance design allowing for longer cable runs. Suitable for all generic drive applications with classic three phase wiring.



#### **LUTZE DRIVEFLEX® XLPE (C) Servo I PVC, Shielded A217 with insulation Type RHW-2/XHHW-2**

Flexible VFD & Motor Supply Cable with 4 conductors including one full size ground, plus one twisted shielded pair for feedback. Low capacitance design allowing for longer cable runs. Suitable for servo systems such as Rockwell\*, Siemens\* etc., which require one control pair.



#### **LUTZE DRIVEFLEX® XLPE (C) Servo II PVC, Shielded A218 with insulation Type RHW-2/XHHW-2**

Flexible VFD & Motor Supply Cable with 4 conductors including one full size ground, plus two twisted shielded pairs for feedback. Suitable for servo systems such as Rockwell\*, Indramat\* etc., which require two control pairs.



#### **LUTZE DRIVEFLEX® XLPE (C) Symmetrical Grounds PVC, Shielded A220 1kV with insulation type XHHW-2**

Flexible VFD & Motor Supply Cable with 3 symmetrical grounds 1kV. The symmetry in the conductor design reduces motor frame voltage induced by high motor current. Symmetrical ground cable is recommended by ABB\* and Rockwell\* for larger horsepower motors.

### Flexing cable for Servo Systems and motion control

For any continuous moving application with a Servo Drive, we recommend our special low capacitance cables with TPE or LUTZE High Glide Insulation (HGI) based on Polypropylene such as **LUTZE SUPERFLEX®PLUS M (C) PUR UL SERVO 0,6/1 kV** for high flexing applications in drag chains.



\*registered trademarks not associated with LUTZE

# Approvals for North America

## Different UL Ratings for Cables

Product approvals in North America will often be conducted by the National Recognized Testing Laboratories (NRTL). The NRTLs are determined by the Occupational Safety and Health Administration (OSHA). You can find a list of the current NRTLs on [www.osha.gov](http://www.osha.gov). LUTZE mainly uses Underwriters Laboratories (UL) to certify the products. UL (USA) and CSA (Canada) have an agreement that allows the usage of one approval for both USA and Canada.

In general there are two main certification classes:

Certification	Logo	Meaning
UL Recognized		"UL Recognized" signifies that the product is rated as a component. A component is a part of an application. Cables with an "Appliance Wiring Material" (AWM per Standard 758) are always "recognized". Typically these cables are already installed on the machine when it ships.
UL Listed		"UL Listed" signifies a cable as actually tested and proven for a specific use. This way the cable has to match the UL Standards and the requirements of the National Electric Code (NEC). Typically, cables with a UL Listing are used for field wiring in North America.

UL Listing type	Description	Meaning
CM	Communication	Cables for data communication per UL category DUZX and NEC 800
CMG	Communication General	Cables for data communication per UL category DUZX and NEC 800
CMX	Communication Residential	Cables for data communication with restrictions per UL category DUZX and NEC 800
PLTC	Power Limited Tray Cable	Cables for tray applications per UL category QPTZ and NEC 725
PLTC-ER	Power Limited Tray Cable Exposed Run	Exposed Run Cables for tray applications per UL category QPTZ and NEC 725 (exposed use possible)
ITC	Instrumentation Tray Cable	Instrumentation cables for tray applications per UL category NYTT and NEC 727
ITC-ER	Instrumentation Tray Cable Exposed Run	Instrumentation cables for tray applications per UL category NYTT and NEC 727 (exposed use possible)
TC	Power and Control Tray Cable	Power and control cables for tray applications per UL category QPOR and NEC 336
TC-ER	Power and Control Tray Cable Exposed Run	Power and control cables for tray applications per UL category QPOR and NEC 336 (exposed use possible)
TC-ER-JP	Power and Control Tray Cable Exposed Run, Joist Pull	TC-ER cable that is suitable for pulling through structural members is marked "JP" per NEC article 336.10(10)
Bus Drop	Bus Drop Cable	Bus drop cable to create branches from busways per NEC 368.56 (B)
MTW	Machine Tool Wire	Single or multi conductor control cables for Machine Tool Wiring per UL category ZKHZ and NEC 670
Flexible VFD and Servo	Flexible VFD and Servo aka Flexible Motor Supply Cable	Power cables for motor and variable frequency drive applications per UL category ZJFH
WTTC	Wind Turbine Tray Cable	Power and control cables for wind turbine applications per UL category ZGZN

This list only shows the common UL Listings for typical applications in the field of automation and does not stand for a complete overview of the current UL Listings.

It is possible to combine different UL Listings in one cable. LUTZE offers a variety of cables with UL Listings for various industrial applications.

# LUTZE Technical Overview

## NFPA 79 Cable Requirements

NFPA 79 is the Electrical Standard for Industrial Machinery in the USA. The 2015 edition has once again implemented a number of significant updates which affect cable. The NFPA 79 is a standard published by the National Fire Protection Agency, the same agency that publishes the National Electric Code (a.k.a. NEC or NFPA 70).

The NFPA 79 has special provisions addressing safe wiring practices for industrial machinery such as machine tools. Article 12.9 was added to the 2012 edition, allowing the use of appliance wiring material (type AWM) to be used with industrial machinery again but is limited with special provisions. The use of such cable had been prohibited under the previous edition 2007, and this restriction had caused a lot hardship for many machine manufacturers, which is now resolved.

NFPA 79 still makes mainly references to listed cable. These cables carry an NRTL listed logo such as the “UL listed” logo. It should be noted that cables can have dual or multi ratings and carry both marks, UL recognized and UL listed along with other marks.

Permitted for all applications:   

Appliance Wiring Material is regulated by UL 758 and carries the recognized logo:

Since 2012 permitted for special applications:  

In order to use AWM type cable on industrial machinery and be compliant with NFPA 79, the cable must accommodate the provisions stated in article 12.9 “Special Cables and Conductors” of the NFPA 2015 edition.

It is sufficient to comply with one of the sections in sections 12.9.2.1 through 12.9.2.3 instead of meeting their requirements in combination. For example:

1. It is permissible to use AWM cable or conductors if part of a listed assembly.
2. Or it is permissible to use AWM cable or conductors if specified for use with approved equipment and in accordance with the equipment manufacturer’s instructions. One example would be a Servo Drive system with a cable assembly made per the Servo-Drive System Manufacturer’s specification and installed per the manufacturer’s instructions.
3. Or it is permissible to use AWM cable or conductors if compliant with 12.9.2.3 and the modifications as described. These modifications will allow those types of AWM cables which are suitable for industrial use by their nature. However, it will control the misuse of AWM cables which do not meet industrial application requirements, e.g. voltage rating, insulation thickness, oil resistance, etc.

All LUTZE AWM cables are designed for use in industrial environments and the AWM style and voltage rating is clearly marked on each cable jacket. However, for field installation it will still be safest to rely on cable that is UL listed and verified for the intended use. UL listed cable will make it easier to evaluate a machine in the field and will therefore remain a very important choice for most machine builders in the USA. UL listed cable will also eliminate the need for documentation that the use of AWM cable may require.

Please contact your LUTZE representative on questions regarding our offering on UL listed and UL recognized cable to help you be compliant with the latest standards for industrial machinery.

LUTZE offers many listed types, including MTW, TC-ER, PLTC and CM marks. Cables with these markings are considered listed types and are always permitted to be used in NFPA 79 compliant applications.

# Ampacity per NFPA 79 (2015 Edition)

12.5.1 The ampacities of conductors shall not exceed the corresponding temperature values given in Table 12.5.1 before any correction factors for ambient temperature or adjustment factors for the number of current-carrying conductors have been applied.

**Table 12.5.1: Conductor Ampacity Based on Copper Conductors with 60°C (140°F), 75°C (167°F), and 90°C (194°F) Insulation in an Ambient Temperature of 30°C (86°F)**

Conductor Size (AWG)	Ampacity		
	60 °C (140 °F)	75 °C (167 °F)	90 °C (194 °F)
30	—	0.5	0.5
28	—	0.8	0.8
26	—	1	1
24	2	2	2
22	3	3	3
20	5	5	5
18	7	7	14
16	10	10	18
14	20	20	25
12	25	25	30
10	30	35	40
8	40	50	55
6	55	65	75
4	70	85	95
3	85	100	110
2	95	115	130
1	110	130	150
1/0	125	150	170
2/0	145	175	195
3/0	165	200	225
4/0	195	230	260
250	215	255	290
300	240	285	320
350	260	310	350
400	280	335	380
500	320	380	430
600	355	420	475
700	385	460	520
750	400	475	535
800	410	490	555
900	435	520	585
1000	455	545	615

Notes: (1) Wire types listed in Table 12.3.1 of *NFPA 79 (2015)* shall be permitted to be used at the ampacities listed in this table.  
 (2) The sources for the ampacities in this table are Table 310.15(B)(16) of *NFPA 70*.

## Correction Factors

**Table 12.5.5(a) Ambient Temperature Correction Factors**

For ambient temperatures other than 30 °C (86 °F), multiply the allowable ampacity by the appropriate factor shown below.

Ambient Temperature (°C)	Correction Factor		
	60 °C	75 °C	90 °C
21-25	1.08	1.05	1.04
26-30	1.00	1.00	1
31-35	0.91	0.94	0.96
36-40	0.82	0.88	0.91
41-45	0.71	0.82	0.87
46-50	0.58	0.75	0.82
51-55	0.41	0.67	0.76
56-60	—	0.58	0.71
61-70	—	0.33	0.58
71-80	—	—	0.41

**Table 12.5.5(b) Adjustment Factors for More Than Three Current-Carrying Conductors in a Raceway or Cable**

Number of Current-Carrying Conductors	Percent of Values in Table 12.5.5(a) as Adjusted for Ambient Temperature if Necessary
4-6	80
7-9	70
10-20	50
21-30	45
31-40	40
41 and above	35

### Example:

Application with a Lutze DRIVEFLEX® XLPE (C) Servo I PVC, Shielded with control pair and an ambient temperature of 43 °C and a required ampacity of 34 Ampere.

- Factor ambient temperature: 0.87
- Percentage factor current carrying conductors: 80

55 A x 0.87 x 0.8 = 38 A > 34 A  
 Our recommendation is a AWG8 + 1 TSP AWG14,  
 Item no. **A2170804**

**Note:** The given values are reference numbers to calculate the required cable sizes. LUTZE Inc. is not responsible for the conformity of the values provided by the NEC.



# Ampacity per National Electric Code (USA)

Calculation of the max. ampacity (Based on „NEC 2017 Edition“)

**Allowable Ampacities of Insulated Conductors Rated 0 Through 2000 Volts, 60°C - 90°C (140°F - 194°F), Not More Than Three Current Carrying Conductors in Raceway, Cable or Earth (Directly Buried), Based on Ambient Temperature of 30°C (86°F)\* (Based on Table 310.15(B)(16))**

	Temperature Rating of Conductor		
	60 °C (140 °F)	75 °C (167 °F)	90 °C (194 °F)
	Types TW, UF	Types RHW, THHW, THW, THWN, XHHW, USE, ZW	Types TBS, SA, SIS, FEP, FEPB, MI, RHH, RHW-2, THHN, THHW, THW-2, THWN-2, USE-2, XHH, XHHW, XHHW-2, ZW-2
Copper size AWG or kcmil			
18**	–	–	14
16**	–	–	18
14**	15	20	25
12**	20	25	30
10**	30	35	40
8	40	50	55
6	55	65	75
4	70	85	95
3	5	100	115
2	95	115	130
1	110	130	145
1/0	125	150	170
2/0	145	175	195
3/0	165	200	225
4/0	195	230	260
250	215	255	290
350	260	310	350
500	320	380	430
750	400	475	535

\* Refer to 310.15(B)(2) for the ampacity correction factors where the ambient temperature is other than 30°C (86°F)

\*\* Refer to 240.4(D) for conductor overcurrent protection limitations

## Correction Factors

1. Ambient temperature (Based on Table 310.15(B)(2))

For ambient temperatures other than 30 °C (86 °F),

multiply the allowable ampacities shown above by the appropriate factor shown below.

Ambient temp. °C	60 °C (140 °F)	75 °C (167 °F)	90 °C (194 °F)
21-25 (70-77 °F)	1.08	1.05	1.04
26-30 (78-86 °F)	1	1	1
31-35 (87-95 °F)	0.91	0.94	0.96
36-40 (96-104 °F)	0.82	0.88	0.91
41-45 (105-113 °F)	0.71	0.82	0.87
46-50 (114-122 °F)	0.58	0.75	0.82
51-55 (123-131 °F)	0.41	0.67	0.76
56-60 (132-140 °F)	–	0.58	0.71
61-65 (141-149 °F)	–	0.47	0.65
66-70 (150-158 °F)	–	0.33	0.58

2. Number of current carrying conductors (Based on Table 310.15(B)(3)A)

Adjustment Factors for more than three current carrying conductors in Raceway or cable.

Number of Current-Carrying Conductors	Percent of Values in Tables 310.15(B) through 310.15(B)(19) as Adjusted for Ambient Temperature if Necessary
1-3	100
4-6	80
7-9	70
10-20	50
21-30	45
31-40	40
40 and more	35

Number of conductors Is the total number of conductors in the raceway or cable adjusted in accordance with 310.15(B)(5) and (6)

## Example:

Application with a Lutze DRIVEFLEX® XLPE (C) Servo I PVC, Shielded with control pair and an ambient temperature of 43 °C and a required ampacity of 34 Ampere.

1. Factor ambient temperature:

0.87

2. Percentage factor current carrying conductors:

80

55 A x 0.87 x 0.8 = 38 A > 34 A

Our recommendation is a AWG8 + 1 TSP AWG14, Item no. **A2170804**

**Note:** The given values are reference numbers to calculate the required cable sizes. LUTZE Inc. is not responsible for the conformity of the values provided by the NEC.

# LUTZE Technical Overview

## Simplified Motor, VFD and Servo Cable Selection by Horsepower (HP)

Part#	Amps	AWG (POWER)	230V-3 Ø	460V-3 Ø	575V-3 Ø
A2161604	4C	18	16 AWG	N/A	N/A
A2161404	4C	25	14 AWG	5 HP	10 HP
A2161204	4C	30	12 AWG	7.5 HP	15 HP
A2161004	4C	40	10 AWG	10 HP	20 HP
A2160804	4C	55	8 AWG	15 HP	30 HP
A2160604	4C			20 HP	40 HP
A2190603	3C	75	6 AWG	30 HP	50 HP
A2200603	3C			40 HP	60 HP
A2160404	4C			50 HP	75 HP
A2190403	3C	95	4 AWG	60 HP	100 HP
A2200403	3C			75 HP	125 HP
A2160204	4C			100 HP	150 HP
A2190203	3C	130	2 AWG	125 HP	200 HP
A2200203	3C			150 HP	250 HP
A2190103	3C	145	1 AWG	200 HP	300 HP
A2200103	3C			250 HP	350 HP
A2191/003	3C	170	1/0		
A2201/003	3C				
A2192/003	3C	195	2/0		
A2202/003	3C				
A2193/003	3C	225	3/0		
A2203/003	3C				
A2194/003	3C	260	4/0		
A2204/003	3C				
A22025003	3C	290	250 kcmil		
A22035003	3C	350	350 kcmil		
A22050003	3C	430	500 kcmil		

Number of current carrying conductors is three (3) + green/yellow ground(s)

Part#	Amps	AWG (POWER)	230V-3Ø	460V-3 Ø	575V-3 Ø
A2171604	4C+1TSP	14	16 AWG	N/A	N/A
A2171404	4C+1TSP	20	14 AWG	5 HP	10 HP
A2171204	4C+1TSP	24	12 AWG	5 HP	10 HP
A2171004	4C+1TSP	32	10 AWG	7.5 HP	15 HP
A2170804	4C+1TSP	44	8 AWG	10 HP	20 HP
A2170604	4C+1TSP	60	6 AWG	15 HP	30 HP
A2170404	4C+1TSP	76	4 AWG	20 HP	40 HP
A2170204	4C+1TSP	104	2 AWG	30 HP	60 HP

Number of current carrying conductors is five (5) + 1 green/yellow ground

Part#	Amps	AWG (POWER)	230V-3Ø	460V-3 Ø	575V-3 Ø
A2181604	4C+2TSP	12.5	16 AWG	N/A	N/A
A2181404	4C+2TSP	17.5	14 AWG	3 HP	10 HP
A2181204	4C+2TSP	21	12 AWG	5 HP	10 HP
A2181004	4C+2TSP	28	10 AWG	7.5 HP	20 HP
A2180804	4C+2TSP	38.5	8 AWG	10 HP	25 HP

Number of current carrying conductors is seven (7) + 1 green/yellow ground

### Notes:

Type of Motor is design B  
 Class of Service is continuous  
 Duty-Cycle Service is continuous  
 Conductor is copper 90°C  
 Ambient temperature is 26-30°C  
 Values are based on 2017 NEC 430.250 multiplied x 1.25  
 Ampacities are based on 2017 NEC 310.15 (B)(16) 90°  
 Cables with Signal pair(s) have been de-rated in accordance to 2017 NEC 310.15(B)(3)(a)

\*All values given are calculated based on 2017 NEC. For actual amperage consult your Motor/Drive manual and your local code restrictions. This guideline is simplified in order to select cable sizes. This document has no legal meaning, the interpretation of the NEC code has to be verified by the Authority Having Jurisdiction (AHJ).

# LUTZE Technical Overview

## Conductor Stranding according to DIN VDE 0295/IEC 60228

Cross section mm	Fine stranded conductor class 5 per VDE 0295	Superfine stranded conductor class 6 per VDE 0295
0.14		18x0.10
0.25	14x0.15	32x0.10
0.34	19x0.15	42x0.10
0.38	12x0.20	21x0.15
0.50	16x0.20	28x0.15
0.75	24x0.20	42x0.15
1.00	32x0.20	56x0.15
1.50	30x0.25	84x0.15
2.50	50x0.25	140x0.15
4	56x0.30	224x0.15
6	84x0.30	192x0.20
10	80x0.40	320x0.20
16	128x0.40	512x0.20
25	200x0.40	800x0.20
35	280x0.40	1120x0.20
50	400x0.40	705x0.30
70	356x0.50	990x0.30
95	485x0.50	1340x0.30
120	614x0.50	1690x0.30
150	765x0.50	2123x0.30
185	944x0.50	1470x0.40
240	1225x0.50	1905x0.40
300	1530x0.50	2385x0.40

The number of strands is non-binding and may vary slightly to meet specified wire resistance. The VDE 0296 determines only the maximum diameter of the single wire that is required for compliance with the maximum wire resistance at 20°C.

## Conductor Stranding to ASTM B174 (172) Comparison Class M, K, B and Metric conversion

Size AWG	Size Metric	Class M Stranding AWG 34	Class K Stranding AWG 30	Class B Stranding
20	≈ 0.52	26	10	7
18	≈ 0.82	41	16	7
16	≈ 1.31	65	26	7
14	≈ 2.08	104	41	7
12	≈ 3.31	168	65	7
10	≈ 5.26	259	104	7
9	≈ 6.32	336	133	7
8	≈ 8.39	420	168	7
7	≈ 10.55	532	210	7
6	≈ 13.29	665	266	7
5	≈ 16.77	836	336	7
4	≈ 21.15	1,064	420	7
3	≈ 26.69	1,323	532	7
2	≈ 33.62	1,666	665	7
1	≈ 42.41	2,107	836	19
1/0	≈ 53.5	2,646	1,064	19
2/0	≈ 67.4	3,325	1,323	19
3/0	≈ 85.0	4,265	1,666	19
4/0	≈ 107.0	5,320	2,107	19

# LUTZE Technical Overview

## Conductor Marking According to DIN 47100

No. Base/ring colors	No. Base/ring colors	No. Base/ring colors	No. Base/ring colors
1 white WH	16 yellow/brown	31 green/blue	46 brown
2 brown BN	17 white/grey	32 yellow/blue	47 green
3 green GN	18 grey/brown	33 green/red	48 yellow
4 yellow YE	19 white/pink	34 yellow/red	49 grey
5 grey GY	20 pink/brown	35 green/black	50 pink
6 pink PK	21 white/blue	36 yellow/black	51 blue
7 blue BU	22 brown/blue	37 grey/blue	52 red
8 red RD	23 white/red	38 pink/blue	53 black
9 black BK	24 brown/red	39 grey/red	54 violet
10 violet VT	25 white/black	40 pink/red	55 grey/pink
11 grey/pink	26 brown/black	41 grey/black	56 red/blue
12 red/blue	27 grey/green	42 pink/black	57 white/green
13 white/green	28 yellow/grey	43 blue/black	58 brown/green
14 brown/green	29 pink/green	44 red/black	59 white/yellow
15 white/yellow	30 yellow/pink	45 white	60 yellow/brown

## Conductor Marking According to DIN 47100 for Twisted Pairs (TP)

Pair No. Conductor A & B	Pair No. Conductor A/B	Pair No. Conductor A/B	Pair No. Conductor A/B
1 white & brown	4 blue & red	7 white/green & brown/green	10 white/pink & pink/brown
2 green & yellow	5 black & violet	8 white/yellow & yellow/brown	11 white/blue & brown/blue
3 grey & pink	6 grey/pink & red/blue	9 white/grey & grey/brown	12 white/red & brown/red

## Color Chart for Hook Up Wire

Color	Abbreviation	LÜTZE Color No.	RAL No.
Green/yellow	GN/YE	00	6018/1021
Black	BK	01	9005
Blue	BU	02	5015
Brown	BN	03	8003
Red	RD	04	3000
White	WH	05	9010
Gray	GY	06	7001
Purple (violet)	VT	07	4001
Pink	PK	08	3015
Orange	OG	09	2003
Yellow	YE	10	1021
Green	GN	11	6018
Dark blue	DBU	14	5010
Blue/white	BU/WH	15	5015/9010
White/blue	WH/BU	44	9010/5015
Red/White	RD/WH	45	3000/9010
Teal			5021

# LUTZE Technical Overview

## Conductor Marking for LUTZE Electronic Cables

### Electronic PLTC A313, A303

#### AWG 22

1-	Black
2-	Brown
3-	Red
4-	Orange
5-	Yellow
6-	Green
7-	Blue
8-	Purple
9-	Gray
10-	White
11-	White      Black
12-	White      Brown
13-	White      Red
14-	White      Orange
15-	White      Yellow
16-	White      Green
17-	White      Blue
18-	White      Purple
19-	White      Gray
20-	White      Black      Brown
21-	White      Black      Red
22-	White      Black      Orange
23-	White      Black      Yellow
24-	White      Black      Green
25-	White      Black      Blue

#### AWG 20, 18 and 16

1-	Black
2-	Red
3-	White
4-	Green
5-	Orange
6-	Blue
7-	Brown
8-	Yellow
9-	Purple
10-	Gray
11-	Pink
12-	Tan
13-	Red      Green
14-	Red      Yellow
15-	Red      Black
16-	White      Black
17-	White      Red
18-	White      Green
19-	White      Yellow
20-	White      Blue
21-	White      Brown
22-	White      Orange
23-	White      Gray
24-	White      Purple
25-	White      Black      Red

### Electronic TP PLTC A314

#### AWG 22

1-	White      Black
2-	White      Brown
3-	White      Red
4-	White      Orange
5-	White      Yellow
6-	White      Green
7-	White      Blue
8-	White      Purple

#### AWG 20, 18 and 16

1-	Black      Red
2-	Black      White
3-	Black      Green
4-	Black      Blue
5-	Black      Brown
6-	Black      Yellow
7-	Black      Orange
8-	Red      Green



# LUTZE Technical Overview

## Chemical Resistance of PVC, TPE and PUR Cable Jackets

Inorganic	Concentration	PVC	TPE	PUR
Alum	c.s.	+	+	
Aluminum salts	ec.	+	+	+
Ammonia, a	10 %	+	+	+
Ammonium acetate, a	ec.	+	+	
Ammonium carbonate, a	ec.	+	+	-
Ammonium chloride, a	ec.	+	+	+
Barium salts	ec.	+	+	+
Boric acid	100 %	+	+	O
Calcium chloride, a	c.s.	+	+	O
Calcium chloride, a	10 % and 40 %			+
Calcium nitrate, a	c.s.	+	+	
Chrome salts, a	c.s.	+	+	+
Potassium carbonate, a (potash)		+	+	
Potassium chlorate, a	c.s.	+	+	
Potassium chloride, a	c.s.	+	+	O
Calcium dichromate, a		+	+	
Calcium iodide, a		+	+	
Calcium nitrate, a	c.s.	+	+	+
Potassium permanganate, a		O	O	-
Potassium sulfate, a		+	+	+
Copper salts, a	c.s.	+	+	+
Magnesium salts, a	c.s.	+	+	O
Sodium carbonate, a (natron)		+	+	O
Sodium bisulfate, a		+	+	
Sodium chloride, a (common salt)		+	+	+
Sodium thiosulfate, a (fixing salt)		+	+	O
Nickel salts, a	c.s.	+	+	+
Phosphoric acid	50 %	+	+	-
Mercury	100 %	+	+	+
Mercury salts, a	c.s.	+	+	+
Nitric acid	30 %	-	-	-
Hydrochloric acid	concentrated	-	-	-
Sulfur	100 %	+	+	+
Sulfur dioxide	gaseous	+	+	O
Carbon disulfide		-	-	-
Hydrogen sulfide		+	+	-
Sea water		+	+	+
Silver salts, a		+	+	+
Hydrogen peroxide, a	3 %	+	+	+
Zinc salts, a		+	+	-
Tin (II) chloride		+	+	

Organic	Concentration	PVC	TPE	PUR
Ethyl alcohol	100 %	-	-	-
Formic acid	30 %	-	-	-
Benzine/Benzene		-	O	+
Succinic acid, a	c.s.	+	+	-
Acetic acid	20 %	O	O	O
Hydraulic oil		-	*	O*
Isopropyl alcohol	100 %	-	-	O
Kerosene			O	O
Machine oil		O*	O*	+
Methyl alcohol, a	100 %	O	O	O
Mineral oil, depending on type (ASTM)			*	*
Oxalic acid, a	c.s.	+	+	
Paraffin oil			+	+
Plant oils and greases		O/+*	+	+
Cutting oil		O*	O/+*	+
Tartaric acids, a		+	+	
Citric acid		+	+	

**Legend:** ec. = each concentration  
c.s. = cold saturated  
a = aqueous  
\* = depending on the additive in oil results may vary greatly  
+ = resistant  
O = conditionally resistant  
- = unstable

**Disclaimer:** The information is to be used ONLY as a guide in selecting equipment for appropriate chemical compatibility. Before permanent installation, test the equipment with the chemicals and under the specific conditions of your application. LUTZE Inc. makes no guarantee or representation as to the completeness or accuracy thereof, and disclaims all liability for any loss or damage resulting from use or reliance upon any information, recommendations or suggestions contained herein.

## Protection Class Designation according to EN 60529

The protection of electrical equipment through corresponding enclosure is specified with code letters and code numbers. This protection class designation consists of the letters "IP" and two code numbers from 0 to 8. The first code number stands for the protection against contact and foreign substances, the second number specifies the degree of protection against water. The higher the respective code number is, the higher the offered protection. The protection class for each product is specified in the respective technical information.

### For example:

<b>IP 65</b>	<b>Code letter IP</b>	<b>IP</b>	
	<b>First code number</b>	<b>6</b>	<b>corresponds to: Protection against entrance of dust</b>
	<b>Second code number</b>	<b>5</b>	<b>corresponds to: Protection against sprayed water</b>

### For protection against contact and foreign substances

First code number	Protection scope designation	Explanation
0	No protection	No special protection of persons from accidental contact with standing or moving parts under voltage. No protection of the equipment against entry of solid foreign substances.
1	1 Protection against foreign substances > 50 mm	Protection against accidental contact of large area surfaces of standing and internally moving parts under voltage, e.g. with the hand, but no protection against intentional access to these parts. Protection against entry of solid foreign substances with a diameter larger than 50 mm.
2	Protection against foreign substances > 12 mm voltage	Protection against contact by the fingers of standing or internally moving parts under voltage. Protection against entry of solid foreign substances with a diameter larger than 12 mm.
3	Protection against foreign substances > 2.5 mm tools	Protection against contact of standing or internally moving parts under voltage with, wires or similar of a thickness larger than 2.5 mm. Protection against entry of solid foreign substances with a diameter larger than 2.5 mm.
4	Protection against foreign substances > 1 mm	Protection against contact of standing or internally moving parts under voltage with tools, wires or similar of a thickness larger than 1 mm. Protection against entry of solid foreign substances with a diameter larger than 1 mm.
5	Protection against dust accumulation	Full protection against contact of standing or internally moving parts under voltage moving parts under voltage. Protection against dust accumulation. The entry of dust is not fully prevented but the dust may not enter in such quantities that the functioning is impaired.
6	Protection against dust accumulation	Full protection against contact of standing or internally moving parts under voltage moving parts under voltage. Protection against entry of dust.

### For water protection

Second code number	Protection scope designation	Explanation
0	No protection	No special protection.
1	Protection against vertically falling dripping water	Water drops that fall vertically may not have any damaging effect.
2	Protection against dripping water falling at an angle	Water drops that fall at an arbitrary angle of up to 15° to vertical may not have any damaging effect.
3	Protection against sprayed water	Water that falls in an arbitrary angle up to 60° to vertical may not have a damaging effect.
4	Protection against splashed water	Water that is splashed from all directions against the equipment may not have a damaging effect.
5	Protection against water projected from a nozzle	Water projected from a nozzle that is aimed at the equipment from all directions may not have any damaging effect.
6	Protection against flooding	Water may not enter into the equipment in damaging amounts during temporary flooding (e.g. by heavy seas)
7	Protection against immersion	Water may not enter in damaging amounts if the equipment is immersed in water for the defined pressure and time conditions.
8	Protection against submersion	Water may not enter in damaging amounts if the equipment is submerged in water for the defined pressure and indefinite amount of time.

# LUTZE Technical Overview

## Thread Tables for LUTZE Cable Fittings - NPT, PG, Metric

NPT	Pitch mm	Outside Diameter mm	Number of Threads per Unit Length	Clearance Hole mm
NPT 3/8"	1.411	17.055	18	17.0
NPT 1/2"	1.814	21.223	14	22
NPT 3/4"	1.814	26.568	14	29
NPT 1"	2.209	33.227	11.5	33.5
NPT 2"	2.209	60.091	11.5	60.8
NPT 2 1/2"	3.175	72.699	8	73.5
NPT 3"	3.175	88.609	8	89.4

PG to DIN 40430	Pitch mm	Outside Diameter mm	Core Diameter mm	Clearance Hole mm
PG7	1.270	12.5	11.28	12.7
PG9	1.410	15.2	13.86	15.4
PG11	1.410	18.6	17.26	18.8
PG13	1.410	20.4	19.06	20.7
PG16	1.410	22.5	21.16	22.8
PG21	1.588	28.3	26.78	28.6
PG29	1.588	37.0	35.48	37.4
PG36	1.588	47.0	45.48	47.5
PG42	1.588	54.0	52.48	54.5
PG48	1.588	59.3	57.78	59.8

Metric to EN 60423	Pitch mm	Outside Diameter mm	Core Diameter mm	Clearance Hole mm
M12x1.5	1.5	12	10.5	12.2
M16x1.5	1.5	16	14.5	16.2
M20x1.5	1.5	20	18.5	20.2
M25x1.5	1.5	25	23.5	25.2
M32x1.5	1.5	32	30.5	32.2
M40x1.5	1.5	40	38.5	40.2
M50x1.5	1.5	50	48.5	50.2
M63x1.5	1.5	63	61.5	63.2
M75x1.5	1.5	75	73.5	75.5
M90x1.5	1.5	90	80	90.2

# LUTZE Technical Overview

## Torque Recommendations for LUTZE Cable Fittings - Plastic and Metal Dome Nuts

Nominal Size	Recommended Torque in Nm	
	Plastic	Metal
NPT 3/8"	2.5	4.5
NPT 1/2"	3.0	5
NPT 3/4"	5.0	7.0
NPT 1"	5.0	7.0
PG7	2.5	6.25
PG9	3.75	6.25
PG11	3.75	6.25
PG13.5	3.75	6.25
PG16	5.0	7.5
PG21	7.5	10.0
PG29	7.5	10.0
PG36	7.5	10.0
PG42	7.5	10.0
PG48	7.5	10.0
M12x1.5	1.0	5
M16x1.5	2.5	5
M20x1.5	4.0	7.5
M25x1.5	6.0	10
M32x1.5	7.0	15
M40x1.5	7.5	18
M50x1.5	8.0	20
M63x1.5	9.0	20

## Torque Recommendations for LUTZE Cable Fittings – EMC2 Style

Nominal Size	Recommended Torque in Nm	
	Body (Dome Nut)	locknut
NPT 3/8"	6.5	-
NPT 1/2"	8.0	-
NPT 3/4"	16.0	-
NPT 1"	22.0	-
M12x1.5	5.5	3
M16x1.5	6.5	4
M20x1.5	8.0	5.5
M25x1.5	16.0	6
M32x1.5	22.0	6
M40x1.5	42.0	12
M50x1.5	42.0	18
M63x1.5	43.0	25

## Torque Recommendations for LUTZE Cable Fittings – CEX Style

Nominal Size	Recommended Torque in Nm			Recommended Torque in Nm locknut
	3 seal rings	2 seal rings	1 seal ring	
NPT 2"	190 ± 3	125 ± 3	140 ± 3	-
NPT 2 1/2"	130 ± 3	125 ± 3	120 ± 3	-
NPT 3"	123 ± 3	115 ± 3	107 ± 3	-
M63x1.5	190 ± 3	125 ± 3	140 ± 3	25 ± 2.5
M75x1.5	130 ± 3	125 ± 3	120 ± 3	30 ± 2.5
M90x1.5	123 ± 3	115 ± 3	107 ± 3	35 ± 2.5

The specified values are recommended for achieving the protection class IP68 at 5 bar. Please choose the suitable torque for the material and cable application. The actual crush resistance of each cable must be considered and you may have to significantly reduce the torque. The values shown are for reference only.

# LUTZE Fittings Selection Chart

Part#	Plastic NPT	Plastic PG	Plastic Metric	Metal NPT	Metal PG	Metal Metric	Part#	Plastic NPT	Plastic PG	Plastic Metric	Metal NPT	Metal PG	Metal Metric
104198	FMNPT12	FPPG16	FPM20	N/A	FMPG16	FMM25 FMM25-C2	111277	N/A	FPPG36	FPM40	N/A	FMPG36	FMM50 FMM50-C2
104265	FPNPT38	FPPG11	FPM16	FMNPT12 FMNPT38-C2	FMPG11	FMM20 FMM16-C2	111278	N/A	FPPG42	FPM50	N/A	FMPG42	N/A FMM50-C2
104275	FPNPT12-R	FPPG13	FPM20-R	FMNPT12 FMNPT12-C2	FMPG13	FMM20 FMM20-C2	111279	FPNPT34	FPPG21	FPM25	FMNPT34 FMNPT34-C2	FMPG21	FMM32 FMM25-C2
104280	FPNPT38	FPPG9	FPM16	FMNPT12 FMNPT38-C2	FMPG9	FMM20 FMM16-C2	111285	FPNPT12	FPPG16	FPM20	FMNPT34	FMPG16	FMM25
104281	FPNPT12	FPPG16	FPM20	N/A	FMPG16	FMM25 FMM25-C2	111288	FPNPT38	FPPG11	FPM16	FMNPT12 FMNPT38-C2	FMPG11	FMM20 FMM16-C2
104287	FPNPT38	FPPG11	FPM16	FMNPT12 FMNPT38-C2	FMPG11	FMM20 FMM16-C2	111289	FPNPT38	FPPG13	FPM16	FMNPT12 FMNPT12-C2	FMPG13	FMM20 FMM20-C2
104289	FPNPT38	FPPG9	FPM16	FMNPT12 FMNPT38-C2	FMPG9	FMM20 FMM16-C2	111290	FPNPT12-R	FPPG13	FPM20-R	FMNPT12 FMNPT12-C2	FMPG13	FMM20 FMM20-C2
104293	FPNPT38	FPPG11	FPM16	FMNPT12 FMNPT38-C2	FMP11	FMM20 FMM16-C2	111291	FPNPT12	FPPG16	FPM20	FMNPT12 FMNPT12-C2	FMPG16	FMM25 FMM25-C2
104301	FPNPT38	FPPG9	FPM16	FMNPT38 FMNPT38-C2	FMPG9	FMM16 FMM16-C2	111292	FPNPT34	FPPG21	FPM25	FMNPT34 FMNPT34-C2	FMPG21	FMM32 FMM25-C2
104302	FPNPT38	FPPG9	FPM16	FMNPT38 FMNPT38-C2	FMPG9	FMM16 FMM16-C2	111293	FPNPT34	FPPG21	FPM25	FMNPT34 FMNPT34-C2	FMPG21	FMM32 FMM25-C2
104303	FPNPT38	FPPG9	FPM16	FMNPT38 FMNPT38-C2	FMPG9	FMM16 FMM16-C2	111294	FPNPT34	FPPG21	FPM25	FMNPT34 FMNPT34-C2	FMPG21	FMM32 FMM25-C2
104307	FPNPT38	FPPG9	FPM16	FMNPT38 FMNPT38-C2	FMPG9	FMM16 FMM16-C2	111295	FPNPT10	FPPG29	FPM32	FMNPT10 FMNPT10-C2	FMPG29	FMM40 FMM40-C2
104310	FPNPT38	FPPG9	FPM16	FMNPT38 FMNPT38-C2	FMPG9	FMM16 FMM16-C2	111296	FPNPT10	FPPG29	FPM32	FMNPT10 FMNPT10-C2	FMPG29	FMM40 FMM40-C2
104331	FPNPT38	FPPG9	FPM16	FMNPT38 FMNPT38-C2	FMPG9	FMM20 FMM16-C2	111337	FPNPT12	FPPG16	FPM20	FMNPT12	FMPG16	FMM25
104335	FPNPT38	FPPG9	FPM16	FMNPT38 FMNPT38-C2	FMPG9	FMM16 FMM16-C2	111370	FPNPT38	FPPG11	FPM16	FMNPT12	FMPG11	FMM20
104336	FPNPT38	FPPG9	FPM16	FMNPT12 FMNPT38-C2	FMPG9	FMM20 FMM16-C2	111371	FPNPT12-R	FPPG13	FPM20-R	FMNPT12	FMPG13	FMM20
104337	FPNPT38	FPPG11	FPM16	FMNPT12 FMNPT38-C2	FMPG11	FMM20 FMM16-C2	111372	FPNPT12	FPPG16	FPM20	FMNPT12	FMPG16	FMM25
104338	FPNPT38	FPPG9	FPM16	FMNPT38 FMNPT38-C2	FMPG9	FMM16 FMM16-C2	111373	FPNPT34	FPPG21	FPM25	FMNPT34	FMPG21	FMM32
104344	FPNPT38	FPPG11	FPM16	FMNPT12 FMNPT38-C2	FMPG11	FMM20 FMM16-C2	111374	FPNPT34	FPPG21	FPM25	FMNPT34	FMPG21	FMM32
104347	FPNPT38	FPPG11	FPM16	FMNPT12 FMNPT38-C2	FMPG11	FMM20 FMM16-C2	111375	FPNPT10	FPPG29	FPM32	FMNPT10	FMPG29	FMM40
104349	FPNPT38	FPPG13	FPM16	FMNPT12 FMNPT12-C2	FMPG13	FMM20 FMM20-C2	111376	FPNPT10	FPPG36	FPM40	FMNPT10	FMPG36	FMM50
104378	FPNPT38	FPPG11	FPM16	FMNPT12 FMNPT38-C2	FMPG11	FMM20 FMM16-C2	111377	N/A	FPPG36	FPM40	N/A	FMPG36	FMM50
104386	FPNPT38-R	FPPG7	FPM12	FMNPT38 FMNPT38-C2	FMPG7	FMM12 FMM12-C2	111378	N/A	FPPG48	FPM63	N/A	FMPG48	FMM63
104387	FPNPT38	FPPG11	FPM16	FMNPT12 FMNPT38-C2	FMPG11	FMM20 FMM16-C2	111388	FPNPT34	FPPG21	FPM25	FMNPT34 FMNPT34-C2	FMPG21	FMM32 FMM32-C2
104388	FPNPT38	FPPG9	FPM16	FMNPT38 FMNPT38-C2	FMPG9	FMM16 FMM16-C2	111412	FPNPT38	FPPG11	FPM16	FMNPT12 FMNPT12-C2	FMPG11	FMM20 FMM16-C2
104389	FPNPT38	FPPG11	FPM16	FMNPT12 FMNPT12-C2	FMPG11	FMM20 FMM16-C2	111420	FPNPT12	FPPG16	FPM20	FMNPT12 FMNPT12-C2	FMPG16	FMM25 FMM20-C2
104390	FPNPT38-R	FPPG7	FPM12	FMNPT38 FMNPT38-C2	FMPG7	FMM12 FMM12-C2	111421	FPNPT12	FPPG16	FPM20	N/A	FMPG16	FMM25 FMM25-C2
104391	FPNPT38	FPPG9	FPM16	FMNPT12 FMNPT38-C2	FMPG9	FMM20 FMM16-C2	111422	FPNPT34	FPPG21	FPM25	FMNPT34 FMNPT34-C2	FMPG21	FMM32 FMM25-C2
110872	FPNPT38	FPPG11	FPM16	FMNPT12	FMPG11	FMM20	111423	FPNPT34	FPPG21	FPM25	FMNPT34 FMNPT34-C2	FMPG21	FMM32 FMM32-C2
110874	FPNPT12-R	FPPG13	FPM20-R	FMNPT12	FMPG13	FMM20	111424	FPNPT10	FPPG29	FPM32	FMNPT10 FMNPT10-C2	FMPG29	FMM40 FMM32-C2
110940	FPNPT38	FPPG11	FPM16	FMNPT12 FMNPT12-C2	FMPG11	FMM20 FMM16-C2	111425	FPNPT10	FPPG29	FPM32	FMNPT10 FMNPT10-C2	FMPG29	FMM40 FMM40-C2
110941	FPNPT38	FPPG11	FPM16	FMNPT12 FMNPT12-C2	FMPG11	FMM20 FMM16-C2	111426	N/A	FPPG36	FPM40	N/A	FMPG36	FMM50 FMM50-C2
111126	FPNPT38	FPPG11	FPM16	FMNPT12	FMPG11	FMM20	111427	N/A	FPPG36	FPM40	N/A	FMPG36	FMM50 FMM50-C2
111127	FPNPT12-R	FPPG13	FPM20-R	FMNPT12	FMPG13	FMM20	111428	N/A	FPPG42	FPM50	N/A	FMPG42	FMM63 FMM50-C2
111128	FPNPT12	FPPG16	FPM20	FMNPT12	FMPG16	FMM25	111429	FPNPT10	FPPG29	FPM32	FMNPT10	FMPG29	FMM40
111129	FPNPT12	FPPG16	FPM20	FMNPT34	FMPG16	FMM25	111430	FPNPT34	FPPG21	FPM25	FMNPT34	FMPG21	FMM32
111130	FPNPT34	FPPG21	FPM25	FMNPT34	FMPG21	FMM32	111452	FPNPT38-R	FPPG7	FPM12	FMNPT38 FMNPT38-C2	FMPG7	FMM12 FMM12-C2
111131	FPNPT34	FPPG21	FPM25	FMNPT34	FMPG21	FMM32	111453	FPNPT38	FPPG9	FPM16	FMNPT38 FMNPT38-C2	FMPG9	FMM16 FMM12-C2
111132	FPNPT10	FPPG29	FPM32	FMNPT10	FMPG29	FMM40	111454	FPNPT38	FPPG9	FPM16	FMNPT38 FMNPT38-C2	FMPG9	FMM16 FMM16-C2
111133	FPNPT10	FPPG29	FPM32	FMNPT10	FMPG29	FMM40	111456	FPNPT38	FPPG13	FPM16	FMNPT12 FMNPT12-C2	FMPG13	FMM20 FMM20-C2
111136	FPNPT38	FPPG9	FPM16	FMNPT12	FMPG9	FMM20	111457	FPNPT12-R	FPPG13	FPM20-R	FMNPT12 FMNPT12-C2	FMPG13	FMM20 FMM20-C2
111197	FPNPT12-R	FPPG13	FPM20-R	FMNPT12	FMPG13	FMM20	111458	FPNPT38	FPPG13	FPM16	FMNPT12 FMNPT12-C2	FMPG13	FMM20 FMM20-C2
111243	FPNPT38	FPPG11	FPM16	FMNPT12	FMPG11	FMM20	111459	FPNPT38	FPPG11	FPM16	FMNPT12 FMNPT12-C2	FMPG11	FMM20 FMM16-C2
111270	FPNPT12	FPPG16	FPM20	N/A	FMPG16	FMM25 FMM25-C2	111460	FPNPT38	FPPG11	FPM16	FMNPT12 FMNPT12-C2	FMPG11	FMM20 FMM16-C2
111271	FPNPT12	FPPG16	FPM20	N/A	FMPG16	FMM25 FMM25-C2	111461	FPNPT12	FPPG13	FPM20	FMNPT12 FMNPT12-C2	FMPG13	FMM20 FMM20-C2
111276	N/A	FPPG36	FPM40	N/A	FMPG36	FMM50 FMM40-C2	111462	FPNPT12	FPPG16	FPM20	N/A	FMPG16	FMM25 FMM25-C2



# LUTZE Fittings Selection Chart

Part#	Plastic NPT	Plastic PG	Plastic Metric	Metal NPT	Metal PG	Metal Metric	Part#	Plastic NPT	Plastic PG	Plastic Metric	Metal NPT	Metal PG	Metal Metric
111463	FPNPT34	FPPG21	FPM25	FMNPT34 FMNPT34-C2	FMPG21	FMM32 FMM25-C2	113361	FPNPT12-R	FPPG13	FPM20-R	FMNPT12 FMNPT12-C2	FMPG13	FMM20 FMM20-C2
111464	FPNPT10-R	FPPG29-R	FPM32-R	FMNPT34 FMNPT34-C2	FMPG21	FMM32 FMM32-C2	113362	FPNPT12-R	FPPG13	FPM20-R	FMNPT12 FMNPT12-C2	FMPG13	FMM20 FMM20-C2
111465	FPNPT10	FPPG29	FPM32	FMNPT10 FMNPT10-C2	FMPG29	FMM40 FMM40-C2	113363	FPNPT12	FPPG16	FPM20	FMNPT12 FMNPT12-C2	FMPG16	FMM25 FMM25-C2
111466	FPNPT10	FPPG36	FPM40	FMNPT10 FMNPT10-C2	FMPG36	FMM50 FMM40-C2	113364	FPNPT34	FPPG21	FPM25	FMNPT34 FMNPT34-C2	FMPG21	FMM32 FMM25-C2
111467	N/A	FPPG36	FPM40	N/A	FMPG36	FMM50 FMM50-C2	113365	FPNPT34	FPPG21	FPM25	FMNPT34 FMNPT34-C2	FMPG21	FMM32 FMM25-C2
111468	N/A	FPPG42	FPM50	N/A	FMPG42	N/A FMM50-C2	113366	FPNPT10-R	FPPG29-R	FPM32-R	FMNPT10 FMNPT10-C2	FMPG29	FMM40 FMM32-C2
111488	FPNPT12-R	FPPG13	FPM16	FMNPT12 FMNPT12-C2	FMPG13	FMM20 FMM20-C2	113400	FPNPT38	FPPG7	FPM12	FMNPT38	FMPG7	FMM16
111489	FPNPT12	FPPG13	FPM20	FMNPT12 FMNPT12-C2	FMPG13	FMM20 FMM20-C2	113401	FPNPT38	FPPG9	FPM16	FMNPT38	FMPG9	FMM20
111495	FPNPT12-R	FPPG13	FPM20-R	FMNPT12 FMNPT12-C2	FMPG13	FMM20 FMM20-C2	113402	FPNPT38	FPPG11	FPM16	FMNPT12	FMPG11	FMM20
111545	FPNPT12	FPPG16	FPM20	FMNPT34	FMPG16	FMM25	113403	FPNPT12-R	FPPG13	FPM20-R	FMNPT12	FMPG13	FMM20
111548	FPNPT10	FPPG36	FPM40	FMNPT10	FMPG36	FMM50	113404	FPNPT12	FPPG16	FPM20	FMNPT12	FMPG16	FMM25
111762	FPNPT10	FPPG29	FPM32	FMNPT10 FMNPT10-C2	FMPG29	FMM40 FMM40-C2	113405	FPNPT34	FPPG21	FPM25	FMNPT34	FMPG21	FMM32
111778	FPNPT12-R	FPPG13	FPM20-R	FMNPT12 FMNPT12-C2	FMPG13	FMM20 FMM20-C2	113406	FPNPT38	FPPG11	FPM16	FMNPT12	FMPG11	FMM20
111779	FPNPT12-R	FPPG13	FPM20-R	FMNPT12 FMNPT12-C2	FMPG13	FMM20 FMM20-C2	113407	FPNPT12-R	FPPG13	FPM20-R	FMNPT12	FMPG13	FMM20
111780	FPNPT38	FPPG11	FPM16	FMNPT12 FMNPT12-C2	FMPG11	FMM20 FMM16-C2	113408	FPNPT12	FPPG16	FPM20	FMNPT12	FMPG16	FMM25
111781	FPNPT38	FPPG11	FPM16	FMNPT12 FMNPT38-C2	FMPG11	FMM20 FMM16-C2	113409	FPNPT12	FPPG16	FPM20	FMNPT34	FMPG16	FMM25
111879	FPNPT38	FPPG9	FPM16	FMNPT12 FMNPT38-C2	FMPG9	FMM20 FMM16-C2	113410	FPNPT34	FPPG21	FPM25	FMNPT34	FMPG21	FMM32
111998	FPNPT10-R	FPPG29-R	FPM32-R	FMNPT10 FMNPT10-C2	FMPG29	FMM40 FMM32-C2	113411	FPNPT10-R	FPPG29-R	FPM32-R	FMNPT10	FMPG29	FMM40
113300	FPNPT38	FPPG9	FPM16	FMNPT38 FMNPT38-C2	FMPG9	FMM16 FMM16-C2	113412	FPNPT38	FPPG11	FPM16	FMNPT12	FMPG11	FMM20
113301	FPNPT38	FPPG11	FPM16	FMNPT12 FMNPT38-C2	FMPG11	FMM20 FMM16-C2	113415	FPNPT12-R	FPPG13	FPM20-R	FMNPT12	FMPG13	FMM20
113302	FPNPT38	FPPG11	FPM16	FMNPT12 FMNPT12-C2	FMPG11	FMM20 FMM16-C2	113416	FPNPT12	FPPG13	FPM20	FMNPT12	FMPG13	FMM20
113303	FPNPT12-R	FPPG13	FPM20-R	FMNPT12 FMNPT12-C2	FMPG13	FMM20 FMM20-C2	113417	FPNPT12	FPPG16	FPM20	N/A	FMPG16	FMM25
113304	FPNPT12	FPPG16	FPM20	FMNPT12 FMNPT12-C2	FMPG16	FMM25 FMM20-C2	113426	FPNPT34	FPPG21	FPM25	FMNPT34	FMPG21	FMM32
113305	FPNPT12	FPPG16	FPM20	FMNPT12 FMNPT12-C2	FMPG16	FMM25 FMM25-C2	113431	FPNPT38-R	FPPG7	FPM12	FMNPT38	FMPG7	FMM12
113312	FPNPT38	FPPG11	FPM16	FMNPT12 FMNPT38-C2	FMPG11	FMM20 FMM16-C2	113433	FPNPT38	FPPG9	FPM16	FMNPT38	FMPG9	FMM16
113313	FPNPT38	FPPG13	FPM16	FMNPT12 FMNPT12-C2	FMPG13	FMM20 FMM20-C2	113438	FPNPT38	FPPG13	FPM16	FMNPT12	FMPG13	FMM20
113314	FPNPT12-R	FPPG13	FPM20-R	FMNPT12 FMNPT12-C2	FMPG13	FMM20 FMM20-C2	113441	FPNPT38-R	FPPG7	FPM12	FMNPT38	FMPG7	FMM12
113315	FPNPT12	FPPG16	FPM20	N/A	FMPG16	FMM25 FMM25-C2	113442	FPNPT38-R	FPPG7	FPM12	FMNPT38	FMPG7	FMM12
113316	FPNPT34	FPPG21	FPM25	FMNPT34 FMNPT34-C2	FMPG21	FMM32 FMM25-C2	113443	FPNPT38	FPPG7	FPM12	FMNPT38	FMPG7	FMM16
113317	FPNPT34	FPPG21	FPM25	FMNPT34 FMNPT34-C2	FMPG21	FMM32 FMM25-C2	113444	FPNPT38	FPPG9	FPM16	FMNPT38	FMPG9	FMM16
113318	FPNPT12-R	FPPG13	FPM20-R	FMNPT12 FMNPT12-C2	FMPG13	FMM20 FMM20-C2	113446	FPNPT38	FPPG11	FPM16	FMNPT12	FMPG11	FMM20
113319	FPNPT12	FPPG16	FPM20	FMNPT12 FMNPT12-C2	FMPG16	FMM25 FMM20-C2	113447	FPNPT12	FPPG16	FPM20	FMNPT12	FMPG16	FMM25
113320	FPNPT12	FPPG16	FPM20	N/A	FMPG16	FMM25 FMM25-C2	113479	FPNPT10-R	FPPG29-R	FPM32-R	FMNPT34	FMPG21	FMM32
113321	FPNPT34	FPPG21	FPM25	FMNPT34 FMNPT34-C2	FMPG21	FMM32 FMM25-C2	113483	FPNPT38	FPPG13	FPM16	FMNPT12	FMPG13	FMM20
113322	FPNPT34	FPPG21	FPM25	FMNPT34 FMNPT34-C2	FMPG21	FMM32 FMM32-C2	113484	FPNPT38	FPPG7	FPM12	FMNPT38	FMPG7	FMM16
113323	FPNPT10	FPPG29	FPM32	FMNPT10 FMNPT10-C2	FMPG29	FMM40 FMM40-C2	113485	FPNPT38	FPPG11	FPM16	FMNPT12	FMPG11	FMM20
113324	FPNPT38	FPPG11	FPM16	FMNPT12 FMNPT12-C2	FMPG11	FMM20 FMM16-C2	113570	FPNPT38	FPPG9	FPM16	FMNPT12	FMPG9	FMM20
113331	FPNPT12-R	FPPG13	FPM20	FMNPT12 FMNPT12-C2	FMPG13	FMM20 FMM20-C2	113571	FPNPT38	FPPG9	FPM16	FMNPT12	FMPG9	FMM20
113332	FPNPT12	FPPG16	FPM20	FMNPT12 FMNPT12-C2	FMPG16	FMM25 FMM25-C2	113572	FPNPT38	FPPG11	FPM16	FMNPT12	FMPG11	FMM20
113339	FPNPT12	FPPG16	FPM20	N/A	FMPG16	FMM25 FMM25-C2	113573	FPNPT38	FPPG11	FPM16	FMNPT12	FMPG11	FMM20
113340	FPNPT34	FPPG21	FPM25	FMNPT34 FMNPT34-C2	FMPG21	FMM32 FMM25-C2	113574	FPNPT12-R	FPPG13	FPM20-R	FMNPT12	FMPG13	FMM20
113341	FPNPT12	FPPG13	FPM20	FMNPT12 FMNPT12-C2	FMPG13	FMM20 FMM20-C2	113575	FPNPT12	FPPG16	FPM20	FMNPT12	FMPG16	FMM25
113342	FPNPT10	FPPG29	FPM32	FMNPT10 FMNPT10-C2	FMPG29	FMM40 FMM32-C2	113576	FPNPT34	FPPG21	FPM25	FMNPT34	FMPG21	FMM32
113344	FPNPT34	FPPG21	FPM25	FMNPT34 FMNPT34-C2	FMPG21	FMM32 FMM32-C2	113577	FPNPT34	FPPG21	FPM25	FMNPT34	FMPG21	FMM32
113347	FPNPT38	FPPG9	FPM16	FMNPT38 FMNPT38-C2	FMPG9	FMM20 FMM16-C2	117028	FPNPT38	FPPG9	FPM16	FMNPT12	FMPG9	FMM20
113360	FPNPT38	FPPG13	FPM16	FMNPT12 FMNPT12-C2	FMPG13	FMM20 FMM20-C2	117029	FPNPT38	FPPG11	FPM16	FMNPT12	FMPG11	FMM20

# LUTZE Fittings Selection Chart

Part#	Plastic NPT	Plastic PG	Plastic Metric	Metal NPT	Metal PG	Metal Metric	Part#	Plastic NPT	Plastic PG	Plastic Metric	Metal NPT	Metal PG	Metal Metric
117039	FPNPT38-R	FPPG7	FPM12	N/A	FMPG7	FMM12	117185	FPNPT12-R	FPPG13	FPM20-R	FMNPT12 FMNPT12-C2	FMPG13	FMM20 FMM20-C2
117040	FPNPT38-R	FPPG7	FPM12	FMNPT38	FMPG7	FMM12	117187	FPNPT12	FPPG16	FPM20	FMNPT12 FMNPT12-C2	FMPG16	FMM25 FMM20-C2
117041	FPNPT38-R	FPPG7	FPM12	FMNPT38	FMPG7	FMM12	117190	FPNPT38	FPPG9	FPM16	FMNPT12 FMNPT38-C2	FMPG9	FMM20 FMM16-C2
117042	FPNPT38-R	FPPG7	FPM12	FMNPT38	FMPG7	FMM12	117191	FPNPT38	FPPG11	FPM16	FMNPT12 FMNPT38-C2	FMPG11	FMM20 FMM16-C2
117043	FPNPT38-R	FPPG7	FPM12	FMNPT38	FMPG7	FMM12	117193	FPNPT12-R	FPPG13	FPM20-R	FMNPT12 FMNPT12-C2	FMPG13	FMM20 FMM20-C2
117044	FPNPT38	FPPG9	FPM16	FMNPT38	FMPG9	FMM16	117194	FPNPT12	FPPG16	FPM20	FMNPT12 FMNPT12-C2	FMPG16	FMM25 FMM20-C2
117046	FPNPT38	FPPG9	FPM16	FMNPT12	FMPG9	FMM20	117196	FPNPT12	FPPG16	FPM20	N/A	FMPG16	FMM25 FMM25-C2
117047	FPNPT38	FPPG11	FPM16	FMNPT12	FMPG11	FMM20	117199	FPNPT38	FPPG11	FPM16	FMNPT12 FMNPT12-C2	FMPG11	FMM20 FMM16-C2
117048	FPNPT38-R	FPPG7	FPM12	FMNPT38	FMPG7	FMM12	117201	FPNPT38	FPPG11	FPM16	FMNPT12 FMNPT12-C2	FMPG11	FMM20 FMM16-C2
117049	FPNPT38-R	FPPG7	FPM12	FMNPT38	FMPG7	FMM12	117202	FPNPT12-R	FPPG13	FPM20-R	FMNPT12 FMNPT12-C2	FMPG13	FMM20 FMM20-C2
117050	FPNPT38-R	FPPG7	FPM12	FMNPT38	FMPG7	FMM12	117240	FPNPT38-R	FPPG7	FPM12	FMNPT38	FMPG7	FMM12
117051	FPNPT38-R	FPPG7	FPM12	FMNPT38	FMPG7	FMM12	117241	FPNPT38-R	FPPG7	FPM12	FMNPT38	FMPG7	FMM12
117052	FPNPT38	FPPG7	FPM12	FMNPT38	FMPG7	FMM16	117242	FPNPT38	FPPG7	FPM12	FMNPT38	FMPG7	FMM16
117053	FPNPT38	FPPG9	FPM16	FMNPT38	FMPG9	FMM16	117243	FPNPT38-R	FPPG7	FPM12	FMNPT38	FMPG7	FMM12
117055	FPNPT38	FPPG11	FPM16	FMNPT12	FMPG11	FMM20	117244	FPNPT38-R	FPPG7	FPM12	FMNPT38	FMPG7	FMM12
117056	FPNPT12-R	FPPG13	FPM20-R	FMNPT12	FMPG13	FMM20	117245	FPNPT38-R	FPPG7	FPM12	FMNPT38	FMPG7	FMM12
117099	FPNPT38-R	FPPG7	FPM12	FMNPT38	FMPG7	FMM12 FMM12-C2	117246	FPNPT38-R	FPPG7	FPM12	FMNPT38	FMPG7	FMM12
117100	FPNPT38-R	FPPG7	FPM12	FMNPT38	FMPG7	FMM12 FMM12-C2	117250	FPNPT38-R	FPPG7	FPM12	FMNPT38	FMPG7	FMM12 FMM12-C2
117101	FPNPT38-R	FPPG7	FPM12	FMNPT38	FMPG7	FMM12 FMM12-C2	117251	FPNPT38-R	FPPG7	FPM12	FMNPT38	FMPG7	FMM12 FMM12-C2
117102	FPNPT38-R	FPPG7	FPM12	FMNPT38 FMNPT38-C2	FMPG7	FMM12 FMM12-C2	117252	FPNPT38	FPPG9	FPM16	FMNPT38 FMNPT38-C2	FMPG9	FMM16 FMM16-C2
117103	FPNPT38	FPPG7	FPM12	FMNPT38 FMNPT38-C2	FMPG7	FMM16 FMM16-C2	117253	FPNPT38-R	FPPG7	FPM12	FMNPT38	FMPG7	FMM12 FMM12-C2
117104	FPNPT38	FPPG9	FPM16	FMNPT38 FMNPT38-C2	FMPG9	FMM16 FMM16-C2	117254	FPNPT38-R	FPPG7	FPM12	FMNPT38 FMNPT38-C2	FMPG7	FMM12 FMM12-C2
117106	FPNPT38	FPPG11	FPM16	FMNPT12 FMNPT38-C2	FMPG11	FMM20 FMM16-C2	117255	FPNPT38-R	FPPG7	FPM12	FMNPT38 FMNPT38-C2	FMPG7	FMM12 FMM12-C2
117107	FPNPT38	FPPG13	FPM16	FMNPT12 FMNPT12-C2	FMPG13	FMM20 FMM20-C2	117303	FPNPT38	FPPG11	FPM16	FMNPT12 FMNPT12-C2	FMPG11	FMM20 FMM16-C2
117108	FPNPT38-R	FPPG7	FPM12	FMNPT38	FMPG7	FMM12 FMM12-C2	108349A	FPNPT38	FPPG7	FPM12	FMNPT38	FMPG7	FMM16
117109	FPNPT38-R	FPPG7	FPM12	FMNPT38	FMPG7	FMM12 FMM12-C2	108350A	FPNPT38	FPPG9	FPM12	FMNPT38	FMPG9	FMM16
117110	FPNPT38-R	FPPG7	FPM12	FMNPT38 FMNPT38-C2	FMPG7	FMM12 FMM12-C2	108351A	FPNPT38	FPPG9	FPM16	FMNPT38	FMPG9	FMM16
117111	FPNPT38-R	FPPG7	FPM12	FMNPT38 FMNPT38-C2	FMPG7	FMM12 FMM12-C2	108352A	FPNPT38	FPPG9	FPM16	FMNPT12	FMPG9	FMM20
117112	FPNPT38	FPPG9	FPM16	FMNPT38 FMNPT38-C2	FMPG9	FMM16 FMM16-C2	108353A	FPNPT38	FPPG11	FPM16	FMNPT12	FMPG11	FMM20
117113	FPNPT38	FPPG9	FPM16	FMNPT12 FMNPT38-C2	FMPG9	FMM20 FMM16-C2	108354A	FPNPT12	FPPG13	FPM20	FMNPT12	FMPG13	FMM20
117115	FPNPT38	FPPG11	FPM16	FMNPT12 FMNPT12-C2	FMPG11	FMM20 FMM16-C2	108355A	FPNPT12	FPPG16	FPM20	N/A	FMPG16	FMM25
117116	FPNPT12-R	FPPG13	FPM20-R	FMNPT12 FMNPT12-C2	FMPG13	FMM20 FMM20-C2	108356A	FPNPT34	FPPG21	FPM25	FMNPT34	FMPG21	FMM32
117123	FPNPT38	FPPG11	FPM16	FMNPT12 FMNPT38-C2	FMPG11	FMM20 FMM16-C2	108357A	FPNPT38	FPPG9	FPM16	FMNPT38	FMPG9	FMM16
117124	FPNPT38	FPPG9	FPM16	FMNPT12 FMNPT38-C2	FMPG9	FMM20 FMM16-C2	108358A	FPNPT38	FPPG9	FPM16	FMNPT12	FMPG9	FMM20
117170	FPNPT38	FPPG9	FPM16	FMNPT38 FMNPT38-C2	FMPG9	FMM16 FMM16-C2	108359A	FPNPT38	FPPG11	FPM16	FMNPT12	FMPG11	FMM20
117171	FPNPT38	FPPG9	FPM16	FMNPT38 FMNPT38-C2	FMPG9	FMM16 FMM16-C2	108360A	FPNPT38	FPPG13	FPM16	FMNPT12	FMPG13	FMM20
117172	FPNPT38	FPPG9	FPM16	FMNPT38 FMNPT38-C2	FMPG9	FMM16 FMM16-C2	108361A	FPNPT12	FPPG16	FPM20	FMNPT12	FMPG16	FMM25
117173	FPNPT38	FPPG11	FPM16	FMNPT12 FMNPT38-C2	FMPG11	FMM20 FMM16-C2	108362A	FPNPT34	FPPG21	FPM25	FMNPT34	FMPG21	FMM32
117174	FPNPT38	FPPG13	FPM16	FMNPT12 FMNPT12-C2	FMPG13	FMM20 FMM20-C2	108363A	FPNPT34	FPPG21	FPM25	FMNPT34	FMPG21	FMM32
117175	FPNPT12-R	FPPG13	FPM20	FMNPT12 FMNPT12-C2	FMPG13	FMM20 FMM20-C2	108372A	FPNPT38	FPPG9	FPM16	FMNPT12	FMPG9	FMM20
117176	FPNPT12	FPPG13	FPM20	FMNPT12 FMNPT12-C2	FMPG13	FMM20 FMM20-C2	108373A	FPNPT38	FPPG11	FPM16	FMNPT12	FMPG11	FMM20
117177	FPNPT38	FPPG11	FPM16	FMNPT12 FMNPT12-C2	FMPG11	FMM20 FMM16-C2	108374A	FPNPT38	FPPG11	FPM16	FMNPT12	FMPG11	FMM20
117180	FPNPT38	FPPG9	FPM16	FMNPT38 FMNPT38-C2	FMPG9	FMM16 FMM16-C2	108375A	FPNPT12-R	FPPG13	FPM20-R	FMNPT12	FMPG13	FMM20
117181	FPNPT38	FPPG9	FPM16	FMNPT38 FMNPT38-C2	FMPG9	FMM16 FMM16-C2	108376A	FPNPT34	FPPG21	FPM25	FMNPT34	FMPG21	FMM32
117182	FPNPT38	FPPG9	FPM16	FMNPT12 FMNPT38-C2	FMPG9	FMM20 FMM16-C2	108377A	FPNPT34	FPPG21	FPM25	FMNPT34	FMPG21	FMM32
117184	FPNPT38	FPPG11	FPM16	FMNPT12 FMNPT12-C2	FMPG11	FMM20 FMM16-C2	108378A	FPNPT10-R	FPPG29-R	FPM32-R	FMNPT10	FMPG21	FMM32

# LUTZE Fittings Selection Chart

Part#	Plastic NPT	Plastic PG	Plastic Metric	Metal NPT	Metal PG	Metal Metric	Part#	Plastic NPT	Plastic PG	Plastic Metric	Metal NPT	Metal PG	Metal Metric
108380A	FPNPT38	FPPG11	FPM16	FMNPT12	FMPG11	FMM20	A1382003	FPNPT38	FPPG7	FPM12	FMNPT38	FMPG7	FMM16
108381A	FPNPT12-R	FPPG13	FPM20-R	FMNPT12	FMPG13	FMM20	A1382004	FPNPT38	FPPG9	FPM16	FMNPT38	FMPG9	FMM16
108382A	FPNPT12	FPPG13	FPM20	FMNPT12	FMPG13	FMM20	A1382005	FPNPT38	FPPG9	FPM16	FMNPT38	FMPG9	FMM16
108383A	FPNPT12	FPPG16	FPM20	FMNPT34	FMPG16	FMM25	A1382007	FPNPT38	FPPG11	FPM16	FMNPT12	FMPG11	FMM20
108384A	FPNPT34	FPPG21	FPM25	FMNPT34	FMPG21	FMM32	A1382012	FPNPT12-R	FPPG13	FPM20-R	FMNPT12	FMPG13	FMM20
108385A	FPNPT10	FPPG29	FPM32	FMNPT10	FMPG29	FMM40	A1382018	FPNPT12	FPPG16	FPM20	FMNPT12	FMPG16	FMM25
108386A	FPNPT10	FPPG29	FPM32	FMNPT10	FMPG29	FMM40	A1382025	FPNPT12	FPPG16	FPM20	FMNPT34	FMPG16	FMM25
108389A	FPNPT34	FPPG21	FPM25	FMNPT34	FMPG21	FMM32	A1391204	FPNPT12	FPPG16	FPM20	N/A	FMPG16	FMM25 FMM25-C2
108391A	FPNPT38	FPPG9	FPM16	FMNPT38	FMPG9	FMM16	A1391207	FPNPT34	FPPG21	FPM25	FMNPT34 FMNPT34-C2	FMPG21	FMM32 FMM25-C2
108392A	FPNPT12	FPPG16	FPM20	FMNPT12	FMPG16	FMM25	A1391404	FPNPT12	FPPG16	FPM20	FMNPT12 FMNPT12-C2	FMPG16	FMM25 FMM20-C2
108393A	FPNPT12	FPPG16	FPM20	FMNPT34	FMPG16	FMM25	A1391405	FPNPT12	FPPG16	FPM20	FMNPT12 FMNPT12-C2	FMPG16	FMM25 FMM25-C2
108401A	FPNPT38	FPPG9	FPM16	FMNPT38	FMPG9	FMM16	A1391407	FPNPT34	FPPG21	FPM25	FMNPT34 FMNPT34-C2	FMPG21	FMM32 FMM25-C2
A1060804	FPNPT10	FPPG29	FPM32	FMNPT10 FMNPT10-C2	FMPG29	FMM40 FMM40-C2	A1391603	FPNPT38	FPPG11	FPM16	FMNPT12 FMNPT12-C2	FMPG11	FMM20 FMM16-C2
A1061004	FPNPT34	FPPG21	FPM25	FMNPT34 FMNPT34-C2	FMPG21	FMM32 FMM32-C2	A1391604	FPNPT12-R	FPPG13	FPM20-R	FMNPT12 FMNPT12-C2	FMPG13	FMM20 FMM20-C2
A1061204	FPNPT12	FPPG16	FPM20	FMNPT34 FMNPT34-C2	FMPG16	FMM25 FMM25-C2	A1391605	FPNPT12-R	FPPG13	FPM20-R	FMNPT12 FMNPT12-C2	FMPG13	FMM20 FMM20-C2
A1061404	FPNPT12	FPPG16	FPM20	FMNPT12 FMNPT12-C2	FMPG16	FMM25 FMM25-C2	A1391607	FPNPT12	FPPG16	FPM20	FMNPT12 FMNPT12-C2	FMPG16	FMM25 FMM25-C2
A1061604	FPNPT12	FPPG13	FPM20	FMNPT12 FMNPT12-C2	FMPG13	FMM20 FMM20-C2	A1391612	FPNPT34	FPPG21	FPM25	FMNPT34 FMNPT34-C2	FMPG21	FMM32 FMM25-C2
A1061804	FPNPT12-R	FPPG13	FPM20	FMNPT12 FMNPT12-C2	FMPG13	FMM20 FMM20-C2	A1391618	FPNPT34	FPPG21	FPM25	FMNPT34 FMNPT34-C2	FMPG21	FMM32 FMM32-C2
A1070804	FPNPT10	FPPG36	FPM32	FMNPT10 FMNPT10-C2	FMPG36	FMM50 FMM40-C2	A1391625	FPNPT10	FPPG29	FPM32	FMNPT10 FMNPT10-C2	FMPG29	FMM40 FMM32-C2
A1071004	FPNPT10	FPPG29	FPM32	FMNPT10 FMNPT10-C2	FMPG29	FMM40 FMM32-C2	A1391803	FPNPT38	FPPG11	FPM16	FMNPT12 FMNPT12-C2	FMPG11	FMM20 FMM16-C2
A1071204	FPNPT34	FPPG21	FPM25	FMNPT34 FMNPT34-C2	FMPG21	FMM32 FMM32-C2	A1391804	FPNPT38	FPPG11	FPM16	FMNPT12 FMNPT12-C2	FMPG11	FMM20 FMM16-C2
A1071404	FPNPT34	FPPG21	FPM25	FMNPT34 FMNPT34-C2	FMPG21	FMM32 FMM25-C2	A1391805	FPNPT12-R	FPPG13	FPM20-R	FMNPT12 FMNPT12-C2	FMPG13	FMM20 FMM20-C2
A1071604	FPNPT34	FPPG21	FPM25	FMNPT34 FMNPT34-C2	FMPG21	FMM32 FMM25-C2	A1391807	FPNPT12	FPPG16	FPM20	FMNPT12 FMNPT12-C2	FMPG16	FMM25 FMM20-C2
A1071804	FPNPT12	FPPG16	FPM20	FMNPT34 FMNPT34-C2	FMPG16	FMM25 FMM25-C2	A1391812	FPNPT12	FPPG16	FPM20	FMNPT34 FMNPT34-C2	FMPG16	FMM25 FMM25-C2
A1381204	FPNPT12	FPPG13	FPM20	FMNPT12	FMPG13	FMM20	A1391818	FPNPT34	FPPG21	FPM25	FMNPT34 FMNPT34-C2	FMPG21	FMM32 FMM25-C2
A1381207	FPNPT34	FPPG21	FPM25	FMNPT34	FMPG21	FMM32	A1391825	FPNPT34	FPPG21	FPM25	FMNPT34 FMNPT34-C2	FMPG21	FMM32 FMM32-C2
A1381404	FPNPT38	FPPG13	FPM16	FMNPT12	FMPG13	FMM20	A1391834	FPNPT10	FPPG29	FPM32	FMNPT10 FMNPT10-C2	FMPG29	FMM40 FMM32-C2
A1381405	FPNPT12-R	FPPG13	FPM20-R	FMNPT12	FMPG13	FMM20	A1392003	FPNPT38	FPPG9	FPM16	FMNPT12 FMNPT38-C2	FMPG9	FMM20 FMM16-C2
A1381407	FPNPT12	FPPG16	FPM20	FMNPT12	FMPG16	FMM25	A1392004	FPNPT38	FPPG11	FPM16	FMNPT12 FMNPT38-C2	FMPG11	FMM20 FMM16-C2
A1381603	FPNPT38	FPPG9	FPM16	FMNPT12	FMPG9	FMM20	A1392005	FPNPT38	FPPG11	FPM16	FMNPT12 FMNPT12-C2	FMPG11	FMM20 FMM16-C2
A1381604	FPNPT38	FPPG11	FPM16	FMNPT12	FMPG11	FMM20	A1392007	FPNPT12-R	FPPG13	FPM20-R	FMNPT12 FMNPT12-C2	FMPG13	FMM20 FMM20-C2
A1381605	FPNPT38	FPPG11	FPM16	FMNPT12	FMPG11	FMM20	A1392012	FPNPT12	FPPG16	FPM20	FMNPT12 FMNPT12-C2	FMPG16	FMM25 FMM20-C2
A1381607	FPNPT12-R	FPPG13	FPM20-R	FMNPT12	FMPG13	FMM20	A1392018	FPNPT12	FPPG16	FPM20	FMNPT34 FMNPT34-C2	FMPG16	FMM25 FMM25-C2
A1381612	FPNPT12	FPPG16	FPM20	N/A	FMPG16	FMM25	A1392025	FPNPT34	FPPG21	FPM25	FMNPT34 FMNPT34-C2	FMPG21	FMM32 FMM25-C2
A1381618	FPNPT34	FPPG21	FPM25	FMNPT34	FMPG21	FMM32	A1410001	FPNPT12-R	FPPG13	FPM20-R	FMNPT12 FMNPT12-C2	FMPG13	FMM20 FMM20-C2
A1381625	FPNPT34	FPPG21	FPM25	FMNPT38	FMPG21	FMM32	A1410002	FPNPT12	FPPG16	FPM20	FMNPT12 FMNPT12-C2	FMPG16	FMM25 FMM25-C2
A1381803	FPNPT38	FPPG9	FPM16	FMNPT12	FMPG9	FMM16	A2160204	N/A	FPPG42	FPM50	N/A	FMPG42	FMM63 FMM50-C2
A1381804	FPNPT38	FPPG9	FPM16	FMNPT12	FMPG9	FMM20	A2160404	N/A	FPPG36	FPM40	N/A	FMPG36	FMM50 FMM50-C2
A1381805	FPNPT38	FPPG11	FPM16	FMNPT12	FMPG11	FMM20	A2160604	N/A	FPPG36	FPM40	N/A	FMPG36	FMM50 FMM40-C2
A1381807	FPNPT38	FPPG13	FPM16	FMNPT12	FMPG13	FMM20	A2160804	FPNPT10	FPPG29	FPM32	FMNPT10 FMNPT10-C2	FMPG29	FMM40 FMM40-C2
A1381812	FPNPT12	FPPG16	FPM20	FMNPT12	FMPG16	FMM25	A2161004	FPNPT10-R	FPPG29-R	FPM32-R	FMNPT34 FMNPT34-C2	FMPG21	FMM32 FMM32-C2
A1381818	FPNPT12	FPPG16	FPM20	FMNPT34	FMPG16	FMM25	A2161204	FPNPT34	FPPG21	FPM25	FMNPT34 FMNPT34-C2	FMPG21	FMM32 FMM25-C2
A1381825	FPNPT34	FPPG21	FPM25	FMNPT34	FMPG21	FMM32	A2161404	FPNPT34	FPPG21	FPM25	FMNPT34 FMNPT34-C2	FMPG21	FMM32 FMM25-C2
A1381834	FPNPT10-R	FPPG29-R	FPM32-R	FMNPT34	FMPG21	FMM32	A2161604	FPNPT12	FPPG16	FPM20	N/A	FMPG16	FMM25 FMM25-C2
A1381841	FPNPT10	FPPG29	FPM32	FMNPT10	FMPG29	FMM40	A2170204	N/A	FPPG42	FPM50	N/A	FMPG42	FMM63 FMM50-C2
A1381850	FPNPT10	FPPG29	FPM32	FMNPT10	FMPG29	FMM40	A2170404	N/A	FPPG36	FPM40	N/A	FMPG36	FMM50 FMM50-C2

# LUTZE Fittings Selection Chart

Part#	Plastic NPT	Plastic PG	Plastic Metric	Metal NPT	Metal PG	Metal Metric	Part#	Plastic NPT	Plastic PG	Plastic Metric	Metal NPT	Metal PG	Metal Metric
A2170604	N/A	FPPG36	FPM40	N/A	FMPG36	FMM50 FMM50-C2	A3032202	FPNPT38-R	FPPG7	FPM12	FMNPT38	FMPG7	FMM12
A2170804	N/A	FPPG36	FPM40	N/A	FMPG36	FMM50 FMM40-C2	A3032203	FPNPT38-R	FPPG7	FPM12	FMNPT38	FMPG7	FMM12
A2171004	FPNPT10	FPPG29	FPM32	FMNPT10 FMNPT10-C2	FMPG29	FMM40 FMM40-C2	A3032204	FPNPT38-R	FPPG7	FPM12	FMNPT38	FMPG7	FMM12
A2171204	FPNPT10-R	FPPG29-R	FPM32-R	FMNPT10 FMNPT10-C2	FMPG29	FMM40 FMM32-C2	A3032206	FPNPT38	FPPG7	FPM12	FMNPT38	FMPG7	FMM16
A2171404	FPNPT34	FPPG21	FPM25	FMNPT34 FMNPT34-C2	FMPG21	FMM32 FMM32-C2	A3032208	FPNPT38	FPPG9	FPM12	FMNPT38	FMPG9	FMM16
A2171604	FPNPT34	FPPG21	FPM25	FMNPT34 FMNPT34-C2	FMPG21	FMM32 FMM25-C2	A3032210	FPNPT38	FPPG9	FPM16	FMNPT12	FMPG9	FMM20
A2180804	N/A	FPPG36	FPM40	N/A	FMPG36	FMM50 FMM50-C2	A3032215	FPNPT38	FPPG11	FPM16	FMNPT12	FMPG11	FMM20
A2181004	FPNPT10	FPPG29	FPM32	FMNPT10 FMNPT10-C2	FMPG29	FMM40 FMM40-C2	A3032220	FPNPT38	FPPG13	FPM16	FMNPT12	FMPG13	FMM20
A2181204	FPNPT10	FPPG29	FPM32	FMNPT10 FMNPT10-C2	FMPG29	FMM40 FMM40-C2	A3032225	FPNPT12-R	FPPG13	FPM20-R	FMNPT12	FMPG13	FMM20
A2181404	FPNPT10	FPPG29	FPM32	FMNPT10 FMNPT10-C2	FMPG29	FMM40 FMM32-C2	A3080204	N/A	FPPG42	FPM50	N/A	FMPG42	N/A
A2181604	FPNPT10-R	FPPG29-R	FPM32-R	FMNPT34 FMNPT34-C2	FMPG21	FMM32 FMM32-C2	A3080404	N/A	FPPG36	FPM40	N/A	FMPG36	FMM50
A2200103	N/A	FPPG42	FPM50	N/A	FMPG42	FMM50-C2	A3080604	FPNPT10	FPPG29	FPM32	FMNPT10	FMPG29	FMM40
A2200203	N/A	FPPG36	FPM40	N/A	FMPG36	FMM50 FMM50-C2	A3080804	FPNPT10	FPPG29	FPM32	FMNPT10	FMPG29	FMM40
A2200403	N/A	FPPG36	FPM40	N/A	FMPG36	FMM50 FMM40-C2	A3080805	FPNPT10	FPPG29	FPM32	FMNPT10	FMPG29	FMM40
A2200603	FPNPT10	FPPG29	FPM32	FMNPT10 FMNPT10-C2	FMPG29	FMM40 FMM40-C2	A3081004	FPNPT34	FPPG21	FPM25	FMNPT34	FMPG21	FMM32
A2201/003	N/A	FPPG42	FPM50	FMNPT2-CEX	FMPG42	FMM63 FMM50-C2	A3081005	FPNPT34	FPPG21	FPM25	FMNPT34	FMPG21	FMM32
A2202/003	N/A	FPPG48	FPM63	FMNPT2-CEX	FMPG48	FMM63 FMM63-C2	A3081203	FPNPT12-R	FPPG13	FPM20-R	FMNPT12	FMPG13	FMM20
A22025003	N/A	N/A	N/A	FMNPT12-CEX	N/A	FMM75-CEX	A3081204	FPNPT12	FPPG16	FPM20	FMNPT12	FMPG16	FMM25
A2203/003	N/A	FPPG48	FPM63	FMNPT2-CEX	FMPG48	FMM63 FMM63-C2	A3081205	FPNPT12	FPPG16	FPM20	N/A	FMPG16	FMM25
A22035003	N/A	N/A	N/A	FMNPT12-CEX	N/A	FMM75-CEX	A3081207	FPNPT34	FPPG21	FPM25	FMNPT34	FMPG21	FMM32
A2204/003	N/A	N/A	N/A	FMNPT12-CEX	N/A	FMM75-CEX	A3081403	FPNPT38	FPPG11	FPM16	FMNPT12	FMPG11	FMM20
A22050003	N/A	N/A	N/A	FMNPT3-CEX	N/A	FMM90-CEX	A3081404	FPNPT12-R	FPPG13	FPM20-R	FMNPT12	FMPG13	FMM20
A2441402	FPNPT12-R	FPPG13	FPM20-R	FMNPT12 FMNPT12-C2	FMPG13	FMM20 FMM20-C2	A3081405	FPNPT12-R	FPPG13	FPM20-R	FMNPT12	FMPG13	FMM20
A2441404	FPNPT34	FPPG21	FPM25	FMNPT34 FMNPT34-C2	FMPG21	FMM32 FMM32-C2	A3081407	FPNPT12	FPPG16	FPM20	FMNPT12	FMPG16	FMM25
A2441602	FPNPT38	FPPG13	FPM16	FMNPT12 FMNPT12-C2	FMPG13	FMM20 FMM20-C2	A3081409	FPNPT12	FPPG16	FPM20	FMNPT34	FMPG16	FMM25
A2441604	FPNPT34	FPPG21	FPM25	FMNPT34 FMNPT34-C2	FMPG21	FMM32 FMM25-C2	A3081412	FPNPT34	FPPG21	FPM25	FMNPT34	FMPG21	FMM32
A2441802	FPNPT38	FPPG11	FPM16	FMNPT12 FMNPT12-C2	FMPG11	FMM20 FMM16-C2	A3081418	FPNPT10-R	FPPG29-R	FPM32-R	FMNPT10	FMPG29	FMM40
A2441804	FPNPT34	FPPG21	FPM25	FMNPT34 FMNPT34-C2	FMPG21	FMM32 FMM25-C2	A3081425	FPNPT10	FPPG29	FPM32	FMNPT10	FMPG29	FMM40
A3031802	FPNPT38-R	FPPG7	FPM12	FMNPT38	FMPG7	FMM12	A3081602	FPNPT38	FPPG11	FPM16	FMNPT12	FMPG11	FMM20
A3031803	FPNPT38	FPPG7	FPM12	FMNPT38	FMPG7	FMM16	A3081603	FPNPT38	FPPG11	FPM16	FMNPT12	FMPG11	FMM20
A3031804	FPNPT38	FPPG9	FPM16	FMNPT38	FMPG9	FMM16	A3081604	FPNPT38	FPPG11	FPM16	FMNPT12	FMPG11	FMM20
A3031806	FPNPT38	FPPG9	FPM16	FMNPT12	FMPG9	FMM20	A3081605	FPNPT12-R	FPPG13	FPM20-R	FMNPT12	FMPG13	FMM20
A3031808	FPNPT38	FPPG11	FPM16	FMNPT12	FMPG11	FMM20	A3081607	FPNPT12-R	FPPG13	FPM20-R	FMNPT12	FMPG13	FMM20
A3031810	FPNPT38	FPPG13	FPM16	FMNPT12	FMPG13	FMM20	A3081609	FPNPT12	FPPG16	FPM20	FMNPT12	FMPG16	FMM25
A3031815	FPNPT12	FPPG13	FPM20	FMNPT12	FMPG13	FMM20	A3081612	FPNPT12	FPPG16	FPM20	FMNPT34	FMPG16	FMM25
A3031820	FPNPT12	FPPG16	FPM20	FMNPT12	FMPG16	FMM25	A3081618	FPNPT34	FPPG21	FPM25	FMNPT34	FMPG21	FMM32
A3031825	FPNPT12	FPPG16	FPM20	FMNPT34	FMPG16	FMM25	A3081625	FPNPT10	FPPG29	FPM32	FMNPT10	FMPG29	FMM40
A3032002	FPNPT38-R	FPPG7	FPM12	FMNPT38	FMPG7	FMM12	A3081634	FPNPT10	FPPG29	FPM32	FMNPT10	FMPG29	FMM40
A3032003	FPNPT38-R	FPPG7	FPM12	FMNPT38	FMPG7	FMM12	A3081641	FPNPT10	FPPG36	FPM40	FMNPT10	FMPG36	FMM50
A3032004	FPNPT38	FPPG7	FPM12	FMNPT38	FMPG7	FMM16	A3081802	FPNPT38	FPPG9	FPM16	FMNPT38	FMPG9	FMM20
A3032006	FPNPT38	FPPG9	FPM16	FMNPT38	FMPG9	FMM16	A3081803	FPNPT38	FPPG11	FPM16	FMNPT12	FMPG11	FMM20
A3032008	FPNPT38	FPPG9	FPM16	FMNPT12	FMPG9	FMM20	A3081804	FPNPT38	FPPG11	FPM16	FMNPT12	FMPG11	FMM20
A3032010	FPNPT38	FPPG11	FPM16	FMNPT12	FMPG11	FMM20	A3081805	FPNPT38	FPPG11	FPM16	FMNPT12	FMPG11	FMM20
A3032015	FPNPT38	FPPG13	FPM16	FMNPT12	FMPG13	FMM20	A3081807	FPNPT12-R	FPPG13	FPM20-R	FMNPT12	FMPG13	FMM20
A3032020	FPNPT12	FPPG16	FPM20	N/A	FMPG16	FMM25	A3081809	FPNPT12	FPPG13	FPM20	FMNPT12	FMPG13	FMM20
A3032025	FPNPT34	FPPG21	FPM25	FMNPT34	FMPG21	FMM32	A3081812	FPNPT12	FPPG16	FPM20	N/A	FMPG16	FMM25

# LUTZE Fittings Selection Chart

Part#	Plastic NPT	Plastic PG	Plastic Metric	Metal NPT	Metal PG	Metal Metric	Part#	Plastic NPT	Plastic PG	Plastic Metric	Metal NPT	Metal PG	Metal Metric
A3081818	FPNPT34	FPPG21	FPM25	FMNPT34	FMPG21	FMM32	A3131808	FPNPT38	FPPG11	FPM16	FMNPT12 FMNPT12-C2	FMPG11	FMM20 FMM16-C2
A3081825	FPNPT34	FPPG21	FPM25	FMNPT34	FMPG21	FMM32	A3131810	FPNPT12-R	FPPG13	FPM20-R	FMNPT12 FMNPT12-C2	FMPG13	FMM20 FMM20-C2
A3081834	FPNPT10	FPPG29	FPM32	FMNPT10	FMPG29	FMM40	A3131815	FPNPT12	FPPG16	FPM20	FMNPT12 FMNPT12-C2	FMPG16	FMM25 FMM20-C2
A3081841	FPNPT10	FPPG29	FPM32	FMNPT10	FMPG29	FMM40	A3131820	FPNPT12	FPPG16	FPM20	N/A	FMPG16	FMM25 FMM25-C2
A3081850	FPNPT10	FPPG29	FPM32	FMNPT10	FMPG29	FMM40	A3131825	FPNPT34	FPPG21	FPM25	FMNPT34 FMNPT34-C2	FMPG21	FMM32 FMM25-C2
A3082003	FPNPT38	FPPG9	FPM16	FMNPT38	FMPG9	FMM16	A3132002	FPNPT38	FPPG7	FPM12	FMNPT38 FMNPT38-C2	FMPG7	FMM16 FMM12-C2
A3082004	FPNPT38	FPPG9	FPM16	FMNPT12	FMPG9	FMM20	A3132003	FPNPT38	FPPG7	FPM12	FMNPT38 FMNPT38-C2	FMPG7	FMM16 FMM16-C2
A3082005	FPNPT38	FPPG11	FPM16	FMNPT12	FMPG11	FMM20	A3132004	FPNPT38	FPPG9	FPM16	FMNPT38 FMNPT38-C2	FMPG9	FMM16 FMM16-C2
A3082007	FPNPT38	FPPG11	FPM16	FMNPT12	FMPG11	FMM20	A3132006	FPNPT38	FPPG9	FPM16	FMNPT12 FMNPT38-C2	FMPG9	FMM20 FMM16-C2
A3082012	FPNPT12	FPPG13	FPM20	FMNPT12	FMPG13	FMM25 FMM20-C2	A3132008	FPNPT38	FPPG11	FPM16	FMNPT12 FMNPT38-C2	FMPG11	FMM20 FMM16-C2
A3082018	FPNPT12	FPPG16	FPM20	N/A	FMPG16	FMM25 FMM25-C2	A3132010	FPNPT38	FPPG11	FPM16	FMNPT12 FMNPT12-C2	FMPG11	FMM20 FMM16-C2
A3082025	FPNPT34	FPPG21	FPM25	FMNPT34	FMPG21	FMM32 FMM32-C2	A3132015	FPNPT12-R	FPPG13	FPM20-R	FMNPT12 FMNPT12-C2	FMPG13	FMM20 FMM20-C2
A3091004	FPNPT34	FPPG21	FPM25	FMNPT34 FMNPT34-C2	FMPG21	FMM20 FMM16-C2	A3132020	FPNPT12	FPPG13	FPM20	FMNPT12 FMNPT12-C2	FMPG13	FMM20 FMM20-C2
A3091203	FPNPT12	FPPG13	FPM20	FMNPT12 FMNPT12-C2	FMPG13	FMM20 FMM20-C2	A3132025	FPNPT12	FPPG16	FPM20	N/A	FMPG16	FMM25 FMM25-C2
A3091204	FPNPT12	FPPG16	FPM20	FMNPT12 FMNPT12-C2	FMPG16	FMM20 FMM20-C2	A3132202	FPNPT38-R	FPPG7	FPM12	FMNPT38 FMNPT38-C2	FMPG7	FMM12 FMM12-C2
A3091403	FPNPT12-R	FPPG13	FPM20-R	FMNPT12 FMNPT12-C2	FMPG13	FMM20 FMM20-C2	A3132203	FPNPT38-R	FPPG7	FPM12	FMNPT38 FMNPT38-C2	FMPG7	FMM12 FMM12-C2
A3091404	FPNPT12-R	FPPG13	FPM20-R	FMNPT12 FMNPT12-C2	FMPG13	FMM32 FMM25-C2	A3132204	FPNPT38-R	FPPG7	FPM12	FMNPT38 FMNPT38-C2	FMPG7	FMM16 FMM12-C2
A3091405	FPNPT12	FPPG16	FPM20	FMNPT12 FMNPT12-C2	FMPG16	FMM32 FMM32-C2	A3132206	FPNPT38	FPPG9	FPM16	FMNPT38 FMNPT38-C2	FMPG9	FMM16 FMM16-C2
A3091407	FPNPT12	FPPG16	FPM20	N/A	FMPG16	FMM40 FMM32-C2	A3132208	FPNPT38	FPPG9	FPM16	FMNPT38 FMNPT38-C2	FMPG9	FMM16 FMM16-C2
A3091412	FPNPT34	FPPG21	FPM25	FMNPT34 FMNPT34-C2	FMPG21	FMM20 FMM16-C2	A3132210	FPNPT38	FPPG11	FPM16	FMNPT12 FMNPT38-C2	FMPG11	FMM20 FMM16-C2
A3091603	FPNPT38	FPPG11	FPM16	FMNPT12 FMNPT12-C2	FMPG11	FMM20 FMM20-C2	A3132215	FPNPT38	FPPG11	FPM16	FMNPT12 FMNPT12-C2	FMPG11	FMM20 FMM16-C2
A3091604	FPNPT38	FPPG13	FPM16	FMNPT12 FMNPT12-C2	FMPG13	FMM20 FMM16-C2	A3132220	FPNPT38	FPPG13	FPM16	FMNPT12 FMNPT12-C2	FMPG13	FMM20 FMM20-C2
A3091605	FPNPT12-R	FPPG13	FPM20-R	FMNPT12 FMNPT12-C2	FMPG13	FMM20 FMM20-C2	A3132225	FPNPT12	FPPG13	FPM20	FMNPT12 FMNPT12-C2	FMPG13	FMM20 FMM20-C2
A3091607	FPNPT12	FPPG13	FPM20	FMNPT12 FMNPT12-C2	FMPG13	FMM20 FMM20-C2	A3141802	FPNPT38	FPPG7	FPM12	FMNPT38 FMNPT38-C2	FMPG7	FMM16 FMM16-C2
A3091612	FPNPT34	FPPG21	FPM25	FMNPT34 FMNPT34-C2	FMPG21	FMM25 FMM25-C2	A3141804	FPNPT38	FPPG11	FPM16	FMNPT12 FMNPT12-C2	FMPG11	FMM20 FMM16-C2
A3091618	FPNPT34	FPPG21	FPM25	FMNPT34 FMNPT34-C2	FMPG21	FMM32 FMM25-C2	A3141806	FPNPT38	FPPG11	FPM16	FMNPT12 FMNPT12-C2	FMPG11	FMM20 FMM16-C2
A3091625	FPNPT10	FPPG29	FPM32	FMNPT10 FMNPT10-C2	FMPG29	FMM32 FMM32-C2	A3141808	FPNPT12-R	FPPG13	FPM20-R	FMNPT12 FMNPT12-C2	FMPG13	FMM20 FMM20-C2
A3091802	FPNPT38	FPPG11	FPM16	FMNPT12 FMNPT38-C2	FMPG11	FMM20 FMM16-C2	A3141810	FPNPT12	FPPG13	FPM20	FMNPT12 FMNPT12-C2	FMPG13	FMM20 FMM20-C2
A3091803	FPNPT38	FPPG13	FPM16	FMNPT12 FMNPT12-C2	FMPG13	FMM20 FMM16-C2	A3141812	FPNPT12	FPPG16	FPM20	FMNPT12 FMNPT12-C2	FMPG16	FMM25 FMM25-C2
A3091804	FPNPT38	FPPG11	FPM16	FMNPT12 FMNPT12-C2	FMPG11	FMM20 FMM16-C2	A3141816	FPNPT12	FPPG16	FPM20	N/A	FMPG16	FMM25 FMM25-C2
A3091805	FPNPT38	FPPG13	FPM16	FMNPT12 FMNPT12-C2	FMPG13	FMM20 FMM20-C2	A3142002	FPNPT38	FPPG7	FPM12	FMNPT38 FMNPT38-C2	FMPG7	FMM16 FMM12-C2
A3091807	FPNPT12-R	FPPG13	FPM20-R	FMNPT12 FMNPT12-C2	FMPG13	FMM25 FMM20-C2	A3142004	FPNPT38	FPPG11	FPM16	FMNPT12 FMNPT38-C2	FMPG11	FMM20 FMM16-C2
A3091812	FPNPT12	FPPG16	FPM20	N/A	FMPG16	FMM25 FMM25-C2	A3142006	FPNPT38	FPPG11	FPM16	FMNPT12 FMNPT38-C2	FMPG11	FMM20 FMM16-C2
A3091818	FPNPT34	FPPG21	FPM25	FMNPT34 FMNPT34-C2	FMPG21	FMM32 FMM25-C2	A3142008	FPNPT38	FPPG11	FPM16	FMNPT12 FMNPT12-C2	FMPG11	FMM20 FMM16-C2
A3091825	FPNPT10-R	FPPG29-R	FPM32-R	FMNPT34 FMNPT34-C2	FMPG21	FMM16 FMM16-C2	A3142010	FPNPT38	FPPG13	FPM16	FMNPT12 FMNPT12-C2	FMPG13	FMM20 FMM20-C2
A3092003	FPNPT38	FPPG11	FPM16	FMNPT12 FMNPT38-C2	FMPG11	FMM16 FMM16-C2	A3142012	FPNPT12-R	FPPG13	FPM20	FMNPT12 FMNPT12-C2	FMPG13	FMM20 FMM20-C2
A3092004	FPNPT38	FPPG11	FPM16	FMNPT12 FMNPT38-C2	FMPG11	FMM16 FMM16-C2	A3142016	FPNPT12	FPPG16	FPM20	FMNPT12 FMNPT12-C2	FMPG16	FMM25 FMM20-C2
A3092005	FPNPT38	FPPG11	FPM16	FMNPT12 FMNPT12-C2	FMPG11	FMM20 FMM16-C2	A3142202	FPNPT38-R	FPPG7	FPM12	FMNPT38 FMNPT38-C2	FMPG7	FMM12 FMM12-C2
A3092007	FPNPT38	FPPG13	FPM16	FMNPT12 FMNPT12-C2	FMPG13	FMM20 FMM16-C2	A3142204	FPNPT38	FPPG9	FPM16	FMNPT38 FMNPT38-C2	FMPG9	FMM16 FMM16-C2
A3092012	FPNPT12	FPPG16	FPM20	FMNPT12 FMNPT12-C2	FMPG16	FMM20 FMM20-C2	A3142206	FPNPT38	FPPG9	FPM16	FMNPT38 FMNPT38-C2	FMPG9	FMM16 FMM16-C2
A3092018	FPNPT12	FPPG16	FPM20	FMNPT34 FMNPT34-C2	FMPG16	FMM25 FMM20-C2	A3142208	FPNPT38	FPPG11	FPM16	FMNPT12 FMNPT38-C2	FMPG11	FMM20 FMM16-C2
A3092025	FPNPT34	FPPG21	FPM25	FMNPT34 FMNPT34-C2	FMPG21	FMM25 FMM25-C2	A3142210	FPNPT38	FPPG11	FPM16	FMNPT12 FMNPT12-C2	FMPG11	FMM20 FMM16-C2
A3131802	FPNPT38	FPPG7	FPM12	FMNPT38 FMNPT38-C2	FMPG7	FMM32 FMM25-C2	A3142212	FPNPT38	FPPG13	FPM16	FMNPT12 FMNPT12-C2	FMPG13	FMM20 FMM20-C2
A3131803	FPNPT38	FPPG9	FPM16	FMNPT38 FMNPT38-C2	FMPG9	FMM16 FMM12-C2	A3142216	FPNPT12-R	FPPG13	FPM20-R	FMNPT12 FMNPT12-C2	FMPG13	FMM20 FMM20-C2
A3131804	FPNPT38	FPPG9	FPM16	FMNPT38 FMNPT38-C2	FMPG9	FMM16 FMM16-C2	A3160804	FPNPT10	FPPG29	FPM32	FPNPT10 FMNPT10-C2	FMPG29	FMM40 FMM40-C2
A3131806	FPNPT38	FPPG11	FPM16	FMNPT12 FMNPT38-C2	FMPG11	FMM16 FMM16-C2	A3161004	FPNPT34	FPPG21	FPM25	FMNPT34 FMNPT34-C2	FMPG21	FMM32 FMM32-C2



# LUTZE Fittings Selection Chart

Part#	Plastic NPT	Plastic PG	Plastic Metric	Metal NPT	Metal PG	Metal Metric	Part#	Plastic NPT	Plastic PG	Plastic Metric	Metal NPT	Metal PG	Metal Metric
A3161204	FPNPT12	FPPG16	FPM20	FMNPT34 FMNPT34-C2	FMPG16	FMM25 FMM25-C2	A3251612	FPNPT34	FPPG21	FPM25	FMNPT34	FMPG21	FMM32
A3161404	FPNPT12	FPPG16	FPM20	FMNPT12 FMNPT12-C2	FMPG16	FMM25 FMM25-C2	A3251619	FPNPT34	FPPG21	FPM25	FMNPT34	FMPG21	FMM32
A3161604	FPNPT12-R	FPPG13	FPM20	FMNPT12 FMNPT12-C2	FMPG13	FMM20 FMM20-C2	A3251625	FPNPT10	FPPG29	FPM32	FMNPT10	FMPG29	FMM40
A3170204	N/A	FPPG42	FPM50	N/A	FMPG42	FMM63 FMM50-C2	A3251803	FPNPT38	FPPG11	FPM16	FMNPT12	FMPG11	FMM20
A3170404	N/A	FPPG36	FPM40	N/A	FMPG36	FMM50 FMM50-C2	A3251805	FPNPT38	FPPG11	FPM16	FMNPT12	FMPG11	FMM20
A3170604	FPNPT10	FPPG36	FPM40	FMNPT10 FMNPT10-C2	FMPG36	FMM50 FMM40-C2	A3251807	FPNPT38	FPPG13	FPM16	FMNPT12	FMPG13	FMM20
A3170804	FPNPT10	FPPG29	FPM32	FMNPT10 FMNPT10-C2	FMPG29	FMM40 FMM40-C2	A3251812	FPNPT12	FPPG16	FPM20	N/A	FMPG16	FMM25
A3171004	FPNPT10-R	FPPG29-R	FPM32-R	FMNPT10 FMNPT10-C2	FMPG29	FMM40 FMM32-C2	A3251819	FPNPT34	FPPG21	FPM25	FMNPT34	FMPG21	FMM32
A3171204	FPNPT34	FPPG21	FPM25	FMNPT34 FMNPT34-C2	FMPG21	FMM32 FMM25-C2	A3251825	FPNPT34	FPPG21	FPM25	FMNPT34	FMPG21	FMM32
A3171404	FPNPT12	FPPG16	FPM20	N/A	FMPG16	FMM25 FMM25-C2	A3251837	FPNPT10	FPPG29	FPM32	FMNPT10	FMPG29	FMM40
A3171604	FPNPT12	FPPG16	FPM20	N/A	FMPG16	FMM25 FMM25-C2	A3311004	FPNPT34	FPPG21	FPM25	FMNPT34 FMNPT34-C2	FMPG21	FMM32 FMM25-C2
A3220604	FPNPT10	FPPG29	FPM32	FMNPT10	FMPG29	FMM40	A3311203	FPNPT12-R	FPPG13	FPM20-R	FMNPT12 FMNPT12-C2	FMPG13	FMM20 FMM20-C2
A3220804	FPNPT10	FPPG29	FPM32	FMNPT10	FMPG29	FMM40	A3311204	FPNPT12	FPPG16	FPM20	FMNPT12 FMNPT12-C2	FMPG16	FMM25 FMM20-C2
A3221004	FPNPT34	FPPG21	FPM25	FMNPT34	FMPG21	FMM32	A3311205	FPNPT12	FPPG16	FPM20	N/A	FMPG16	FMM25 FMM25-C2
A3221203	FPNPT12-R	FPPG13	FPM20-R	FMNPT12	FMPG13	FMM20	A3311403	FPNPT38	FPPG13	FPM16	FMNPT12 FMNPT12-C2	FMPG13	FMM20 FMM20-C2
A3221204	FPNPT12	FPPG16	FPM20	FMNPT12	FMPG16	FMM25	A3311404	FPNPT12-R	FPPG13	FPM20-R	FMNPT12 FMNPT12-C2	FMPG13	FMM20 FMM20-C2
A3221205	FPNPT12	FPPG16	FPM20	N/A	FMPG16	FMM25	A3311405	FPNPT12	FPPG13	FPM20	FMNPT12 FMNPT12-C2	FMPG13	FMM20 FMM20-C2
A3221207	FPNPT34	FPPG21	FPM25	FMNPT34	FMPG21	FMM32	A3311407	FPNPT12	FPPG16	FPM20	FMNPT12 FMNPT12-C2	FMPG16	FMM25 FMM25-C2
A3221403	FPNPT38	FPPG11	FPM16	FMNPT12	FMPG11	FMM20	A3311412	FPNPT34	FPPG21	FPM25	FMNPT34 FMNPT34-C2	FMPG21	FMM32 FMM25-C2
A3221404	FPNPT12-R	FPPG13	FPM20-R	FMNPT12	FMPG13	FMM20	A3311603	FPNPT38	FPPG11	FPM16	FMNPT12 FMNPT12-C2	FMPG11	FMM20 FMM16-C2
A3221405	FPNPT12-R	FPPG13	FPM20-R	FMNPT12	FMPG13	FMM20	A3311604	FPNPT38	FPPG13	FPM16	FMNPT12 FMNPT12-C2	FMPG13	FMM20 FMM20-C2
A3221407	FPNPT12	FPPG16	FPM20	FMNPT12	FMPG16	FMM25	A3311605	FPNPT12-R	FPPG13	FPM20-R	FMNPT12 FMNPT12-C2	FMPG13	FMM20 FMM20-C2
A3221412	FPNPT34	FPPG21	FPM25	FMNPT34	FMPG21	FMM32	A3311607	FPNPT12	FPPG13	FPM20	FMNPT12 FMNPT12-C2	FMPG13	FMM20 FMM20-C2
A3221602	FPNPT38	FPPG11	FPM16	FMNPT12	FMPG11	FMM20	A3311612	FPNPT34	FPPG21	FPM25	FMNPT34 FMNPT34-C2	FMPG21	FMM32 FMM25-C2
A3221603	FPNPT38	FPPG11	FPM16	FMNPT12	FMPG11	FMM20	A3311618	FPNPT34	FPPG21	FPM25	FMNPT34 FMNPT34-C2	FMPG21	FMM32 FMM32-C2
A3221604	FPNPT38	FPPG11	FPM16	FMNPT12	FMPG11	FMM20	A3311625	FPNPT10	FPPG29	FPM32	FMNPT10 FMNPT10-C2	FMPG29	FMM40 FMM32-C2
A3221605	FPNPT12-R	FPPG13	FPM20-R	FMNPT12	FMPG13	FMM20	A3311803	FPNPT38	FPPG11	FPM16	FMNPT12 FMNPT12-C2	FMPG11	FMM20 FMM16-C2
A3221607	FPNPT12-R	FPPG13	FPM20-R	FMNPT12	FMPG13	FMM20	A3311804	FPNPT38	FPPG11	FPM16	FMNPT12 FMNPT12-C2	FMPG11	FMM20 FMM16-C2
A3221609	FPNPT12	FPPG16	FPM20	FMNPT12	FMPG16	FMM25	A3311805	FPNPT38	FPPG13	FPM16	FMNPT12 FMNPT12-C2	FMPG13	FMM20 FMM20-C2
A3221612	FPNPT12	FPPG16	FPM20	FMNPT34	FMPG16	FMM25	A3311807	FPNPT12-R	FPPG13	FPM20-R	FMNPT12 FMNPT12-C2	FMPG13	FMM20 FMM20-C2
A3221618	FPNPT34	FPPG21	FPM25	FMNPT34	FMPG21	FMM32	A3311812	FPNPT12	FPPG16	FPM20	N/A	FMPG16	FMM25 FMM25-C2
A3221625	FPNPT10	FPPG29	FPM32	FMNPT10	FMPG29	FMM40	A3311818	FPNPT34	FPPG21	FPM25	FMNPT34 FMNPT34-C2	FMPG21	FMM32 FMM25-C2
A3221803	FPNPT38	FPPG11	FPM16	FMNPT12	FMPG11	FMM20	A3311825	FPNPT34	FPPG21	FPM25	FMNPT34 FMNPT34-C2	FMPG21	FMM32 FMM32-C2
A3221804	FPNPT38	FPPG11	FPM16	FMNPT12	FMPG11	FMM20	A3320204	N/A	FPPG36	FPM40	N/A	FMPG36	FMM50
A3221805	FPNPT38	FPPG11	FPM16	FMNPT12	FMPG11	FMM20	A3320404	N/A	FPPG36	FPM40	N/A	FMPG36	FMM50
A3221807	FPNPT12-R	FPPG13	FPM20-R	FMNPT12	FMPG13	FMM20	A3320604	FPNPT10	FPPG29	FPM32	FMNPT10	FMPG29	FMM40
A3221809	FPNPT12	FPPG13	FPM20	FMNPT12	FMPG13	FMM20	A3320804	FPNPT10-R	FPPG29-R	FPM32-R	FMNPT10	FMPG29	FMM40
A3221812	FPNPT12	FPPG16	FPM20	N/A	FMPG16	FMM25	A3321004	N/A	FPPG48	FPM63	N/A	FMPG48	FMM63
A3221818	FPNPT34	FPPG21	FPM25	FMNPT34	FMPG21	FMM32	A3321003	FPNPT12	FPPG16	FPM20	FMNPT12	FMPG16	FMM25
A3221825	FPNPT34	FPPG21	FPM25	FMNPT34	FMPG21	FMM32	A3321004	FPNPT12	FPPG16	FPM20	N/A	FMPG16	FMM25
A3251204	FPNPT12	FPPG16	FPM20	FMNPT12	FMPG16	FMM25	A3321005	FPNPT34	FPPG21	FPM25	FMNPT34	FMPG21	FMM32
A3251403	FPNPT38	FPPG11	FPM16	FMNPT12	FMPG11	FMM20	A3321203	FPNPT12-R	FPPG13	FPM20-R	FMNPT12	FMPG13	FMM20
A3251404	FPNPT12-R	FPPG13	FPM20-R	FMNPT12	FMPG13	FMM20	A3321204	FPNPT12-R	FPPG13	FPM20	FMNPT12	FMPG13	FMM20
A3251603	FPNPT38	FPPG11	FPM16	FMNPT12	FMPG11	FMM20	A3321205	FPNPT12	FPPG16	FPM20	FMNPT12	FMPG16	FMM25
A3251605	FPNPT38	FPPG13	FPM16	FMNPT12	FMPG13	FMM20	A3321207	FPNPT12	FPPG16	FPM20	N/A	FMPG16	FMM25
A3251607	FPNPT12-R	FPPG13	FPM20-R	FMNPT12	FMPG13	FMM20	A3321403	FPNPT38	FPPG11	FPM16	FMNPT12	FMPG11	FMM20

# LUTZE Fittings Selection Chart

Part#	Plastic NPT	Plastic PG	Plastic Metric	Metal NPT	Metal PG	Metal Metric	Part#	Plastic NPT	Plastic PG	Plastic Metric	Metal NPT	Metal PG	Metal Metric
A3321404	FPNPT38	FPPG13	FPM16	FMNPT12	FMPG13	FMM20	A3321818	FPNPT34	FPPG21	FPM25	FMNPT34	FMPG21	FMM32
A3321405	FPNPT12-R	FPPG13	FPM20-R	FMNPT12	FMPG13	FMM20	A3321825	FPNPT34	FPPG21	FPM25	FMNPT34	FMPG21	FMM32
A3321407	FPNPT12	FPPG16	FPM20	FMNPT12	FMPG16	FMM25	A3322/004	N/A	FPPG36	FPM40	N/A	FMPG36	FMM50
A3321412	FPNPT34	FPPG21	FPM25	FMNPT34	FMPG21	FMM32	A3323/004	N/A	N/A	N/A	FMNPT212-CEX	N/A	FMM75-CEX
A3321602	FPNPT38	FPPG11	FPM16	FMNPT12	FMPG11	FMM20	A3324/004	N/A	N/A	N/A	N/A	N/A	N/A
A3321603	FPNPT38	FPPG11	FPM16	FMNPT12	FMPG11	FMM20	A601XX	FPNPT34	FPPG21	FPM25	FMNPT34	FMPG21	FMM32
A3321604	FPNPT38	FPPG11	FPM16	FMNPT12	FMPG11	FMM20	A602XX	FPNPT12	FPPG16	FPM20	FMNPT12	FMPG16	FMM25
A3321605	FPNPT38	FPPG13	FPM16	FMNPT12	FMPG13	FMM20	A604XX	FPNPT12-R	FPPG13	FPM20-R	FMNPT12	FMPG13	FMM20
A3321607	FPNPT12-R	FPPG13	FPM20-R	FMNPT12	FMPG13	FMM20	A606XX	FPNPT38	FPPG11	FPM16	FMNPT12	FMPG11	FMM20
A3321612	FPNPT34	FPPG21	FPM25	FMNPT34	FMPG21	FMM32	A608XX	FPNPT38	FPPG9	FPM16	FMNPT38	FMPG9	FMM16
A3321618	FPNPT34	FPPG21	FPM25	FMNPT34	FMPG21	FMM32	A610XX	FPNPT38-R	FPPG7	FPM12	FMNPT38	FMPG7	FMM12
A3321625	FPNPT10-R	FPPG29-R	FPM32-R	FMNPT10	FMPG29	FMM40	A612XX	FPNPT38-R	FPPG7	FPM12	FMNPT38	FMPG7	FMM12
A3321802	FPNPT38	FPPG9	FPM16	FMNPT12	FMPG9	FMM20	A614XX	FPNPT38-R	FPPG7	FPM12	N/A	FMPG7	FMM12
A3321803	FPNPT38	FPPG9	FPM16	FMNPT12	FMPG9	FMM20	A616XX	FPNPT38-R	FPPG7-R	FPM12-R	N/A	FMPG7	FMM12
A3321804	FPNPT38	FPPG11	FPM16	FMNPT12	FMPG11	FMM20	A618XX	N/A	FPPG7-R	FPM12-R	N/A	N/A	N/A
A3321805	FPNPT38	FPPG11	FPM16	FMNPT12	FMPG11	FMM20	A619XX	N/A	FPPG7-R	FPM12-R	N/A	N/A	N/A
A3321807	FPNPT38	FPPG13	FPM16	FMNPT12	FMPG13	FMM20	A6700X	FPNPT34	FPPG21	FPM25	FMNPT34	FMPG21	FMM32
A3321812	FPNPT12	FPPG16	FPM20	FMNPT12	FMPG16	FMM25	A6950X	FPNPT10-R	FPPG29-R	FPM32-R	FMNPT34	FMPG21	FMM32

# LUTZE Part Number Index

Part#	Page	Part#	Page	Part#	Page	Part#	Page	Part#	Page	Part#	Page
104198	37	111292	56	113303	19	113484	18	117190	26	600225	73
104216	31	111293	56	113304	19	113485	18	117191	26	600226	73
104217	31	111294	56	113305	19	113570	18	117193	26	600227	73
104265	33	111295	56	113312	19	113571	18	117194	26	600228	73
104275	33	111296	56	113313	19	113572	18	117196	26	600229	73
104280	36	111337	55	113314	19	113573	18	117199	26	600230	73
104281	36	111370	51	113315	19	113574	18	117201	26	600320	80
104287	33	111371	51	113316	19	113575	18	117202	26	600321	80
104289	37	111372	51	113317	19	113576	18	117240	28	600347	80
104293	32	111373	51	113318	19	113577	18	117241	28	600400	73
104301	38	111374	51	113319	19	117028	24	117242	28	600401	73
104302	39	111375	51	113320	19	117029	24	117243	28	600402	73
104303	39	111376	51	113321	19	117039	24	117244	28	600403	73
104307	38	111377	51	113322	19	117040	24	117245	28	600404	73
104310	59	111378	51	113323	19	117041	24	117246	28	600405	73
104331	38	111388	54	113324	19	117042	24	117250	29	600406	73
104335	38	111412	59	113331	19	117043	24	117251	29	600407	73
104336	38	111420	53	113332	19	117044	24	117252	29	600408	73
104337	39	111421	53	113339	19	117046	24	117253	29	600409	73
104338	38	111422	53	113340	19	117047	24	117254	29	600410	73
104344	32	111423	53	113341	19	117048	24	117255	29	600411	73
104347	39	111424	53	113342	19	117049	24	117303	26	600412	73
104349	38	111425	53	113344	19	117050	24	330060.0010	76	600413	73
104378	32	111426	53	113347	19	117051	24	330071.0010	76	600414	73
104379	39	111427	53	113360	19	117052	24	330072.0010	76	600416	73
104386	34	111428	53	113361	19	117053	24	330073.0010	76	600460	72
104387	34	111429	51	113362	19	117055	24	330089.0100	76	600461	72
104388	34	111430	51	113363	19	117056	24	331000.0010	76	600462	72
104389	34	111452	59	113364	19	117099	25	331001.0010	76	600463	72
104390	35	111453	59	113365	19	117100	25	331002.0010	76	600464	72
104391	35	111454	59	113366	19	117101	25	331003.0010	76	600465	72
104396	39	111456	59	113400	18	117102	25	331004.0010	76	600466	72
104397	38	111457	59	113401	18	117103	25	346812	76	600541	75
110872	28	111458	59	113402	18	117104	25	346813	76	600542	75
110874	28	111459	59	113403	18	117106	25	346814.0010	76	600543	75
110940	57	111460	52	113404	18	117107	25	346860	76	600544	75
110941	57	111461	52	113405	18	117108	25	490105	83	600545	75
111126	55	111462	52	113406	18	117109	25	490106	83	600546	75
111127	55	111463	52	113407	18	117110	25	490107	83	600550	66
111128	55	111464	52	113408	18	117111	25	490108	83	600551	66
111129	55	111465	52	113409	18	117112	25	490112	82	600553	66
111130	55	111466	52	113410	18	117113	25	490113.0030	82	600554	66
111131	55	111467	52	113411	18	117115	25	490113.0060	82	600557	66
111132	55	111468	52	113412	18	117116	25	490113.0080	82	600558	66
111133	55	111488	58	113415	18	117124	25	490113.0150	82	600561	66
111136	55	111489	58	113416	18	117170	26	490113.0200	82	600562	66
111197	55	111495	57	113417	18	117171	26	490113.0300	82	600565	66
111243	55	111545	51	113426	18	117172	26	490113.0500	82	600566	66
111270	54	111548	51	113431	18	117173	26	490128	83	600626	75
111271	54	111762	54	113433	18	117174	26	490129	83	600627	75
111276	54	111778	60	113438	18	117175	26	490138	83	600628	75
111277	54	111779	60	113441	18	117176	26	490151	83	600629	75
111278	54	111780	57	113442	18	117177	26	491075	82	600630	75
111279	54	111781	57	113443	18	117180	26	492075	82	600631	75
111285	55	111879	52	113444	18	117181	26	600220	73	600632	75
111288	56	111998	54	113446	18	117182	26	600221	73	600633	75
111289	56	113300	19	113447	18	117184	26	600222	73	600634	75
111290	56	113301	19	113479	18	117185	26	600223	73	600635	75
111291	56	113302	19	113483	18	117187	26	600224	73	600636	75

# LUTZE Part Number Index

Part#	Page	Part#	Page	Part#	Page	Part#	Page	Part#	Page	Part#	Page
600637	75	108350A	13	A1381805	16	A2171604	45	A3080204	7	A3091605	8
600638	75	108351A	13	A1381807	16	A2180804	46	A3080404	7	A3091607	8
600639	75	108352A	13	A1381812	16	A2181004	46	A3080604	7	A3091612	8
600640	75	108353A	13	A1381818	16	A2181204	46	A3080804	7	A3091618	8
600641	75	108354A	13	A1381825	16	A2181404	46	A3080805	7	A3091625	8
600642	75	108355A	13	A1381834	16	A2181604	46	A3081004	7	A3091802	8
600643	75	108356A	13	A1381841	16	A2200103	47	A3081005	7	A3091803	8
600644	75	108357A	13	A1381850	16	A2200203	47	A3081203	7	A3091804	8
600645	75	108358A	13	A1382003	16	A2200403	47	A3081204	7	A3091805	8
600646	75	108359A	13	A1382004	16	A2200603	47	A3081205	7	A3091807	8
600647	75	108360A	13	A1382005	16	A2201/003	47	A3081207	7	A3091812	8
600648	75	108361A	13	A1382007	16	A2202/003	47	A3081403	6	A3091818	8
600649	75	108362A	13	A1382012	16	A22025003	47	A3081404	6	A3091825	8
600651	75	108363A	13	A1382018	16	A2203/003	47	A3081405	6	A3092003	8
600652	75	108372A	13	A1382025	16	A22035003	47	A3081407	6	A3092004	8
600653	75	108373A	13	A1391204	17	A2204/003	47	A3081409	6	A3092005	8
600654	75	108374A	13	A1391207	17	A22050003	47	A3081412	6	A3092007	8
600655	75	108375A	13	A1391404	17	A2441402	48	A3081418	6	A3092012	8
600656	75	108376A	13	A1391405	17	A2441404	48	A3081425	6	A3092018	8
606001	78	108377A	13	A1391407	17	A2441602	48	A3081602	6	A3092025	8
606002	78	108378A	13	A1391603	17	A2441604	48	A3081603	6	A3131602	22
606004	78	108380A	13	A1391604	17	A2441802	48	A3081604	6	A3131603	22
606005	78	108381A	13	A1391605	17	A2441804	48	A3081605	6	A3131604	22
606007	78	108382A	13	A1391607	17	A3031602	21	A3081607	6	A3131606	22
606052	78	108383A	13	A1391612	17	A3031603	21	A3081609	6	A3131608	22
606053	78	108384A	13	A1391618	17	A3031606	21	A3081612	6	A3131610	22
606150	78	108385A	13	A1391625	17	A3031608	21	A3081618	6	A3131615	22
606151	78	108386A	13	A1391803	17	A3031610	21	A3081625	6	A3131620	22
606152	78	108389A	13	A1391804	17	A3031615	21	A3081634	6	A3131625	22
606153	78	108391A	13	A1391805	17	A3031620	21	A3081641	6	A3131802	22
606154	78	108392A	13	A1391807	17	A3031625	21	A3081802	6	A3131803	22
606155	78	108393A	13	A1391812	17	A3031802	21	A3081803	6	A3131804	22
606156	78	108401A	13	A1391818	17	A3031803	21	A3081804	6	A3131806	22
606157	78	A1060804	42	A1391825	17	A3031804	21	A3081805	6	A3131808	22
606158	78	A1061004	42	A1391834	17	A3031806	21	A3081807	6	A3131810	22
606159	78	A1061204	42	A1392003	17	A3031808	21	A3081809	6	A3131815	22
606160	78	A1061404	42	A1392004	17	A3031810	21	A3081812	6	A3131820	22
606200	78	A1061604	42	A1392005	17	A3031815	21	A3081818	6	A3131825	22
606201	78	A1061804	42	A1392007	17	A3031820	21	A3081825	6	A3132002	22
606202	78	A1070804	43	A1392012	17	A3031825	21	A3081834	6	A3132003	22
606203	78	A1071004	43	A1392018	17	A3032002	21	A3081841	6	A3132004	22
606204	78	A1071204	43	A1392025	17	A3032003	21	A3081850	6	A3132006	22
606205	78	A1071404	43	A1410001	50	A3032004	21	A3082003	6	A3132008	22
606206	78	A1071604	43	A1410002	50	A3032006	21	A3082004	6	A3132010	22
606207	78	A1071804	43	A2160204	44	A3032008	21	A3082005	6	A3132015	22
606208	78	A1381204	16	A2160404	44	A3032010	21	A3082007	6	A3132020	22
606209	78	A1381207	16	A2160604	44	A3032015	21	A3082012	6	A3132025	22
606250	78	A1381404	16	A2160804	44	A3032020	21	A3082018	6	A3132202	22
606251	78	A1381405	16	A2161004	44	A3032025	21	A3082025	6	A3132203	22
606252	78	A1381407	16	A2161204	44	A3032202	21	A3091004	8	A3132204	22
606253	78	A1381603	16	A2161404	44	A3032203	21	A3091203	8	A3132206	22
606254	78	A1381604	16	A2161604	44	A3032204	21	A3091204	8	A3132208	22
606255	78	A1381605	16	A2170204	45	A3032206	21	A3091403	8	A3132210	22
606256	78	A1381607	16	A2170404	45	A3032208	21	A3091404	8	A3132215	22
606257	78	A1381612	16	A2170604	45	A3032210	21	A3091405	8	A3132220	22
606258	78	A1381618	16	A2170804	45	A3032215	21	A3091407	8	A3132225	22
606259	78	A1381625	16	A2171004	45	A3032220	21	A3091412	8	A3141602	23
606260	78	A1381803	16	A2171204	45	A3032225	21	A3091603	8	A3141604	23
108349A	13	A1381804	16	A2171404	45	A3031604	21	A3091604	8	A3141606	23

# LUTZE Part Number Index

Part#	Page	Part#	Page	Part#	Page	Part#	Page	Part#	Page	Part#	Page
A3141608	23	A3221804	9	A3321005	10	A61604	14	FMNPT2-CEX	71	FPPG11B	63
A3141612	23	A3221805	9	A3321203	10	A61605	14	FMNPT34	67	FPPG11G	63
A3141616	23	A3221807	9	A3321204	10	A61614	14	FMNPT34-C2	70	FPPG11G-R	63
A3141802	23	A3221809	9	A3321204	41	A61615	14	FMNPT38	67	FPPG13B	63
A3141804	23	A3221812	9	A3321205	10	A61644	14	FMNPT38-C2	70	FPPG13G	63
A3141806	23	A3221818	9	A3321207	10	A61800	14	FMNPT3-CEX	71	FPPG13G-R	63
A3141808	23	A3221825	9	A3321403	10	A61801	14	FMPG11	68	FPPG16B	63
A3141810	23	A3251204	12	A3321404	10	A61802	14	FMPG11-L	68	FPPG16G	63
A3141812	23	A3251403	12	A3321404	41	A61803	14	FMPG13	68	FPPG16G-R	63
A3141816	23	A3251404	12	A3321405	10	A61804	14	FMPG13-L	68	FPPG21B	63
A3142002	23	A3251603	12	A3321407	10	A61814	14	FMPG16	68	FPPG21G	63
A3142004	23	A3251605	12	A3321412	10	A61844	14	FMPG16-L	68	FPPG21G-R	63
A3142006	23	A3251607	12	A3321602	10	A61900	14	FMPG21	68	FPPG29B	63
A3142008	23	A3251612	12	A3321603	10	A61901	14	FMPG21-L	68	FPPG29G	63
A3142010	23	A3251619	12	A3321604	10	A61902	14	FMPG29	68	FPPG29G-R	63
A3142012	23	A3251625	12	A3321605	10	A61903	14	FMPG29-L	68	FPPG36B	63
A3142016	23	A3251803	12	A3321607	10	A61904	14	FMPG36	68	FPPG36G	63
A3142202	23	A3251805	12	A3321612	10	A61914	14	FMPG42	68	FPPG36G-R	63
A3142204	23	A3251807	12	A3321618	10	A67000	15	FMPG48	68	FPPG42B	63
A3142206	23	A3251812	12	A3321625	10	A67001	15	FMPG7	68	FPPG42G	63
A3142208	23	A3251819	12	A3321802	10	A69500	15	FMPG7-L	68	FPPG48B	63
A3142210	23	A3251825	12	A3321803	10	A69501	15	FMPG9	68	FPPG48G	63
A3142212	23	A3251837	12	A3321804	10	AMM16-12	74	FMPG9-L	68	FPPG7B	63
A3142216	23	A3311004	11	A3321805	10	AMM20-12	74	FPM12B	64	FPPG7G	63
A3160804	49	A3311203	11	A3321807	10	AMM25-34	74	FPM12G	64	FPPG7G-R	63
A3161004	49	A3311204	11	A3321812	10	AMM32-10	74	FPM12G-R	64	FPPG9B	63
A3161204	49	A3311205	11	A3321818	10	AMM32-34	74	FPM16B	64	FPPG9G	63
A3161404	49	A3311403	11	A3321825	10	FMM12	69	FPM16G	64	FPPG9G-R	63
A3161604	49	A3311404	11	A3322/004	10	FMM12-C2	70	FPM16G-R	64	LMM12	72
A3170204	49	A3311405	11	A3322/004	41	FMM12-L	69	FPM20B	64	LMM16	72
A3170404	49	A3311407	11	A3323/004	10	FMM16	69	FPM20G	64	LMM20	72
A3170604	49	A3311412	11	A3323/004	41	FMM16-C2	70	FPM20G-R	64	LMM25	72
A3170804	49	A3311603	11	A3324/004	10	FMM16-L	69	FPM25B	64	LMM32	72
A3171004	49	A3311604	11	A3324/004	41	FMM20	69	FPM25G	64	LMM40	72
A3171204	49	A3311605	11	A60100	15	FMM20-C2	70	FPM25G-R	64	LMM50	72
A3171404	49	A3311607	11	A60101	15	FMM20-L	69	FPM32B	64	LMM63	72
A3171604	49	A3311612	11	A60200	15	FMM25	69	FPM32G	64	LMPG11	72
A3220604	9	A3311618	11	A60201	15	FMM25-C2	70	FPM32G-R	64	LMPG13	72
A3220804	9	A3311625	11	A60400	15	FMM25-L	69	FPM40B	64	LMPG16	72
A3221004	9	A3311803	11	A60401	15	FMM32	69	FPM40G	64	LMPG21	72
A3221203	9	A3311804	11	A60600	15	FMM32-C2	70	FPM40G-R	64	LMPG29	72
A3221204	9	A3311805	11	A60601	15	FMM32-L	69	FPM50B	64	LMPG36	72
A3221205	9	A3311807	11	A60800	14	FMM40	69	FPM50G	64	LMPG42	72
A3221207	9	A3311812	11	A60801	14	FMM40-C2	70	FPM50G-R	64	LMPG48	72
A3221403	9	A3311818	11	A61000	14	FMM40-L	69	FPM63B	64	LMPG7	72
A3221404	9	A3311825	11	A61001	14	FMM50	69	FPM63G	64	LMPG9	72
A3221405	9	A3320204	10	A61200	14	FMM50-C2	70	FPM63G-R	64	LPM12B	65
A3221407	9	A3320204	41	A61201	14	FMM50-L	69	FPNPT10B	62	LPM12G	65
A3221412	9	A3320404	10	A61400	14	FMM63	69	FPNPT10B-R	62	LPM16B	65
A3221602	9	A3320404	41	A61401	14	FMM63-C2	70	FPNPT10G	62	LPM16G	65
A3221603	9	A3320604	10	A61402	14	FMM63-CEX	71	FPNPT12B	62	LPM20B	65
A3221604	9	A3320604	41	A61403	14	FMM63-L	69	FPNPT12B-R	62	LPM20G	65
A3221605	9	A3320804	10	A61404	14	FMM75-CEX	71	FPNPT12G	62	LPM25B	65
A3221607	9	A3320804	41	A61405	14	FMM90-CEX	71	FPNPT34B	62	LPM25G	65
A3221609	9	A3321/004	10	A61414	14	FMNPT10	67	FPNPT34B-R	62	LPM32B	65
A3221612	9	A3321/004	41	A61600	14	FMNPT10-C2	70	FPNPT34G	62	LPM32G	65
A3221618	9	A3321003	10	A61601	14	FMNPT12	67	FPNPT38B	62	LPM40B	65
A3221625	9	A3321004	10	A61602	14	FMNPT12-C2	70	FPNPT38B-R	62	LPM40G	65
A3221803	9	A3321004	41	A61603	14	FMNPT212-CEX	71	FPNPT38G	62	LPM50B	65



# LUTZE Part Number Index

Part#	Page
LPM50G	65
LPM63B	65
LPM63G	65
LPNPT10B	65
LPNPT10G	65
LPNPT12B	65
LPNPT12G	65
LPNPT34B	65
LPNPT34G	65
LPNPT38B	65
LPNPT38G	65
LPPG11B	65
LPPG11G	65
LPPG13B	65
LPPG13G	65
LPPG16B	65
LPPG16G	65
LPPG21B	65
LPPG21G	65
LPPG29B	65
LPPG29G	65
LPPG36B	65
LPPG36G	65
LPPG42B	65
LPPG42G	65
LPPG48B	65
LPPG48G	65
LPPG7B	65
LPPG7G	65
LPPG9B	65
LPPG9G	65



## Servo Cable Assemblies according to Allen-Bradley® Standard 2090

**ONE YEAR  
WARRANTY**

- Static and continuous flexing applications
- Fully compatible with Rockwell Allen-Bradley® system
- Easy crossing by Allen-Bradley® 2090 or motor part numbers
- Manufactured exactly like the originals including conductor ends, exposed shield, shrink tubing, flying lead configuration, label positions and markings
- Identical motor connectors, including tamper proof and SpeedTec options
- Packing insert contains pin out, measurement and installation information
- Every assembly is tested for full functionality, conductivity, pin outs, and “hipot” voltage for electrical safety
- 0.5m increments to suit each application: no need for extra cable lengths
- Competitive lead times and pricing

LUTZE Inc .  
13330 South Ridge Drive,  
Charlotte, North Carolina 28273

1-800-447-2371  
info@lutze.com  
www.lutze.com

# Efficiency in Automation

Cable • Connectivity • Cabinet • Control



## Servo Cable Assemblies for static and continuous flexing applications

### LUTZE Silfex® static cable features:

- semi-conductive layer for high voltage spikes, reducing likelihood of corona-effect
- increased reliability and lifetime
- superior EMC compliance with 85% optical coverage of flexible braid shield

### LUTZE Superflex® Plus continuous flexing cable features:

- PP insulation with better electrical values and lower capacitance than PVC/Nylon
- rugged PUR jacket delivers improved mechanical performance and long flex life
- for the most demanding continuous flexing applications



LUTZE Inc .  
13330 South Ridge Drive,  
Charlotte, North Carolina 28273

1-800-447-2371  
info@lutze.com  
www.lutze.com



\* Allen-Bradley® is a registered trademark of Rockwell Allen Bradley.

# LUTZE Product Overview

## Cable Solutions

LUTZE specializes in flexible and continuous flexing industrial control, power and network cables, such as LUTZE Silflex®, LUTZE Superflex®, and DRIVEFLEX® VFD cables, for various applications in factory automation. Wire and cable management components for industrial automation complement the offering.




## Connectivity Solutions

In addition to industrial flexible and high flexing cables, LUTZE offers servo cable assemblies according to SIEMENS 6FX, Allen-Bradley® 2090 and Bosch Rexroth Indramat standards. As a special service LUTZE offers each cable assembly in custom lengths of 0.5m increments.



## Cabinet Solutions

LUTZE LSC Wiring System saves space, time and cost. LSC is an aluminum frame that replaces the traditional back panel and wire duct for mounting and wiring of electrical components in a control enclosure. LSC shortens wiring times and improves heat dissipation within the cabinet to enhance component longevity.

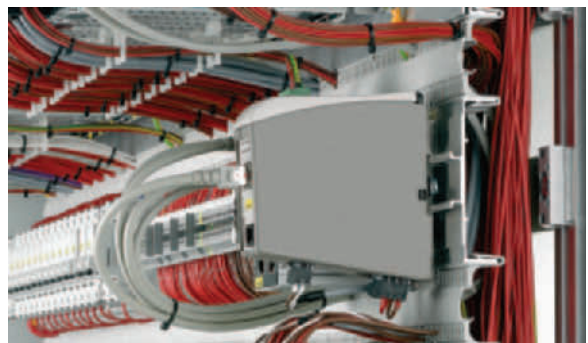

## Control Solutions

LUTZE offers din rail mountable compact power supplies, industrial Ethernet switches, LCIS relays and intelligent control circuit protection with the LUTZE LOCC-Box.



LUTZE Inc.  
13330 South Ridge Drive  
Charlotte, NC 28273  
Tel.: (704) 504-0222  
Fax: (704) 504-0223  
info@lutze.com

# Efficiency in Automation

Cable • Connectivity • Cabinet • Control

- Flexible and High Flexing Cable and Wire Management
- Servo Cable Assemblies
- Compact Power Supplies
- LOCC-Box Current Control
- LSC-Wiring System
- Ethernet Connectivity
- Interface Technology

[www.lutze.com](http://www.lutze.com)

1-800-447-2371

