

# BMP®41 Materials

BradyID.com/bmp41

## Bin, Storage, Reflective and General Industrial Labels (B-422, B-483, B-499, B-584, and B-595)

Several materials with an aggressive adhesive for use in commercial and industrial applications. Reflective materials can be used for low light or inclement weather conditions on outdoor utility poles and pedestals, job-site equipment and roof-top equipment.

**B-422 Polyester Material** - Permanent adhesive, good for powder-coated/textured surfaces. Best on flat surfaces. Temp. Range: -40°F to 212°F (-40°C to 100°C). UL recognized.

**B-483 Polyester Material** - Permanent adhesive for powder-coated/textured surfaces. Best on flat surfaces Temp. Range: -40°F to 248°F (-40°C to 120°C). UL recognized.

**B-499 Nylon Cloth Material** - Permanent adhesive. Pliable for rough or smooth surfaces. Temp. Range: -94°F to 194°F (-70°C to 90°C). UL recognized.

**B-584 Reflective Tape** - Reflective material shines back brightly when struck by light.

**B-595 Indoor/Outdoor Vinyl Material** - Permanent adhesive, very pliable, good for rough surfaces and outdoor use, wide range of colors. Temp. Range: -40°F to 248°F (-40°C to 120°C). UL recognized.


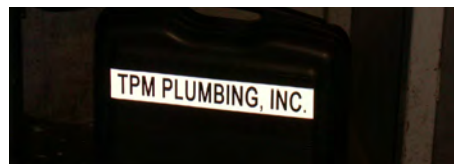


Figure 29




Figure 33

Fits Printer Models	Diagram	Catalog #	B#	Material	Color	Label Width A Inch (mm)	Label Height B Inch (mm)	Labels/Roll
<b>B-422 – Polyester Material</b>								
BMP41, 51, 53	Fig. 33	MC-375-422	B-422	Polyester	BK on WT	0.375 (9.5)	25 ft. (7.6 m)	1 roll (cont.)
BMP41, 51, 53	Fig. 33	MC-475-422	B-422	Polyester	BK on WT	0.475 (12.1)	25 ft. (7.6 m)	1 roll (cont.)
BMP41, 51, 53	Fig. 29	M-7-422	B-422	Polyester	BK on WT	0.500 (12.7)	0.500 (12.7)	280
BMP41, 51, 53	Fig. 33	MC-500-422	B-422	Polyester	BK on WT	0.500 (12.7)	25 ft. (7.6 m)	1 roll (cont.)
BMP41, 51, 53	Fig. 33	MC-625-422	B-422	Polyester	BK on WT	0.625 (15.9)	25 ft. (7.6 m)	1 roll (cont.)
BMP41, 51, 53	Fig. 29	M-47-422	B-422	Polyester	BK on WT	1.000 (25.4)	0.500 (12.7)	480
BMP41, 51, 53	Fig. 29	M-49-422	B-422	Polyester	BK on WT	1.000 (25.4)	1.000 (25.4)	260
BMP41, 51, 53	Fig. 33	MC1-1000-422	B-422	Polyester	BK on WT	1.000 (25.4)	25 ft. (7.6 m)	1 roll (cont.)
BMP41, 51, 53	Fig. 29	M-89-422	B-422	Polyester	BK on WT	1.500 (38.1)	0.500 (12.7)	180
BMP41, 51, 53	Fig. 29	M-90-422	B-422	Polyester	BK on WT	1.500 (38.1)	0.750 (19.1)	180
<b>B-483 – Ultra Aggressive Adhesive Polyester Material</b>								
BMP41, 51, 53	Fig. 29	M-47-483	B-483	Polyester	BK on WT	1.000 (25.4)	0.500 (12.7)	480
BMP41, 51, 53	Fig. 29	M-60-483	B-483	Polyester	BK on WT	2.000 (50.8)	1.000 (25.4)	140
<b>B-499 – Nylon Cloth Labels</b>								
BMP41, 51, 53	Fig. 33	MC-375-499	B-499	Nylon Cloth	BK on WT	0.375 (9.5)	16 ft. (4.9 m)	1 roll (cont.)
BMP41, 51, 53	Fig. 33	MC-500-499	B-499	Nylon Cloth	BK on WT	0.500 (12.7)	16 ft. (4.9 m)	1 roll (cont.)
BMP41, 51, 53	Fig. 29	M-11-499	B-499	Nylon Cloth	BK on WT	0.750 (19.1)	0.500 (12.7)	220
BMP41, 51, 53	Fig. 33	MC-750-499	B-499	Nylon Cloth	BK on WT	0.750 (19.1)	16 ft. (4.9 m)	1 roll (cont.)
BMP41, 51, 53	Fig. 29	M-130-499	B-499	Nylon Cloth	BK on WT	0.825 (20.9)	0.375 (9.5)	220
BMP41, 51, 53	Fig. 29	M-84-499	B-499	Nylon Cloth	BK on WT	0.900 (22.8)	0.500 (12.7)	200
BMP41, 51, 53	Fig. 29	M-131-499	B-499	Nylon Cloth	BK on WT	1.000 (25.4)	0.500 (12.7)	180
BMP41, 51, 53	Fig. 29	M-128-499	B-499	Nylon Cloth	BK on WT	1.000 (25.4)	1.900 (48.3)	100
<b>B-584 – Reflective Tape</b>								
BMP41, 51, 53	Fig. 33	MC-500-584	B-584	Reflective	BK on WT	0.500 (12.7)	20 ft. (6.1 m)	1 roll (cont.)
BMP41, 51, 53	Fig. 33	MC-750-584	B-584	Reflective	BK on WT	0.750 (19.1)	20 ft. (6.1 m)	1 roll (cont.)
BMP41, 51, 53	Fig. 33	MC-500-584-YL	B-584	Reflective	BK on YL	0.500 (12.7)	20 ft. (6.1 m)	1 roll (cont.)
BMP41, 51, 53	Fig. 33	MC-750-584-YL	B-584	Reflective	BK on YL	0.750 (19.1)	20 ft. (6.1 m)	1 roll (cont.)
<b>B-595 – Indoor/Outdoor Vinyl Tape</b>								
BMP41, 51, 53	Fig. 33	MC-500-595-RD-WT	B-595	Vinyl	WT on RD*	0.500 (12.7)	25 ft. (7.6 m)	1 roll (cont.)
BMP41, 51, 53	Fig. 33	MC-750-595-RD-WT	B-595	Vinyl	WT on RD*	0.750 (19.1)	25 ft. (7.6 m)	1 roll (cont.)
BMP41, 51, 53	Fig. 33	MC1-1000-595-RD-WT	B-595	Vinyl	WT on RD*	1.000 (25.4)	25 ft. (7.6 m)	1 roll (cont.)

\* For additional general purpose tapes, refer to the Indoor/Outdoor Grade Facility and Safety Labels on page 295.