


GeneralCable
 CROSSED-LINKED POLYETHYLENE #22AWG

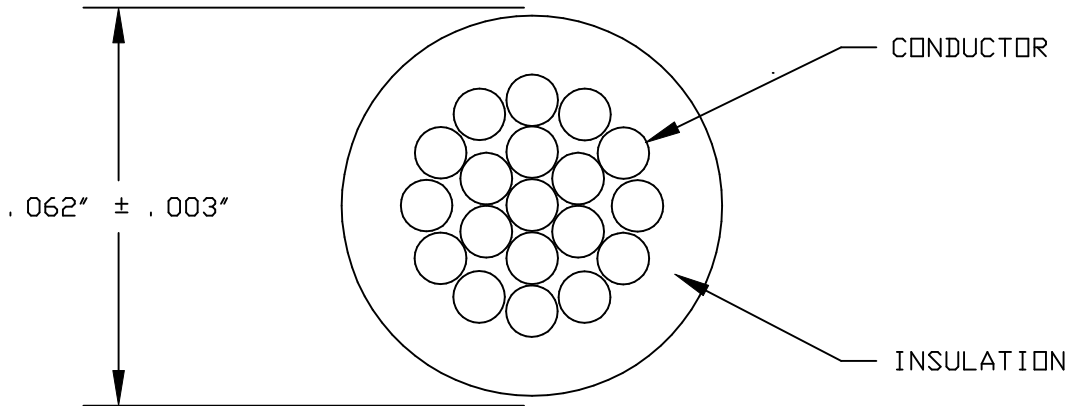

MATERIAL

CONDUCTOR: #22AWG 19/34 TINNED COPPER
 INSULATION: XLPE -.016" NOMINAL WALL
 DIAMETER: .062" NOMINAL

REQUIREMENTS

CONDUCTOR DCR: 15.5 OHMS/1000' MAX @ 20°C
 UL: STYLE 3266 125°C 300V
 CSA: AWM 125°C 300V
 MIL-W-16878/15: 125°C 1000V
 COLOR: WHITE
 WEIGHT: 4.26 LBS/1000 FT

GeneralCable PART NUMBER

682440.09

PRINT

*68A9377P22 125C 300V 22AWG 19STRD STYLE 3266 RJ
 AWM GENERAL CABLE BRAND REX BRAND (WC) XP221619-GE
 /CSA AWM IA 125C 300V FT1/MIL-W-16878/15"

REVISIONS	0	08/17/10	FIRST ISSUE	<p>GeneralCable 1600 West Main Street, Willimantic, CT 06226-1128 <u>The Power of One</u></p>	
REFERENCES	IEWC/GE 68A9377P22WH19			DRAWING NO: 12-1844	
	GeneralCable P/N 682440.09			DRAWN BY: CAD	
				APPROVED BY: M. LAJEUNESSE	
				THIS DRAWING IS THE PROPERTY OF GeneralCable AND SHALL NOT BE REPRODUCED, COPIED, OR USED AS BASIS FOR THE MANUFACTURE OR SALE OF THIS DESIGN WITHOUT THE PERMISSION OF GeneralCable	