


GeneralCable  
 CROSSED-LINKED POLYETHYLENE #14AWG

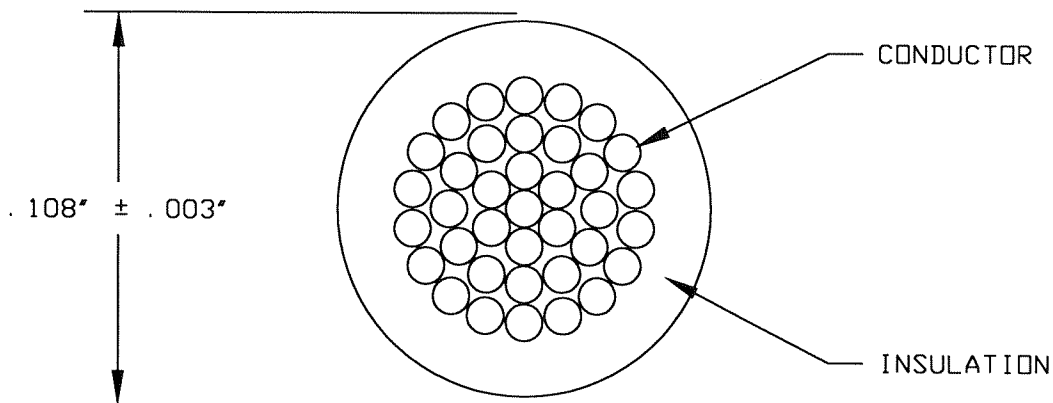

MATERIAL

-----  
 CONDUCTOR: #14AWG 41/30 TINNED COPPER  
 INSULATION: XLPE -.019" NOMINAL WALL  
 DIAMETER: .108" NOMINAL

REQUIREMENTS

-----  
 CONDUCTOR DCR: 2.82 OHMS/1000' MAX @ 20°C  
 UL: STYLE #3266/CSA: AWM/MIL: 16878/15  
 TEMPERATURE RATING: 125°C  
 VOLTAGE RATING: 300V  
 WEIGHT: 16.4 LBS/1000 FT

GeneralCable PART NUMBER

-----  
 507040.03 ORANGE

PRINT

-----  
 \*68A9377P14 125C 300V 14AWG 41STRD STYLE 3266 RJ AWM GENERAL CABLE  
 BRAND REX BRAND (WC) XP141941-166-GE/CSA AWM IA 125C 300V FT1/  
 MIL-W-16878/15 (1000V)\*

REVISES	0	01/15/07	FIRST ISSUE	<b>GeneralCable</b> 1600 West Main Street, Willimantic, CT 06226-1128 <u>The Power of One</u>	
REFERENCES	IEWC/GE P/N 68A9377P14 ORANGE			DRAWING NO: 12-1709	
	GeneralCable P/N 507040.03			DRAWN BY: CAD	
	XP141941-166-GE			APPROVED BY: M. LAJEUNESSE	
				THIS DRAWING IS THE PROPERTY OF GeneralCable AND SHALL NOT BE REPRODUCED, COPIED, OR USED AS BASIS FOR THE MANUFACTURE OR SALE OF THIS DESIGN WITHOUT THE PERMISSION OF GeneralCable	