


GeneralCable  
UL STYLE 3271 #20AWG

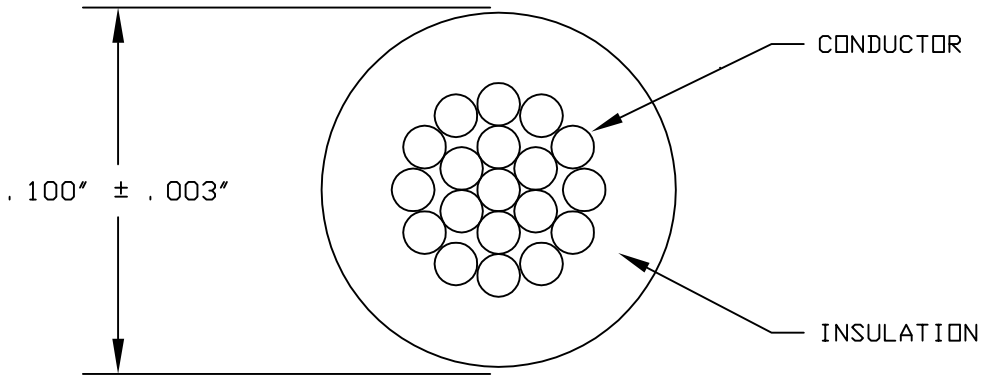

MATERIAL

CONDUCTOR: #20AWG 19/32 TINNED COPPER  
INSULATION: XLPE -.031" NOMINAL WALL  
DIAMETER: .100" NOMINAL

REQUIREMENTS

CONDUCTOR DIAMETER: 0.0376"  
UL: STYLE 3271 125°C  
CSA: AWM 125°C  
VOLTAGE RATING: 600V  
WEIGHT: 8.6 LBS/1000 FT

GeneralCable PART NUMBERS

207000.00 - BLACK  
207000.02 - RED  
207000.06 - BLUE  
207000.09 - WHITE

PRINT

"68A9378P20 125C 600V 20AWG 19STRD STYLE 3271 RJ AWM GENERAL CABLE  
BRAND REX BRAND (WC) XP203119-GE/CSA AWM IA 125C 600V  
FT1/IAM MIL-W-16878/16"

APPLICABLE SPECIFICATIONS

UL: STANDARD 758  
CSA: CSA STANDARD C22.2 NO. 210.2  
MIL: MIL-W-16878/16

REVISIONS	0	02/16/12	FIRST ISSUE	<p><b>GeneralCable</b> 1600 West Main Street, Willimantic, CT 06226-1128 <u>The Power of One</u></p>	
REFERENCES	IEWC/GE 68A9378P20			DRAWING NO: 12-1884	
	GeneralCable P/N 207000.XX			DRAWN BY: CAD	
				APPROVED BY: M. LAJEUNESSE	
				THIS DRAWING IS THE PROPERTY OF GeneralCable AND SHALL NOT BE REPRODUCED, COPIED, OR USED AS BASIS FOR THE MANUFACTURE OR SALE OF THIS DESIGN WITHOUT THE PERMISSION OF GeneralCable	