


GeneralCable
UL STYLE 3271 #16AWG

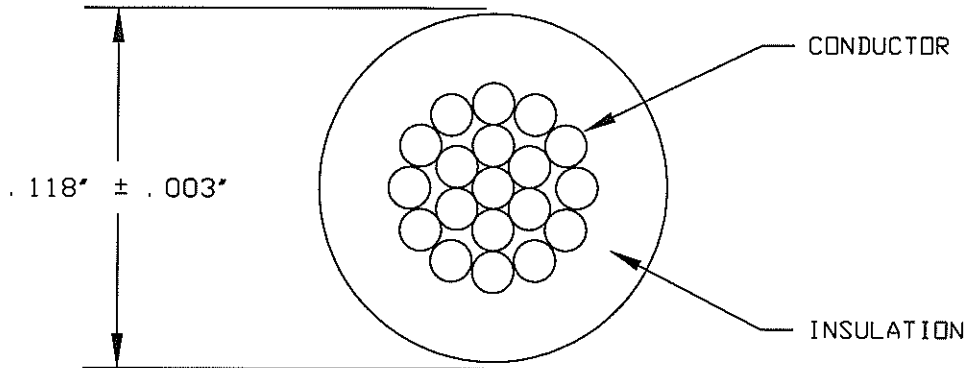

MATERIAL

CONDUCTOR: #16AWG 19/.0117 TINNED COPPER
INSULATION: XLPE -.031" NOMINAL WALL
DIAMETER: .118" NOMINAL

REQUIREMENTS

CONDUCTOR DIAMETER: 0.056"
UL: STYLE 3271 125°C
CSA: AWM 125°C
VOLTAGE RATING: 600V
WEIGHT: 14 LBS/1000 FT

GeneralCable PART NUMBER

572320.35.S1.04

COLOR

GREEN/YELLOW

PRINT

*68A9378P16 125C 600V 16AWG 19STRD STYLE 3271 RJ AWM GENERAL
BRAND REX BRAND (WC) XP163119-GE/CSA AWM IA 125C 600V
CABLE FT1/IAM MIL-W-16878/16*

APPLICABLE SPECIFICATIONS

UL: STANDARD 758
CSA: CSA STANDARD C22.2 NO. 210.2
MIL: MIL-W-16878/16

REVISIONS	0	04/02/09	FIRST ISSUE	<p>GeneralCable 1600 West Main Street, Willimantic, CT 06226-1128 <u>The Power of One</u></p>	
REFERENCES	IEWC/GE 68A9378P16GNYL19			DRAWING NO: 12-1806	
	GeneralCable PART #572320.35.S1.04			DRAWN BY: CAD	
				APPROVED BY: M. LAJEUNESSE	
THIS DRAWING IS THE PROPERTY OF GeneralCable AND SHALL NOT BE REPRODUCED, COPIED, OR USED AS BASIS FOR THE MANUFACTURE OR SALE OF THIS DESIGN WITHOUT THE PERMISSION OF GeneralCable					