


GeneralCable  
UL STYLE 3271 #12AWG

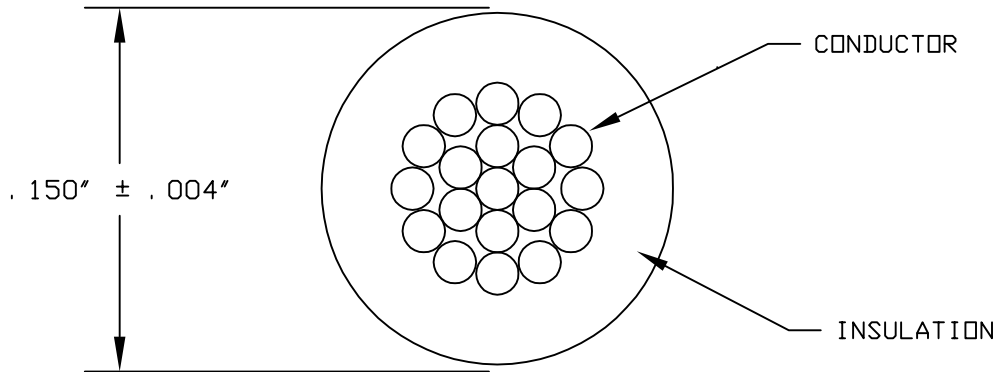

MATERIAL

CONDUCTOR: #12AWG 19/.0185 TINNED COPPER  
INSULATION: XLPE -.031" NOMINAL WALL  
DIAMETER: .150" NOMINAL

REQUIREMENTS

CONDUCTOR DIAMETER: 0.088"  
UL: STYLE 3271 125°C  
CSA: AWM 125°C  
VOLTAGE RATING: 600V  
WEIGHT: 29 LBS/1000 FT

GeneralCable PART NUMBERS

BLACK: 224300.00  
RED: 224300.02  
GRAY: 224300.08  
GREEN/YELLOW: 224300.35, S1.04

PRINT

"68A9378P12 125C 600V 12AWG 19STRD STYLE 3271 9J AWM GENERAL CABLE  
BRAND REX BRAND (WC) XP123119-GE/CSA AWM IA 125C 600V  
FT1/IAM MIL-W-16878/16"

APPLICABLE SPECIFICATIONS

UL: STANDARD 758  
CSA: CSA STANDARD C22.2 NO. 210.2  
MIL: MIL-W-16878/16

REVISIONS	0	03/29/12	FIRST ISSUE	<p><b>GeneralCable</b> 1600 West Main Street, Willimantic, CT 06226-1128 <u>The Power of One</u></p>	
REFERENCES	IEWC/GE 68A9378P12			DRAWING NO: 12-1890	
	GeneralCable P/N 224300			DRAWN BY: CAD	
				APPROVED BY: M. LAJEUNESSE	
				THIS DRAWING IS THE PROPERTY OF GeneralCable AND SHALL NOT BE REPRODUCED, COPIED, OR USED AS BASIS FOR THE MANUFACTURE OR SALE OF THIS DESIGN WITHOUT THE PERMISSION OF GeneralCable	