


GeneralCable
UL STYLE 3271 #10AWG

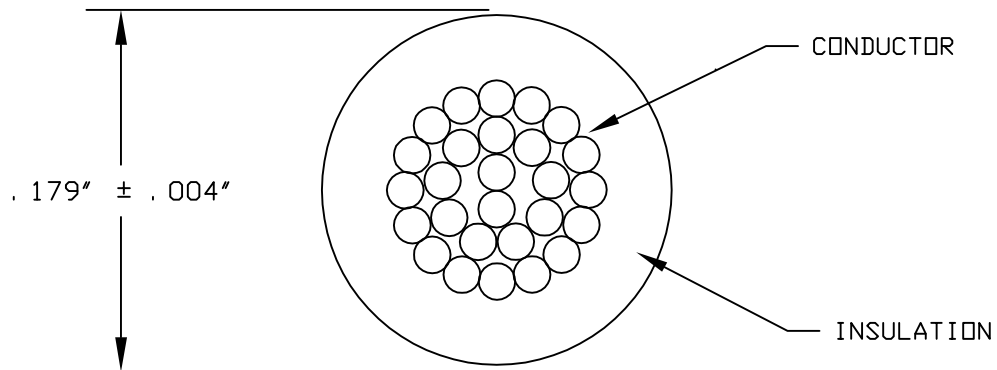

MATERIAL

CONDUCTOR: #10AWG 27/24 TINNED COPPER
INSULATION: XLPE -.031" NOMINAL WALL
DIAMETER: .179" NOMINAL

REQUIREMENTS

CONDUCTOR DIAMETER: 0.117"
UL: STYLE 3271 125°C
CSA: AWM 125°C
VOLTAGE RATING: 600V
WEIGHT: 44 LBS/1000 FT

GeneralCable PART NUMBERS

BLACK: 222120.00
RED: 222120.02
GRAY: 222120.08
GREEN/YELLOW: 222120.35.S1.04

PRINT

"68A9378P10 125C 600V 10AWG 27STRD STYLE 3271 RJ AWM GENERAL CABLE
BRAND REX BRAND (WC) XP123119-GE/CSA AWM IA 125C 600V
FT1/IAM MIL-W-16878/16"

APPLICABLE SPECIFICATIONS

UL: STANDARD 758
CSA: CSA STANDARD C22.2 NO. 210.2
MIL: MIL-W-16878/16

REVISIONS	0	03/23/12	FIRST ISSUE	<p>GeneralCable 1600 West Main Street, Willimantic, CT 06226-1128 <u>The Power of One</u></p>	
REFERENCES	IEWC/GE 68A9378P10			DRAWING NO: 12-1891	
	GeneralCable P/N 222120			DRAWN BY: CAD	
				APPROVED BY: M. LAJEUNESSE	
				THIS DRAWING IS THE PROPERTY OF GeneralCable AND SHALL NOT BE REPRODUCED, COPIED, OR USED AS BASIS FOR THE MANUFACTURE OR SALE OF THIS DESIGN WITHOUT THE PERMISSION OF GeneralCable	