


GeneralCable  
CROSSED-LINKED POLYETHYLENE #6AWG

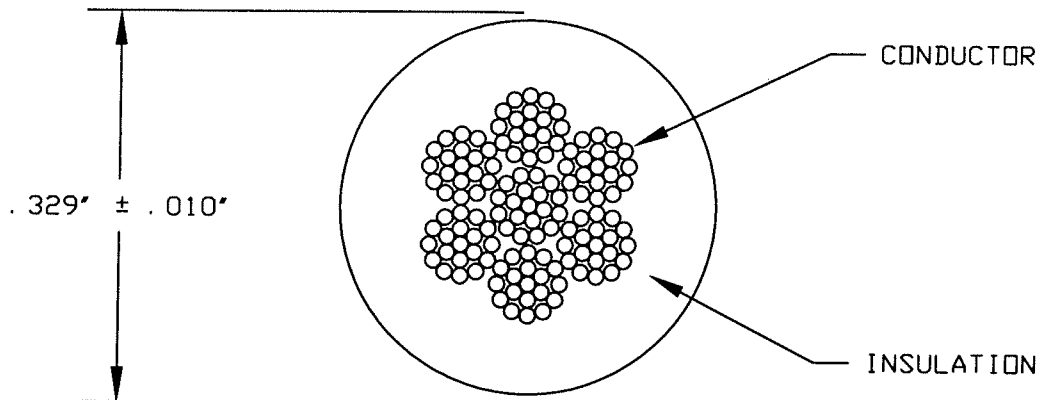

MATERIAL

CONDUCTOR: #6AWG 133/27 ROPE (7x19/27) TINNED COPPER  
 INSULATION: XLPE -.062" NOMINAL WALL  
 DIAMETER: .329" NOMINAL

REQUIREMENTS

CONDUCTOR DCR: 0.46 OHMS/1000' MAX @ 20°C  
 UL: STYLE 3271/CSA: AWM  
 TEMPERATURE RATING: 125°C  
 VOLTAGE RATING: 600V  
 WEIGHT: 121 LBS/1000 FT  
 COLOR: GREEN WITH YELLOW CO-EXTRUDED  
 STRIPE 30% - 40% COVERAGE

GeneralCable PART NUMBER

220020.35.S1.04

PRINT

\*68A9378P6 125C 600V 6AWG 133STRD STYLE 3271 RJ AWM GENERAL  
 CABLE BRAND REX BRAND (WC) XP0662133-GE/CSA AWM IA 125C  
 600V FT1/IAW MIL-W-16868/16\*

REVISIONS	0	09/22/08	FIRST ISSUE	<p>GeneralCable 1600 West Main Street, Willimantic, CT 06226-1128 <u>The Power of One</u></p>	
REFERENCES	IEWC			DRAWING NO: 12-1784	
	GeneralCable P/N 220020.35.S1.04			DRAWN BY: CAD	
				APPROVED BY: M. LAJEUNESSE	
				THIS DRAWING IS THE PROPERTY OF GeneralCable AND SHALL NOT BE REPRODUCED, COPIED, OR USED AS BASIS FOR THE MANUFACTURE OR SALE OF THIS DESIGN WITHOUT THE PERMISSION OF GeneralCable	