


GeneralCable
SINGLE CONDUCTOR #1/0AWG
125C 600V

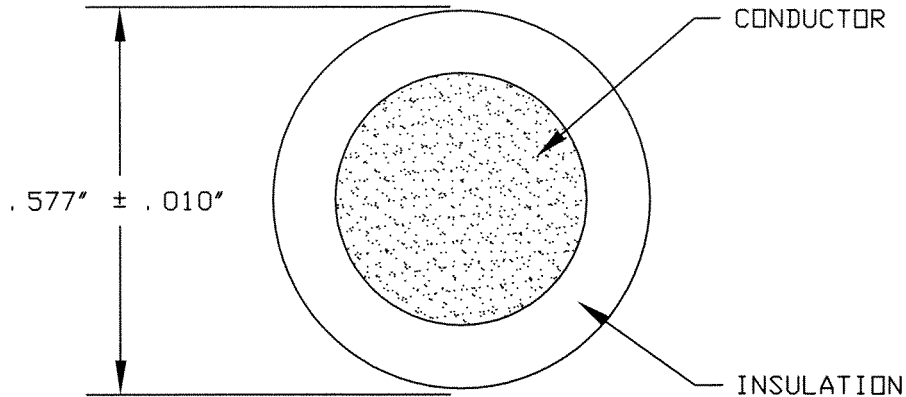

MATERIAL

CONDUCTOR: #1/0AWG 259/24 ROPE (37X7/24) TINNED COPPER- .413" NOM. O. D.
 INSULATION: IRRADIATION CROSS-LINKED POLYOLEFIN- .080" MIN. AVG. WALL
 DIAMETER: .577" NOMINAL

REQUIREMENTS

TEMPERATURE: 125°C
 VOLTAGE: 600V RMS
 CABLE WEIGHT: 415 LBS/1000 FT.

GeneralCable PART NUMBER

216300

PRINT LEGEND

*68A9378PO 125C 600V 1/0AWG 259STRAND STYLE 3271 RU AWM GENERAL CABLE
 XP1/082259-GE/CSA AWM IA 125C 600V FT1/IAW/M16878/16*

REVISIONS	0	10/08/14	FIRST ISSUE	<p style="font-size: 1.2em;">GeneralCable</p> <p>1600 West Main Street, Willimantic, CT 06226-1128</p> <p style="font-size: 1.2em;"><u>The Power of One</u></p>
REFERENCES	GE 68A9378			DRAWING NO: 11-2322
	GeneralCable P/N 216300			
	DRAWN BY: CAD		APPROVED BY: C. MEDLING	
THIS DRAWING IS THE PROPERTY OF GeneralCable AND SHALL NOT BE REPRODUCED, COPIED, OR USED AS BASIS FOR THE MANUFACTURE OR SALE OF THIS DESIGN WITHOUT THE PERMISSION OF GeneralCable				