

Inserts for M23 circular connectors

EPIC® SIGNAL M23 Inserts 12 pole for M23 circular connector series















Variety of approval certifications



Robust



Assembly time



Mechanical resistance



Good chemical resistance



Wind Energy



Industrial machinery and plant engineering

Benefits

Universal further processing of the M23 inserts through different packaging units. Fully assembled with suitable solder contacts or unpopulated for individual assembly with crimp or solder contacts

Application range

Plant engineering

Measurement and control technology

Apparatus construction

Last Update (23.04.2018)
©2018 Lapp Group - Technical changes reserved
Product Management www.lappkabel.de
You can find the current technical data in the corresponding data sheet.
PN 0456 / 02_03.16



Technical Data

Classification: ETIM 5.0 Class-ID: EC000438

ETIM 5.0 Class-Description: Contact insert for industrial

connectors

Rated voltage (V): according to IEC 61984: 100 V

Rated impulse voltage: 1.5 kV
Rated current (A): 7 A
Pollution degree: 3

Contact resistance: < 4 mOhm

Contacts: Gold-plated brass

Number of contacts: 13

Termination methods: Crimp termination: 0.14 - 1.0 mm²

Solder termination: up to 1.0 mm²

Cycle of mechanical operation: 100

VDE-tested: Certified production control: VDE-REG. no. C24 (according to

EN 61984, SELV according to DIN VDE 0100-410 has to be

guaranteed)

UL File Number: E249137

Temperature range: -25°C up to +125°C

Note


The inserts are suitable for both male and female contacts. For a complete connection, you will need one P-component and one E-component. P-component = left turning (anticlockwise), E-component = right turning (clockwise)


Photographs are not to scale and do not represent detailed images of the respective products.

Prices are net prices without VAT and surcharges. Sale to business customers only.

Article number	Article description	Inserts	Contacts included	Pin configuration
12-pin inserts, P-part = rotation to the left (plug side anticlockwise)				
73002712	P-part	Unpopulated	-	12
73002713	P-part	Unpopulated	-	12
73002714	P-part	+ male contacts, solder	12	12
73002715	P-part	+ male contacts, solder	12	12
73002716	P-part	+ female contacts, solder	12	12
73002717	P-part	+ female contacts, solder	12	12
12-pin inserts, E-part = rotation to the right (plug side clockwise)				
73002718	E-Part	Unpopulated	-	12
73002719	E-Part	Unpopulated	-	12
73002720	E-Part	+ male contacts, solder	12	12
73002721	E-Part	+ male contacts, solder	12	12
73002722	E-Part	+ female contacts, solder	12	12
73002723	E-Part	+ female contacts, solder	12	12



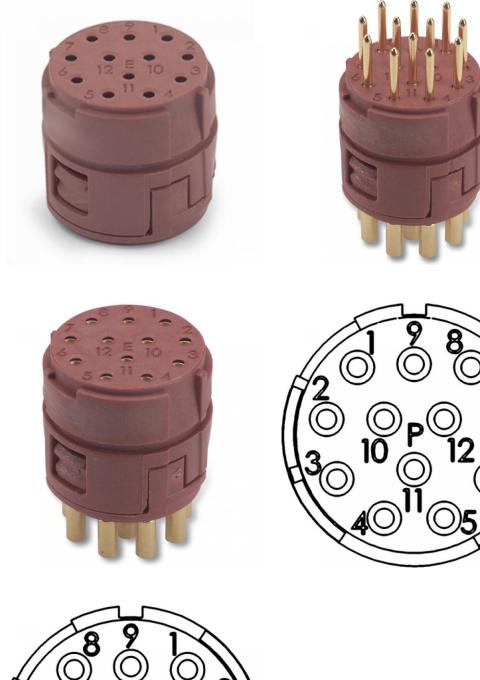

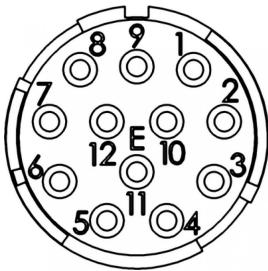

Last Update (23.04.2018)
©2018 Lapp Group - Technical changes reserved
Product Management www.lappkabel.de
You can find the current technical data in the corresponding data sheet.
PN 0456 / 02_03.16