

INCH-POUND

MIL-C-27072/62B
AMENDMENT 1
15 NOVEMBER 1996

MILITARY SPECIFICATION SHEET

CABLE, SPECIAL PURPOSE, ELECTRICAL, MULTICONDUCTOR
(2 CONDUCTORS) AND SINGLE SHIELDED
M27072/62JEDD*

This amendment forms a part of MIL-C-27072/62B, dated 10 May 1994,
and is approved for use by all Departments and Agencies of the
Department of Defense.

PAGE 2

DESIGN DATA:

Wire: Delete "M16878/5BGE*** (see table I)." "and substitute "MIL-W-22759/9-20"

PAGE 3

Concluding Material: Change to read as listed herein.

CONCLUDING MATERIAL

Custodians:

Army - CR
Navy - SH
Air Force - 85

Preparing Activity:
DLA-IS

(Project 6145-2131-09)

Review activity:

Air Force - 99
DLA-ES

AMSC N/A

FSC 6145

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

INCH-POUND

MIL-C-27072/62B
10 May 1994
SUPERSEDING
MIL-C-27072/62A
24 September 1987

MILITARY SPECIFICATION
CABLE, SPECIAL PURPOSE, ELECTRICAL; MULTICONDUCTOR
(2 CONDUCTORS) AND SINGLE SHIELDED
M27072/62JEDD*

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification and the latest issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-C-27072.

ⓑ

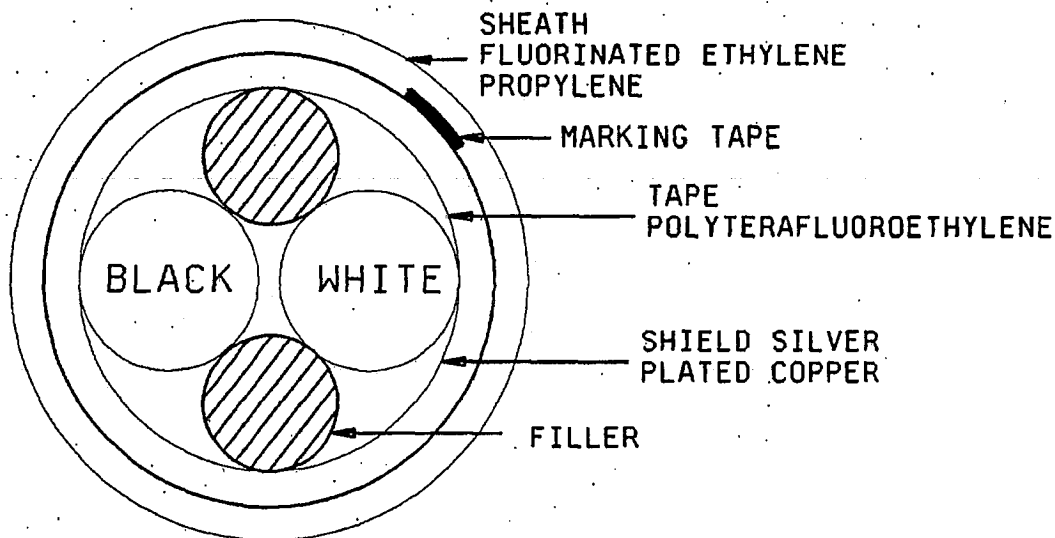


FIGURE 1. Cable configuration.

*The complete PIN requires a color code designator (see table I).

ⓑ denotes changes

DESIGN DATA:

Design and construction: See figure 1.

Number of conductors: Two.

Conductor size and stranding: See table I.

Ⓑ Wire: In accordance with M16878/5BGE* or MIL-W-16878/22BGE* (see table I)

Jacket undershield: Not applicable.

Shielding: Silver plated copper.

Sheath: Fluorinated ethylene propylene.

Temperature rating: 200°C.

REQUIREMENTS:

Visual and dimensional:

Components:

Basic wire: Silver plated copper.

Dimensions: See table I.

Primary insulation:

Material: Polytetrafluoroethylene.

Colors:

Black.

White.

Spark test voltage: 5,000 V rms.

Inspection test voltage: 3,000 V rms.

Impulse dielectric test: 8,000 V peak.

Jacket over insulation: Not applicable.

Wall thickness: Not applicable.

Color: Not applicable.

Filler:

Material: When used, shall be in accordance with MIL-C-27072.

Lay: 2.25 inches maximum.

Tape material: Polytetrafluoroethylene (optional).

Shield:

Material: Silver plated copper.

Gauge: 38 AWG.

MIL-C-27072/62B

Braid angle: 20 to 40 degrees.

Workmanship: In accordance with MIL-C-27072.

Sheath:

Material: Fluorinated ethylene propylene.

Wall thickness: .015 inch nominal.

ⓑ Tensile strength: In accordance with table V of MIL-C-27072.

B Elongation: In accordance with table V of MIL-C-27072.

Tension set: Not applicable.

Tear strength: Not applicable.

Accelerated aging: Not applicable.

Oil resistance: Not applicable.

Color: See table IV of MIL-C-27072.

Finished cable:

Diameter: See table I.

Conductor resistance: In accordance with MIL-W-16878/5 or MIL-W-16878/22.

Dielectric strength: In accordance with MIL-W-16878/5 or MIL-W-16878/22.

Cold bend: Mandrel size in accordance with table XIII of MIL-C-27072.

Ozone: Mandrel size in accordance with table XIV of MIL-C-27072.

Heat Stability: Not applicable.

TABLE I. Construction data.

PIN M27072/62	Conductor				Finished cable diameter (in.) ±10%	Basic wire MIL-W-16878/5 MIL-W-16878/22
	Wire size (AWG)	Number of strands	Strand size (AWG)	Nominal diameter (inches)		
JEDD*	20	19	32	.068	.200	BGE***

Asterisks (*) shall be replaced by the appropriate color designator.

MIL-C-27072/62B

CONCLUDING MATERIAL

Custodians:

Army - CR
Navy - SH
Air Force - 85

Review activities:

Air Force - 99
DLA - ES, IS

Preparing activity:

Air Force - 85

Agent:

DLA - ES

(Project 6145-2067-05)