



**NO O-RING  
REQUIRED!**



## Heyco® -Tite Liquid Tight Cordgrips

**Pigtail™, Metric Hubs with Integral Sealing Ring**

*The Ultimate in Liquid Tight Strain Relief Protection*



- Flexible Pigtail extender prevents sharp bends and extends cable life.
- Integral Sealing Ring ensures a superior seal at the clearance or threaded mounting hole location, every time.
- Widest range of approved cable diameters.
- IP 68 rated.
- Approved for **NEMA 4, 4X, 6 and 6P** applications.
- Ratchet design of sealing nut assembly provides superior anti-vibration protection and ensures a firm grip on the cable.
- Acme threads on body prevent skipping and speed installation.
- All nylon construction with Buna N or TPE sealing gland resists salt water, weak acids, gasoline, alcohol, oil, grease, and common solvents. (This feature is not assessed by UL.)
- Multiple sizes for flexible cord diameters ranging from .065" (1,7 mm) to .705" (17,9 mm).
- We recommend using the fitting with the smallest maximum diameter that will fit your application.
- **Unassembled Nylon Locknuts INCLUDED.**
- For Heyco Liquid Tight Threaded Plugs, see page 3-45.
- Consult Heyco for cordgrips molded in other colors.

CABLE DIA. RANGE				PART NO.			DESCRIPTION	UL or IEC	PART DIMENSIONS							
Minimum		Maximum		Including Nylon Nut* Black    Gray		No Nut Black ††			Clearance Hole Dia. in.    mm.	A Max. O.A. Length in.    mm.		B Thread Length in.    mm.		C Wrenching Nut Flats in.    mm.		
in.	mm.	in.	mm.													
.065	1,7	.210	5,3	<b>M4396</b>	<b>M4397</b>	<b>M4422</b>	Flex RLTCG M12	UL	4,73	12,0	2,44	62,0	.32	8,1	.63	16,0
.115	2,9	.250	6,4	<b>M4398</b>	<b>M4399</b>	<b>M4424</b>	Flex LTCG M12									
.065	1,7	.230	5,8	<b>M4400</b>	<b>M4401</b>	<b>M4426</b>	Flex RLTCG M16	UL	.630	16,0	2,77	70,4	.32	8,1	.83	21,1
.105	2,7	.315	8,0	<b>M4402</b>	<b>M4403</b>	<b>M4428</b>	Flex LTCG M16									
.095	2,4	.290	7,4	<b>M4404</b>	<b>M4405</b>	<b>M4430</b>	Flex RLTCG M20	UL	.787	20,0	3,89	98,8	.41	10,4	.98	24,9
.170	4,3	.450	11,4	<b>M4406</b>	<b>M4407</b>	<b>M4432</b>	Flex LTCG M20									
.260	6,6	.545	13,8	<b>M3270</b>	<b>M3271</b>	-	Flex LTCG LL M20	UL	.787	20,0	4,34	110,2	.41	10,4	1,06	26,9
.250	6,4	.490	12,4	<b>M4408</b>	<b>M4409</b>	<b>M4434</b>	Flex RLTCG M25									
.435	11,1	.705	17,9	<b>M4410</b>	<b>M4411</b>	<b>M4436</b>	Flex LTCG M25	UL	.985	25,0	5,04	128,0	.52	13,2	1,30	33,0

Standard colors black and gray.

\*Nylon locknuts shipped unassembled

††For No Nut Part Nos. in gray color please visit our Cordgrip product section at heyco.com

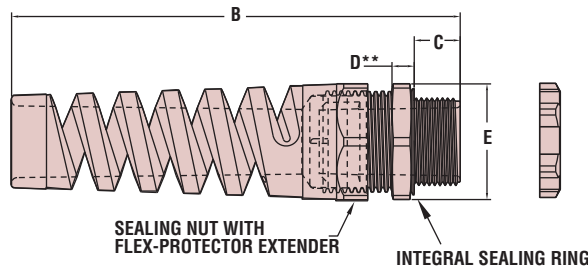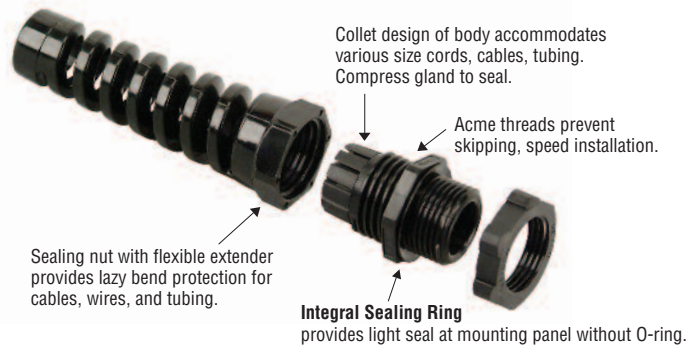

\*\*Consult Heyco for Wrenching Nut Thickness "D"

*Quick  
Specs*

Material	Nylon 6/6 w/Buna N or TPE Sealing Gland
Certifications	<ul style="list-style-type: none"> <li>UL Listed under Underwriters' Laboratories File E51579</li> <li>UL Recognized under Components Program of Underwriters' Laboratories File E51579</li> <li>CSA Certified by Canadian Standards Association File 93876C</li> <li>Approved for NEMA 4, 4X, 6 and 6P Applications</li> <li>VDE Marks License 136681</li> <li>CE Per CE Low Voltage Directive 73/23/EEC</li> </ul>
Flammability Rating	94V-2
Temperature Range	Static -40°F (-40°C) to 239°F (115°C) Dynamic -4°F (-20°C) to 212°F (100°C)
IP Rating	IP 68 (70 PSI, 5 BAR)