



**Micro WET-CON SERIES
MC-BH-M
(2 - 8 contacts)**

Micro WET-CON Bulkhead Connector Male Plug
Mates with MC-IL-F
Dummy Connector: MC-DC-F

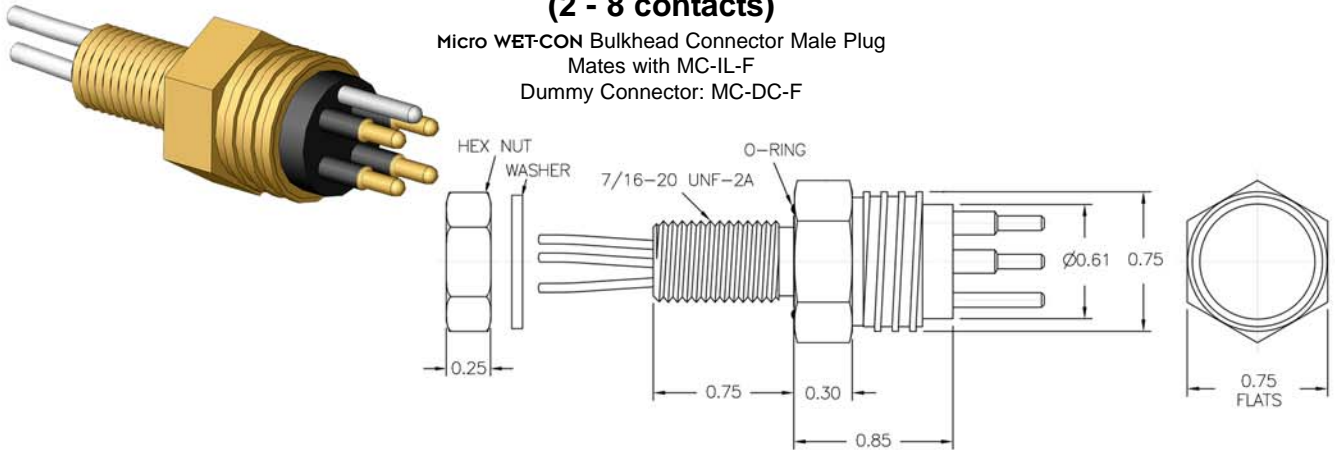


**Micro WET-CON SERIES
MC-BH-F
(2 - 8 contacts)**

Micro WET-CON Bulkhead Connector Female Socket
Mates with MC-IL-M
Dummy Connector: MC-DC-M

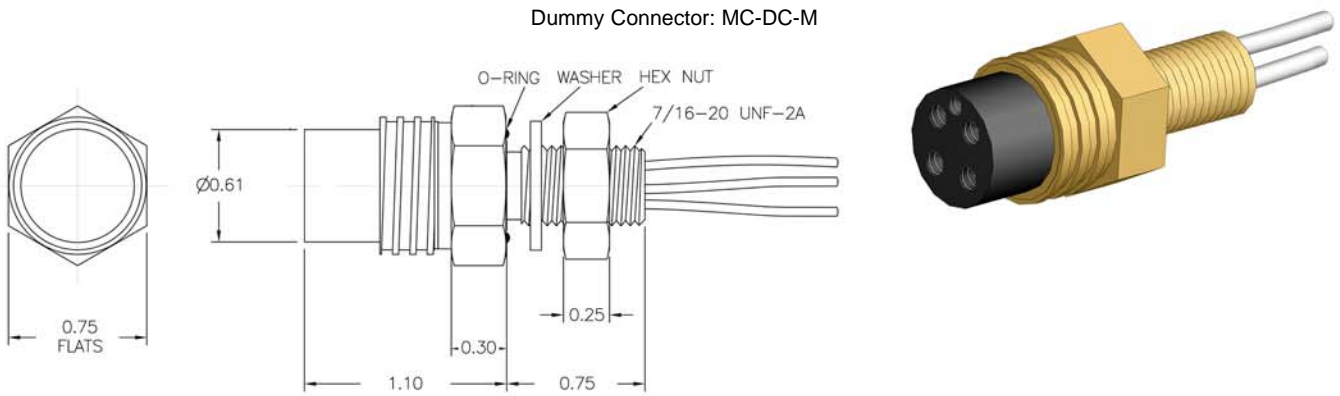

**Micro WET-CON SERIES
HEX NUT AND WASHER
(2 - 8 contacts)**

Micro WET-CON Bulkhead Connector

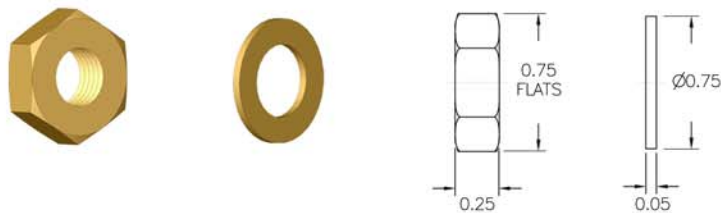

STD - BRASS
(Stainless Steel and others upon request)

NOTES:

- Hex Nut and Washer: Optional.
- O-Ring: 2-014.
- Dummy Connector: Optional.
- Dummy Shorting Plug Connector: Optional.
- Connectors must be lubricated prior to mating.
- Torque values referenced in this literature assume installation into dry metal threads. For other applications, please contact SEA CON® for recommendations.
- Connectors are designed for installation on one atmosphere vessels. Contact SEA CON® for recommendations if using compensated vessels.