



NOTE: ALL MATERIAL COMPLIANT ROHS STANDARD

REVISION INFORMATION			
Rev.	Rev. Date	Modified By	Brief Description
A/0	2017.09.21	LM	NEW
A/1	2021.03.18	Arvin	Add "Plug Size" "Wire printing" "Operating temperature"

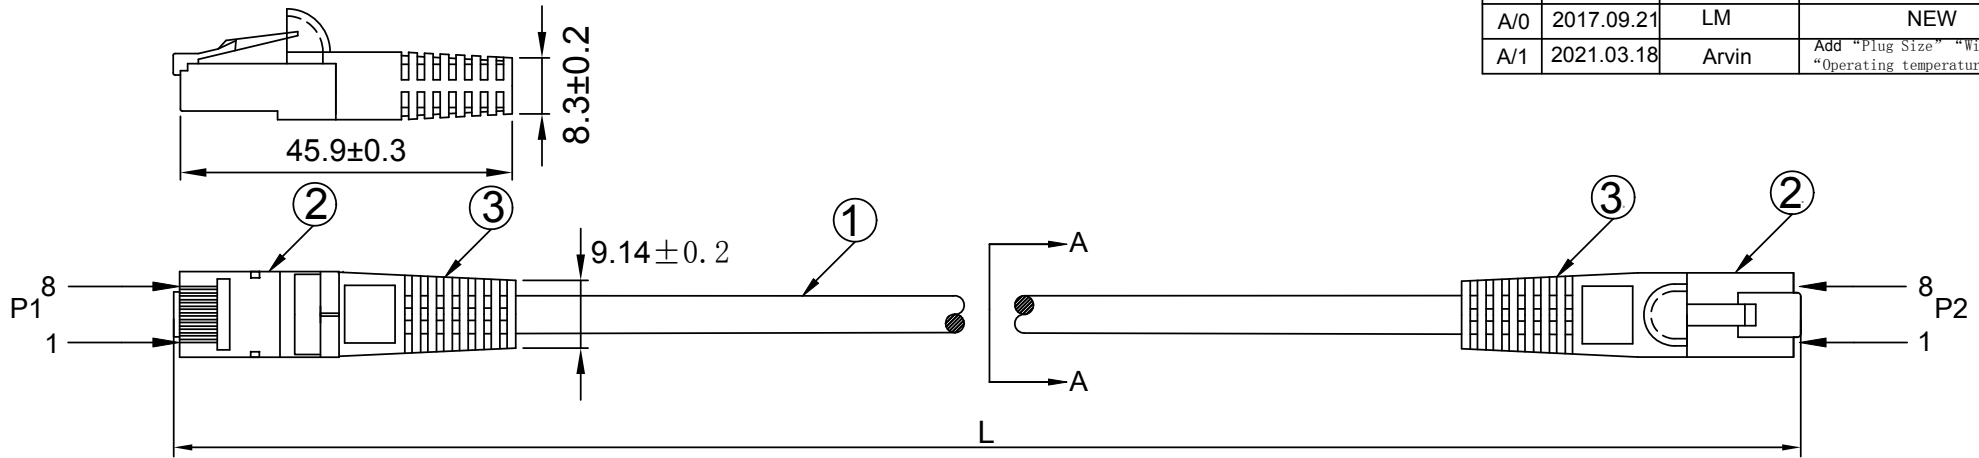

INK MARKING<FP2049> : YFC CAT.6 S/FTP PATCH CABLE 3P VERIFIED TO ANSI/TIA-568.2-D ▲ 26AWGX4P CMX(UL) E164469-XX

Operation Temperature:-20°C~+60°C  
 conductor resistance:152↓(Ω/Km)at20°C

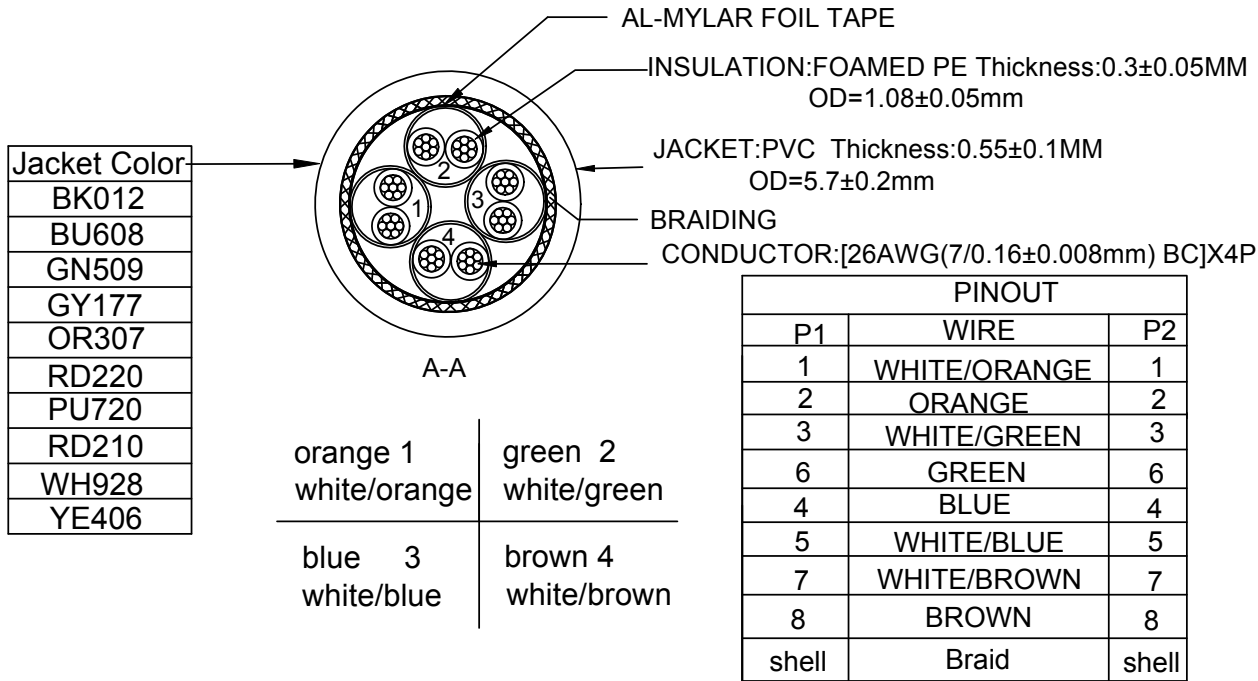

L(ft)	T(inch)	T(%)	L(ft)	T(inch)	T(%)
0.5	±0.6	10%	25	±4	1.33%
1	±1.2	10%	35	±6	1.43%
2	±1.2	5%	40	±6	1.25%
3	±1.2	3.33%	50	±6	1.0%
4	±1.2	2.5%	60	±6	0.83%
5	±1.2	2%	75	±6	0.67%
6	±1.2	1.67%	85	±6	0.59%
7	±2	2.38%	100	±6	0.5%
10	±2	1.67%	110	±6	0.45%
13	±2	1.28%	120	±6	0.42%
15	±3.15	1.75%	125	±6	0.4%
16	±3.15	1.64%	150	±6	0.33%
20	±4	1.67%	175	±6	0.29%
			200	±6	0.25%

③	MOLD	PVC YUS-07	A/R	Kg
②	PLUG	8P8C 50U RJ45 SHIELDED	2	PCS
①	CABLE	CAT.6 SSTP PVC 26AWG*4P BC	A/R	M
NO.	PART NAME	SPECIFICATION DESCRIPTION	QT'Y	UNIT

DRAWN BY Arvin	DATE: 2021/03/18	DESCRIPTION: LAN PATCH C6 SSTP 26AWG 4P
CHECKED BY YB	SHEET 1 of 1	ITEM NO. MS64CZPAXXMBXXX
APPROVED BY CQ	SCALE 1:1	REV. 01 UNIT:mm