


# SLIPSTRIP 450R UL5359 CSA I A/B

## 450° C. - 600 Volt

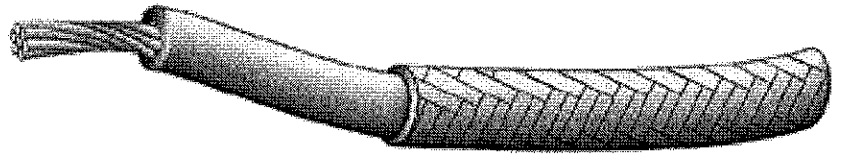

### Applications

Wiring of ovens or similar high temperature equipment. To be used where the acceptability, including current-carrying capacity, has been determined by UL.

### Construction

Conductor - 27% Nickel Plated Copper

Insulation - Composite Mica Tape, Fiberglass Braid, High Temperature Saturant

### Listings

450° C., 600 volt: UL5359; CSA: Class I, Group A/B

Catalog Number	Size (AWG)	Stranding (No./AWG)	Insulation Thickness (mils)	Overall Diameter (inches)	Weight (lbs/1000 ft)
CMGR6-227	22	7/30	16	.077	5
CMGR6-2010	20	10/30	16	.083	6
CMGR6-1816	18	16/30	16	.092	9
CMGR6-1626	16	26/30	16	.104	12
CMGR6-1441	14	41/30	16	.119	18
CMGR6-1265	12	65/30	16	.140	28
CMGR6-10105	10	105/30	20	.185	42
CMGR6-8133	8	133/29	20	.227	66
CMGR6-6133	6	133/27	20	.268	99
CMGR6-4133	4	133/25	20	.321	151
CMGR6-2133	2	133/23	25	.415	241

All figures referenced are nominal.