

450C/300V and 450C/600V

MGT 450

HIGH-TEMPERATURE LEAD WIRE

RATINGS / APPROVALS

450°C - 300 Volts - UL 5128 / CSA AWM I A/B FTI

450°C - 600 Volts - UL 5107 / CSA AWM I A/B FTI

CONSTRUCTION

Conductors

24 AWG - 6 AWG (300 Volts)

24 AWG - 4/0 AWG (600 Volts)

Stranded nickel-coated copper - 27%

(Other conductor materials available)

Insulating System

Mica Tape

Outer Covering

Fiberglass braid with high temperature finish


Standard Color Coding

Natural and Solid Colors

Colored Tracers

CHARACTERISTICS

- Resists braid fray and push back
- Withstands mechanical abuse

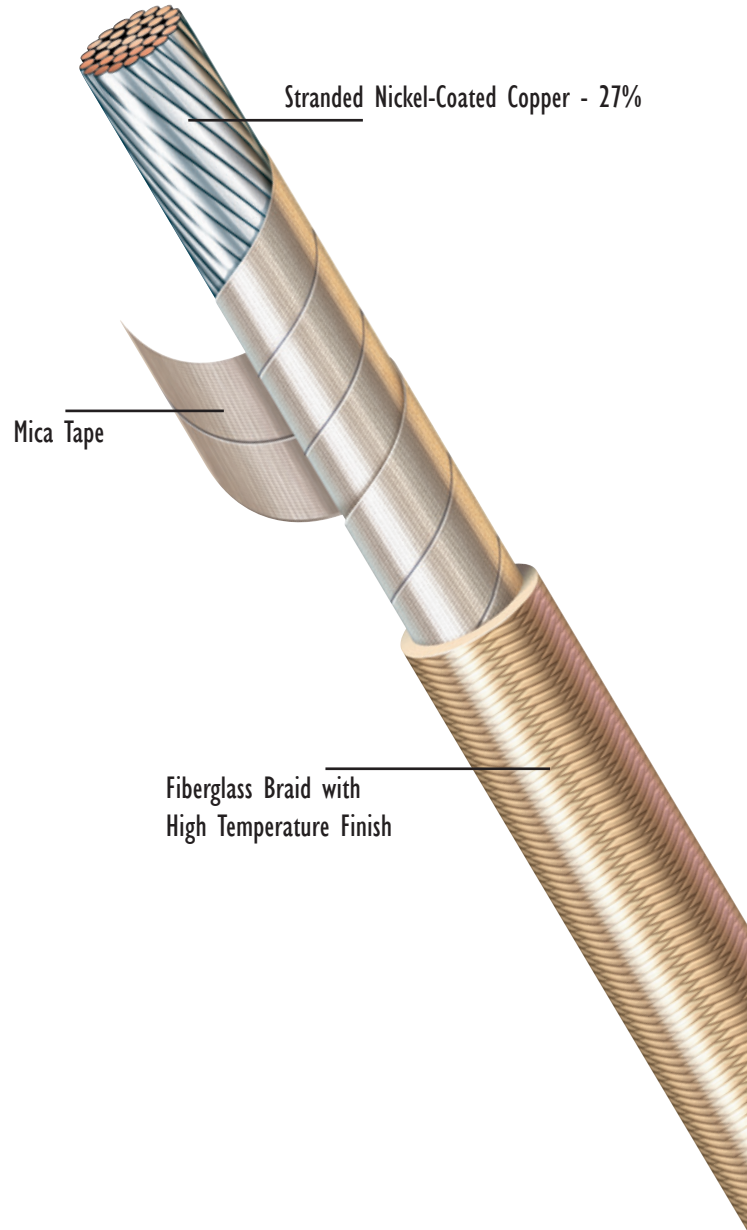

COPYRIGHT

This document is protected under copyright law and is the property of Radix Wire and Cable. Data contained herein is confidential to Radix Wire and Cable and this document and/or any part of the data contained herein may not be copied, duplicated or released for manufacturing or sale of equipment outside of Radix Wire and Cable or any affiliates without the prior written authorization of Radix Wire & Cable.

Radix[™]

WIRE & CABLE

EST. 1944

SPECIFICATIONS

MGT 450 HIGH-TEMPERATURE LEAD WIRE

MGT 450C/300V

Part No.	Awg. Size	# Strands	Outer Dia. inches	Outer Dia. mm	Wgt. (lbs/Mft)	Wgt (kg/km)	Min. Bend Radius (in)	UL	CSA
BDT24C007	24	7	0.072	1.83	4	5.94	0.58	5128	AWM I A/B FT I
BDT22C007	22	7	0.079	2.01	6	8.27	0.63	5128	AWM I A/B FT I
BDT20C010	20	10	0.085	2.16	7	10.33	0.68	5128	AWM I A/B FT I
BDT18C016	18	16	0.093	2.36	9	13.32	0.74	5128	AWM I A/B FT I
BDT16C026	16	26	0.105	2.67	13	18.90	0.84	5128	AWM I A/B FT I
BDT14C041	14	41	0.121	3.07	19	27.58	0.97	5128	AWM I A/B FT I
BDT12C065	12	65	0.141	3.58	27	40.27	1.13	5128	AWM I A/B FT I
BDT10C105	10	105	0.189	4.80	46	68.61	1.51	5128	AWM I A/B FT I

MGT 450C/600V

Part No.	Awg. Size	# Strands	Outer Dia. inches	Outer Dia. mm	Wgt. (lbs/Mft)	Wgt (kg/km)	Min. Bend Radius (in)	UL	CSA
BFT22C007	22	7	0.100	2.54	8	11.39	0.80	5107	AWM I A/B FT I
BFT20C010	20	10	0.104	2.64	9	13.23	0.83	5107	AWM I A/B FT I
BFT18C016	18	16	0.110	2.79	11	16.77	0.88	5107	AWM I A/B FT I
BFT16C026	16	26	0.126	3.20	15	22.77	1.01	5107	AWM I A/B FT I
BFT14C041	14	41	0.139	3.53	22	32.34	1.11	5107	AWM I A/B FT I
BFT12C065	12	65	0.157	3.99	31	46.45	1.26	5107	AWM I A/B FT I
BFT10C105	10	105	0.208	5.28	83	123.30	1.66	5107	AWM I A/B FT I
BFT08C133	8	133	0.262	6.65	79	118.15	2.10	5107	AWM I A/B FT I
BFT06C133	6	133	0.313	7.95	113	167.74	2.50	5107	AWM I A/B FT I
BFT04C133	4	133	0.368	9.35	167	248.46	2.94	5107	AWM I A/B FT I
BFT02C259	2	259	0.446	11.33	259	385.99	3.57	5107	AWM I A/B FT I
BFTX1C259	1/0	259	0.533	13.54	392	583.39	4.26	5107	AWM I A/B FT I
BFTX2C259	2/0	259	0.586	14.88	488	726.26	4.69	5107	AWM I A/B FT I
BFTX3C259	3/0	259	0.643	16.33	605	900.38	5.14	5107	AWM I A/B FT I
BFTX4C259	4/0	259	0.707	17.96	750	1116.18	5.66	5107	AWM I A/B FT I

Standard conductor: Nickel Coated Copper - 27%
Consult factory for alternative conductor and stranding options.



WIRE & CABLE
EST. 1944

Radix Wire & Cable
26000 Lakeland Boulevard, Euclid, OH 44132
Tel: 216 731-9191 • Fax: 216 731-7082
www.radix-wire.com

All dimensions listed above are nominal
Compliance: UL Listed File No. E22244, CSA Certified File No. LL13427 or LL80670
Information included in this catalog is intended as a guideline only. For applications that require tight tolerances, please contact the Radix factory for dimensional verification. Information herein is believed to be accurate as of publication date; however, if an error exists it is unintentional and Radix Wire & Cable is not responsible for any claim traceable to such error.

Use or disclosure of data contained on this sheet is subject to the restrictions on the title page.