

T-Shapes, VG style

• Helashrink 1200 Series, Offset


This style provides strain relief, sealing and mechanical protection where a cable transition is required on the harness, it is recommended that an adhesive be used if environmental sealing is required.



1204-1 supplied / fully recovered.



a: Expanded form (supplied)

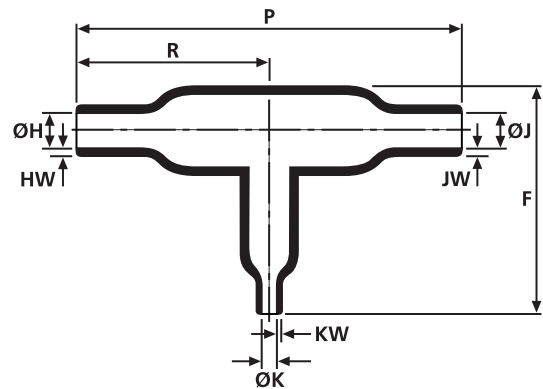

b: Fully recovered form (after heating)

Sizes and Type Table														
Type	Designation as per VG-Norm	ØH min. a	ØH max. b	ØJ min. a	ØJ max. b	ØK min. a	ØK max. b	P ± 10%	R ± 10%	HW ± 20%	JW ± 20%	KW ± 20%	S ± 10%	F ± 15%
1204-1	VG95343T08A016A	13.0	7.5	6.5	4.0	6.5	4.0	56.0	33.0	1.5	1.0	1.0	-	27.0
1216-1	VG95343T08A017A	33.0	13.0	16.5	6.5	16.5	6.5	97.0	54.0	2.5	1.5	1.5	38.5	-
1226-1	-	30.5	15.2	17.8	8.9	17.8	8.9	81.3	47.5	2.3	1.3	1.3	38.1	-

All dimensions in mm. Subject to technical changes.

For Material / Adhesive selection and other information please refer to page 10.

Combinations "On request"					
Adhesive	Material				
	B7	G	J	H	L
WM250	√	√	√	√	-
W8	√	√	√	√	-
W24	√	√	√	√	√
V9500	√	√	√	√	-
HMT200A	√	√	√	√	-
W21	-	-	-	√	-
Without Adhesive	√	√	√	√	√

Standard combinations	
Article-No.	Type
412-04180	1204-1-G
412-16180	1216-1-G
412-26002	1226-1-G