

200C/600V and 200C/1000V

# SIL-A-BLEND® 200

## HIGH-TEMPERATURE LEAD WIRE

### RATINGS / APPROVALS

200°C - 600 Volts - UL Style 3512/3604 / CSA AWM I A/B FT2

200°C - 1000 Volts - UL Style 3644 / CSA AWM I A/B FT2

### CONSTRUCTION

#### Conductors

22 AWG - 4/0 AWG

Stranded tinned copper or nickel-plated copper  
(Other conductor materials available)

#### Insulating System

Separator tape between conductor and silicone on sizes 10awg to 4/0 on UL Style 3644 only. (Not shown in illustration)

Composite Extruded Silicone Rubber with intermediate fiberglass reinforcement

#### Standard Color Coding


Available in Colors

### CHARACTERISTICS

- Outperforms Braided Silicone products
  - Eliminates braid fraying, flowering, and shrink back
  - Virtually eliminates skin irritation
  - Reduces airborne fiberglass contaminants traditionally found in high volume processing
  - Superior flexibility
  - Color stable at elevated temperatures
  - LSZH - Low smoke, zero halogen
  - Suitable for varnish dip and bake applications
  - Smaller OD
- Silicone formulations suitable for UV, ozone, moisture exposure. Not suited for immersed applications.
- Suitable for applications to -60°C

150°C version with flexible stranded conductor is available.

(consult factory)

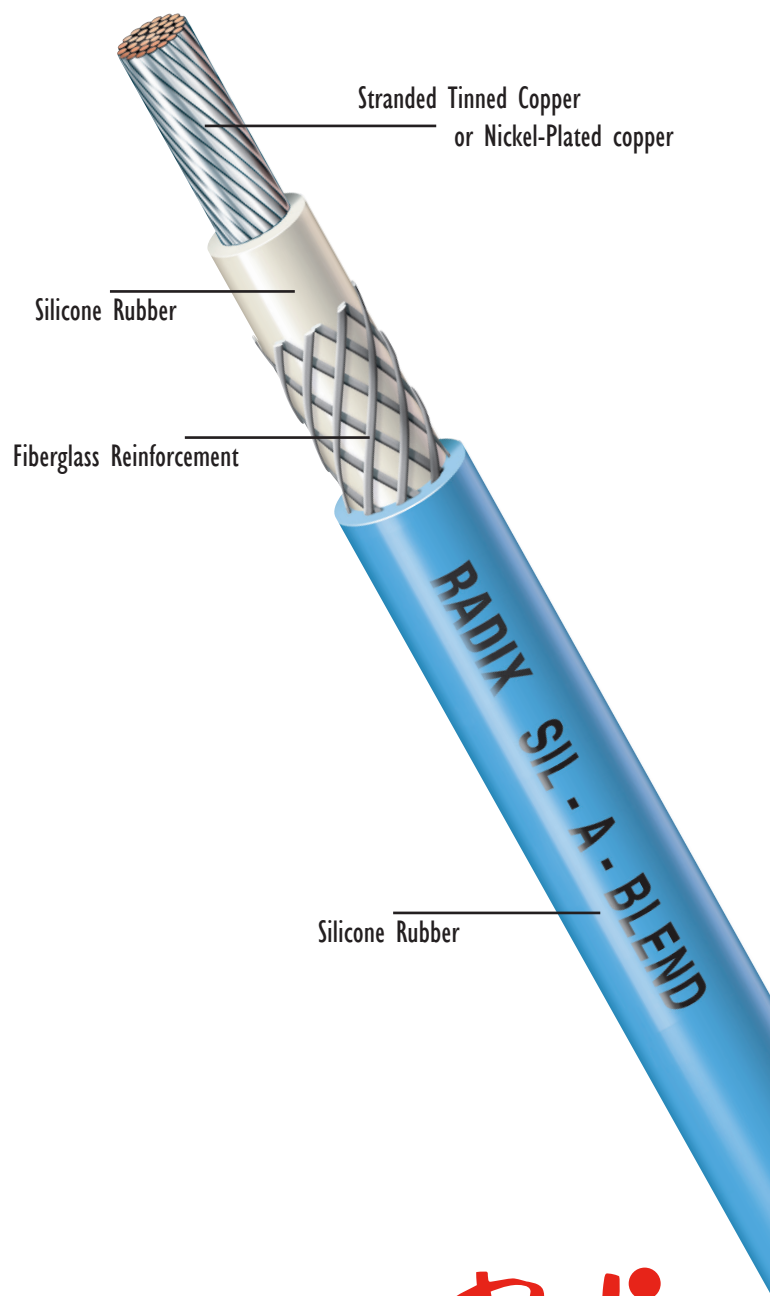

**Radix™**

Radix Wire  
26000 Lakeland Boulevard, Cleveland, OH 44132  
Tel: 216 731-9191 • Fax: 216 731-7082  
[www.radix-wire.com](http://www.radix-wire.com)

# SIL-A-BLEND® 200

## HIGH-TEMPERATURE LEAD WIRE

### SPECIFICATIONS

#### SIL-A-BLEND 200C/600V

Part No.	Awg. Size	# Strands	Outer Dia. inches	Outer Dia. mm	Wgt - lbs per 1000 ft	Wgt - kg per km	UL	CSA 180C
NBA22P007	22	7	0.100	2.54	6.61	9.83	3512/3604	AWM I A/B FT 2
NBA20P007	20	7	0.110	2.79	8.36	12.44	3512/3604	AWM I A/B FT 2
NBA18T007	18	7	0.121	3.07	11.34	16.87	3512/3604	AWM I A/B FT 2
NBA16T007	16	7	0.134	3.40	14.38	21.40	3512/3604	AWM I A/B FT 2
NBA14T007	14	7	0.140	3.55	19.75	29.39	3512/3604	AWM I A/B FT 2
NBA12T019	12	19	0.166	4.22	28.52	42.44	3512/3604	AWM I A/B FT 2
NBA10T019	10	19	0.215	5.46	47.30	70.39	3512/3604	AWM I A/B FT 2
NBA08T061	8	61	0.254	6.45	72.95	108.56	3512/3604	AWM I A/B FT 2
NBA06T084	6	84	0.347	8.81	118.18	175.87	3512/3604	AWM I A/B FT 2
NBA04T133	4	133	0.381	9.67	161.70	240.64	3512/3604	AWM I A/B FT 2
NBA02T259	2	259	0.446	11.33	239.70	356.70	3512/3604	AWM I A/B FT 2
NBA01T259	1	259	0.521	13.23	310.44	462.00	3512/3604	AWM I A/B FT 2
NCAX1T259	1/0	259	0.576	14.63	391.31	582.33	3604	AWM I A/B FT 2
NCAX2T259	2/0	259	0.622	15.80	482.18	717.56	3604	AWM I A/B FT 2
NCAX3T259	3/0	259	0.671	17.04	590.86	879.30	3604	AWM I A/B FT 2
NCAX4T259	4/0	259	0.731	18.57	730.23	1086.70	3604	AWM I A/B FT 2

#### SIL-A-BLEND 200C/1000V

Part No.	Awg. Size	# Strands	Outer Dia. inches	Outer Dia. mm	Wgt - lbs per 1000 ft	Wgt - kg per km	UL	CSA 180C
NGA18T007	18	7	0.121	3.07	11.34	16.87	3644	AWM I A/B FT 2
NGA16T007	16	7	0.134	3.40	14.38	21.40	3644	AWM I A/B FT 2
NGA14T007	14	7	0.140	3.55	19.75	29.39	3644	AWM I A/B FT 2
NGA12T019	12	19	0.166	4.22	28.52	42.44	3644	AWM I A/B FT 2
NGA10T019	10	19	0.215	5.46	47.30	70.39	3644	AWM I A/B FT 2
NGA08T061	8	61	0.254	6.45	72.95	108.56	3644	AWM I A/B FT 2
NGA06T084	6	84	0.347	8.80	117.62	175.04	3604/3644	AWM I A/B FT 2
NGA04T133	4	133	0.381	9.67	161.70	240.64	3604/3644	AWM I A/B FT 2
NGA02T259	2	259	0.446	11.33	239.70	356.70	3604/3644	AWM I A/B FT 2
NGA01T259	1	259	0.521	13.23	310.44	462.00	3604/3644	AWM I A/B FT 2
NGAX1T259	1/0	259	0.576	14.63	391.31	582.33	3604/3644	AWM I A/B FT 2
NGAX2T259	2/0	259	0.622	15.80	480.18	714.59	3604/3644	AWM I A/B FT 2
NGAX3T259	3/0	259	0.671	17.04	590.85	879.28	3604/3644	AWM I A/B FT 2
NGAX4T259	4/0	259	0.731	18.57	730.23	1086.70	3604/3644	AWM I A/B FT 2

Standard conductor: Tinned Copper or Nickel Plated Copper (Standard conductor for 20-22 AWG Only: Nickel Plated Copper - 2%)

Consult factory for alternative conductor and stranding options.

All dimensions listed above are nominal  
 Compliance: UL Listed File No. E22244. CSA Certified File No. LL13427 or LL80670  
 Information included in this catalog is intended as a guideline only. For applications that require tight tolerances, please contact the Radix factory for dimensional verification. Information herein is believed to be accurate as of publication date; however, if an error exists it is unintentional and Radix Wire is not responsible for any claim traceable to such error.



Radix Wire  
 26000 Lakeland Boulevard, Cleveland, OH 44132  
 Tel: 216 731-9191 • Fax: 216 731-7082  
 www.radix-wire.com