


GeneralCable

EIGHT CONDUCTOR #18AWG FLEX CABLE

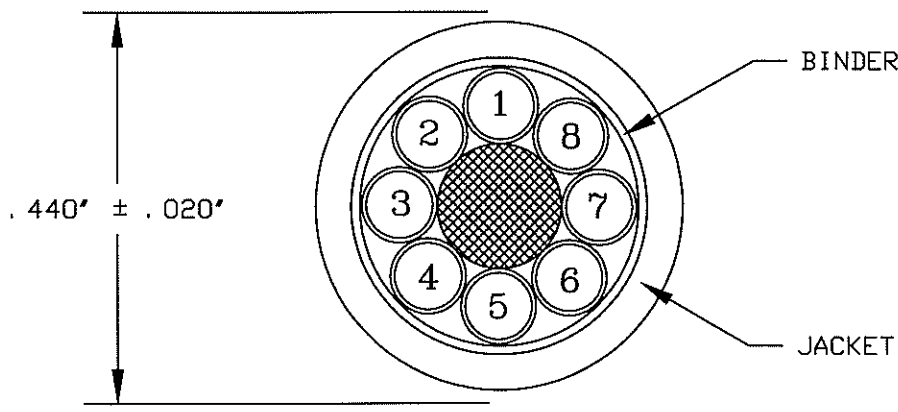

COMPONENT I - CONDUCTOR: #18AWG 19/.0092 BARE COPPER
 (ITEMS 1-8) INSULATION: PVC-.015" NOMINAL WALL
 SHEATH: NYLON (CLEAR) -.005" NOM. WALL
 DIAMETER: .087" NOMINAL

FILLERS - AS REQUIRED TO MAINTAIN A CIRCULAR CABLE CROSS-SECTION

CABLE - CORE: ONE (1) FILLER PULLED IN
 LAYER I: EIGHT (8) COMPONENT I (ITEMS 1-8)
 CABLED AROUND FILLER WITH A L. H. LAY

BINDER - .001" MYLAR TAPE TAPE-25% MINIMUM OVERLAP

JACKET - NEOPRENE (BLACK)-.060" NOMINAL WALL

DIAMETER - .440" ± .020"

NET CABLE WGT- 164 LBS/1000'

JACKET PRINT- *GENERAL CABLE BRAND REX BRAND (WC) NVN 90C FLEXIBLE CONTROL
 CABLE 600V TYPE TC SUN RES 8/C 18AWG TFFN (UL) DAY/MONTH/YEAR*

COLOR CODE -	ITEM NUMBER	COLOR
	1	BLACK
	2	WHITE
	3	RED
	4	GREEN
	5	ORANGE
	6	BLUE
	7	WHITE/BLACK
	8	RED/BLACK

REVISIONS	0	11/28/05	FIRST ISSUE	GeneralCable 1600 West Main Street, Willimantic, CT 06226-1128 <u>The Power of One</u>
REFERENCES	IEWC			DRAWING NO: 12-1639
	GeneralCable P/N 256510 T-14487 (8/18)			DRAWN BY: W. DRABEK
				APPROVED BY: M. LAJEUNESSE
				THIS DRAWING IS THE PROPERTY OF GeneralCable AND SHALL NOT BE REPRODUCED, COPIED, OR USED AS BASIS FOR THE MANUFACTURE OR SALE OF THIS DESIGN WITHOUT THE PERMISSION OF GeneralCable