



Endurance

GigE Vision® Cable Assemblies

Endurance Vision Cable Assemblies are designed and built to exceed motion and vision system application requirements. Engineered with the industry's first industrial-grade dual over-mold connectors, Endurance cable assemblies provide increased strength and enhanced performance.

SPECIFICATIONS

CABLE

Part Number : # FAWM248-034

Outer Diameter : 0.245" (6.223 mm)

Outer Jacket : Northwire EnduroFLEX® I TPE Dark Matte Green

Max. Temperature Rating : 80°C

Max. Operating Voltage – UL : 30V

Flex Life : Tested > 12 Million Cycles Northwire Standardized Flex Test Protocol Mode A*

Compliance : UL recognized AWM Style
 CSA certified
 RoHS compliant
 Certified to perform to CAT5e patch specification up to 60 meters

Flame Test : FT1




ASSEMBLY

Length Tolerance : +5%/-0%

Connector : TIA/ EIA 568 A, Molded RJ-45, Internally Shielded

*For Northwire Standardized Flex Test Protocol, go to www.northwire.com/fix

DIMENSIONS

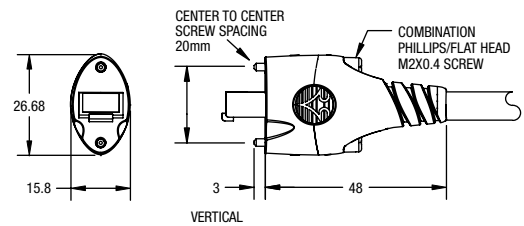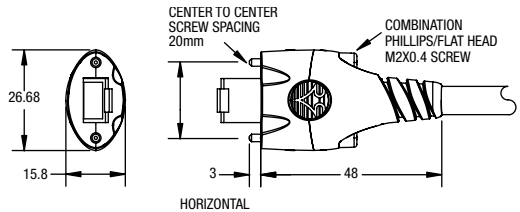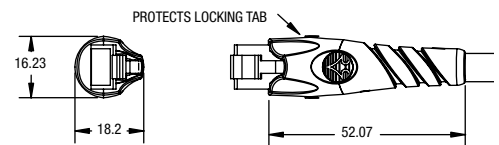

Screwdriver included with screw locking assemblies

STANDARDS, AGENCY AND ENVIRONMENTAL COMPLIANCE:

