



Endurance

Camera Link® Cable Assemblies

- Industrial grade for cameras and frame grabbers
- Standard and PoCL® (Power over Camera Link) versions available
- Assemblies meet both Appendixes D and E requirements of the Camera Link® specification
- Passed 19 million cycles in NSFTP mode A testing*
- Dual-shield construction with a 100 percent foil and 65 percent braid shield

SPECIFICATIONS

CABLE

Part Number : # FAWM2822-05

Outer Diameter : 0.355" (9.017 mm)

Outer Jacket : Northwire EnduroFLEX® I TPE Dark Matte Green

Max. Temperature Rating : 80°C

Max. Operating Voltage – UL : 30V

Flex Life : Tested > 19 Million Cycles Northwire Standardized Flex Test Protocol Mode A*

Compliance : Meets the Requirements of Appendix D of the Camera Link® Specification
 UL recognized AWM Style
 CSA certified
 RoHS compliant

Flame Test : VW-1, FT1




ASSEMBLY

Length Tolerance : ≤9m : +5% / -0%
 10m : +0% / -5%

Connector : Camera Link Specified, Internally Shielded 360°

*For Northwire Standardized Flex Test Protocol, go to www.northwire.com/fix

DIMENSIONS

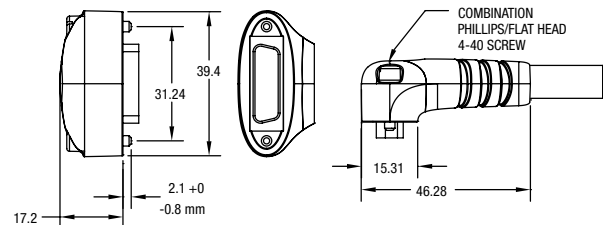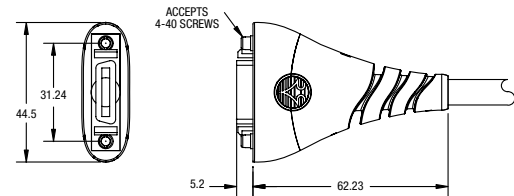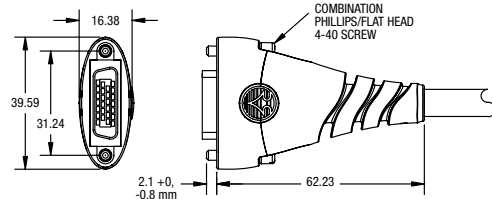

Screwdriver included with screw locking assemblies

STANDARDS, AGENCY AND ENVIRONMENTAL COMPLIANCE:

